
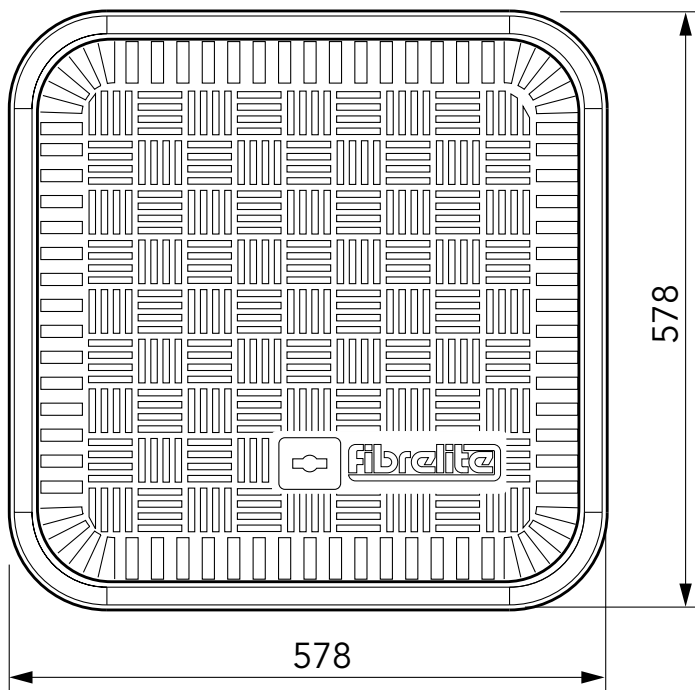
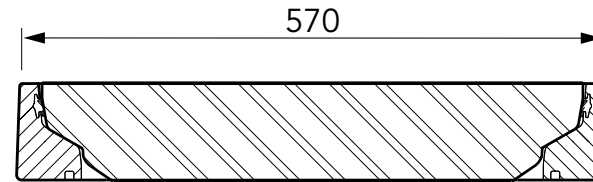


457mm square flat sealed composite cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

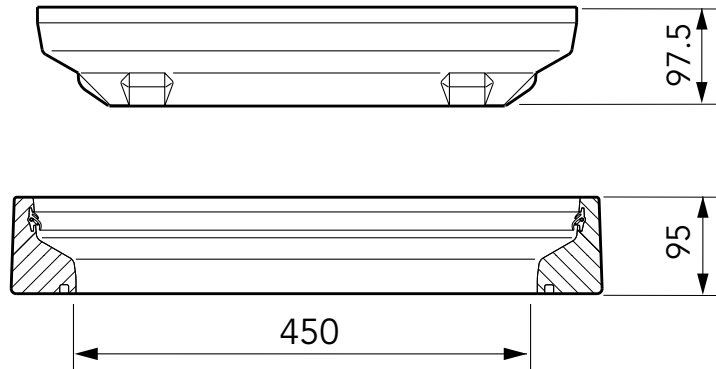

| Load Rating | Cover Weight | Frame Weight |
|-------------|--------------|--------------|
| C250        | 13 kg        | 8.5 kg       |

457mm square flat sealed composite cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




**CONCRETE**

**VERY IMPORTANT**

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

**VERY IMPORTANT**

The underside of the frame must be adequately supported by concrete.

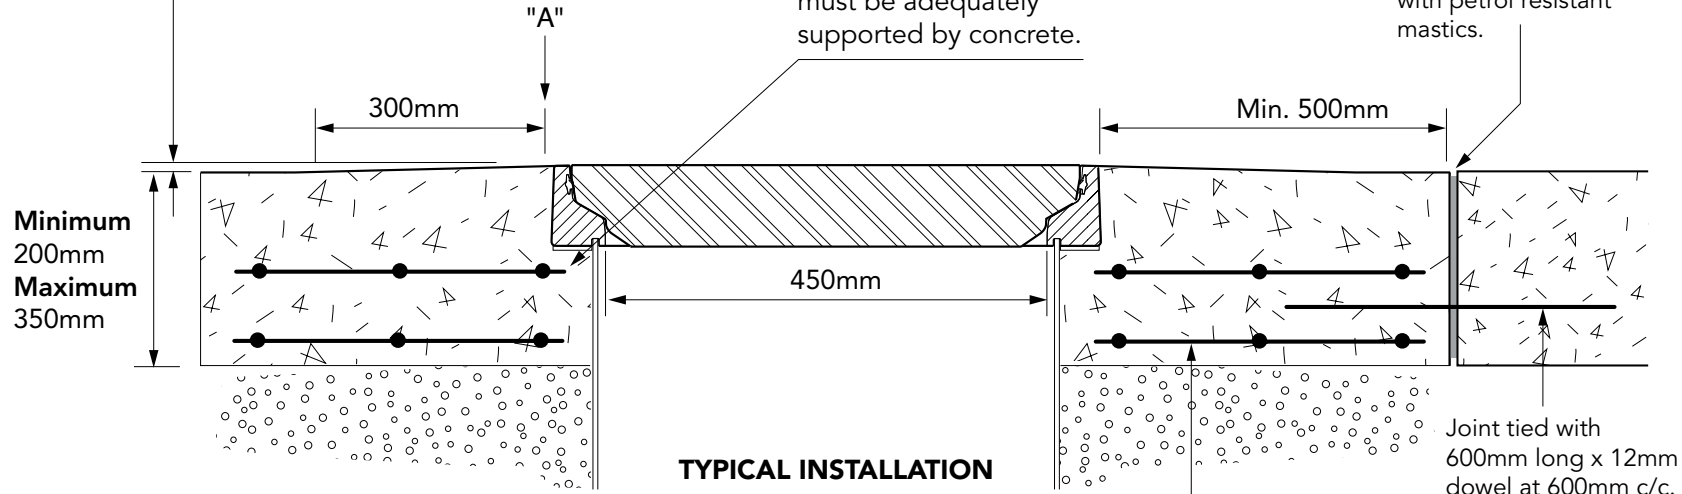

**TYPICAL INSTALLATION**


Concrete reinforced with 2 layers of reinforcement mesh.

Expansion joint filled with petrol resistant mastics.


Joint tied with 600mm long x 12mm dowel at 600mm c/c. Half bonded.



**TARMACADAM**

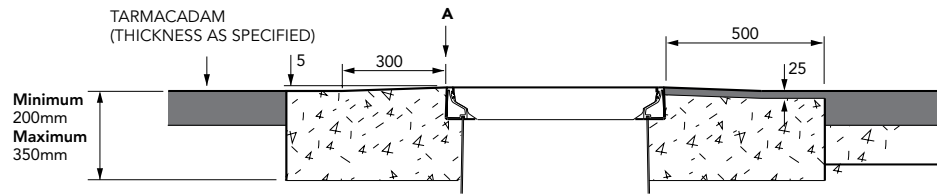

**SETTS**

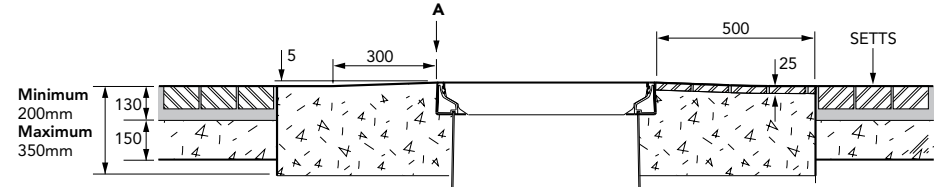

457mm square flat sealed composite cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

