

FL75 COVER




SEAL

FL75 FRAME

760mm diameter flat sealed composite cover and composite frame. Temperature and chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY

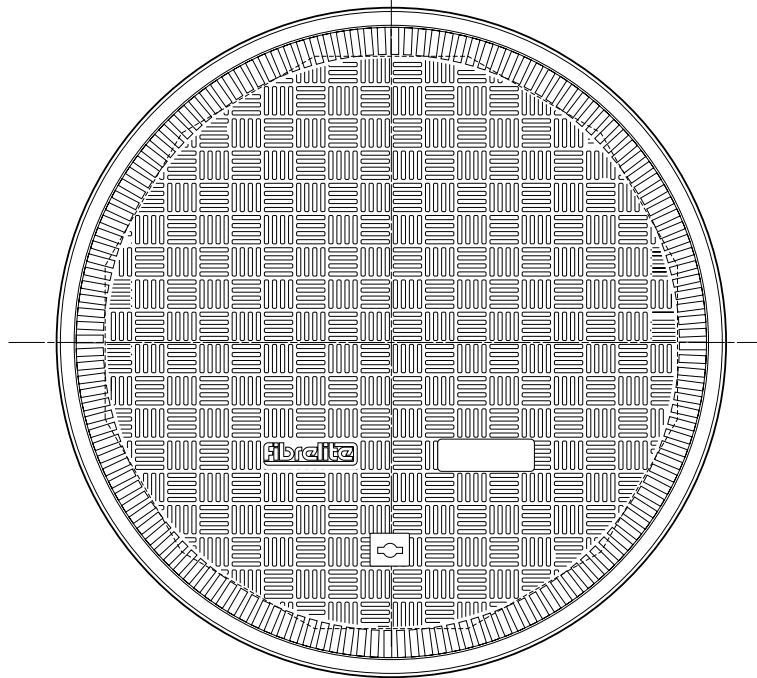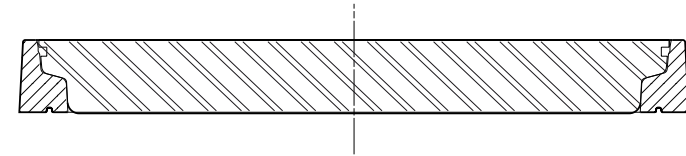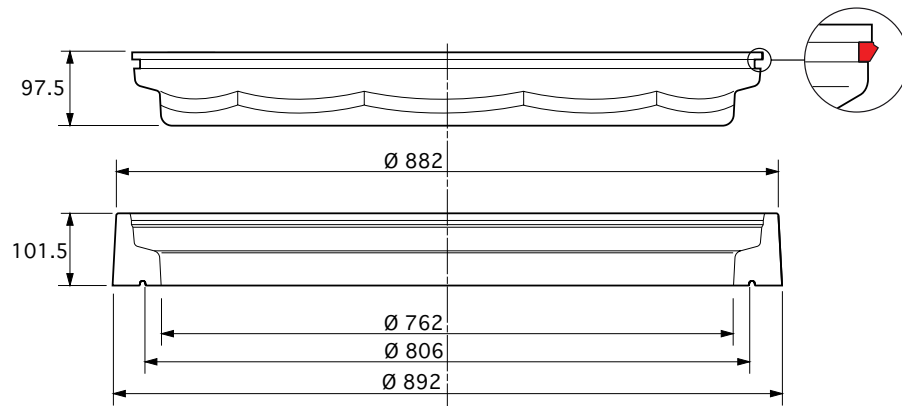

| Load Rating | Cover Weight | Frame Weight |
|-------------|--------------|--------------|
| B125 | -- | 8kg |
| C250 | 27kg | 8kg |
| D400 | 36kg | 8kg |

760mm diameter flat sealed composite cover and composite frame. Temperature and chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY


CONCRETE

VERY IMPORTANT


OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPORTANT


The underside of the frame must be adequately supported by concrete.

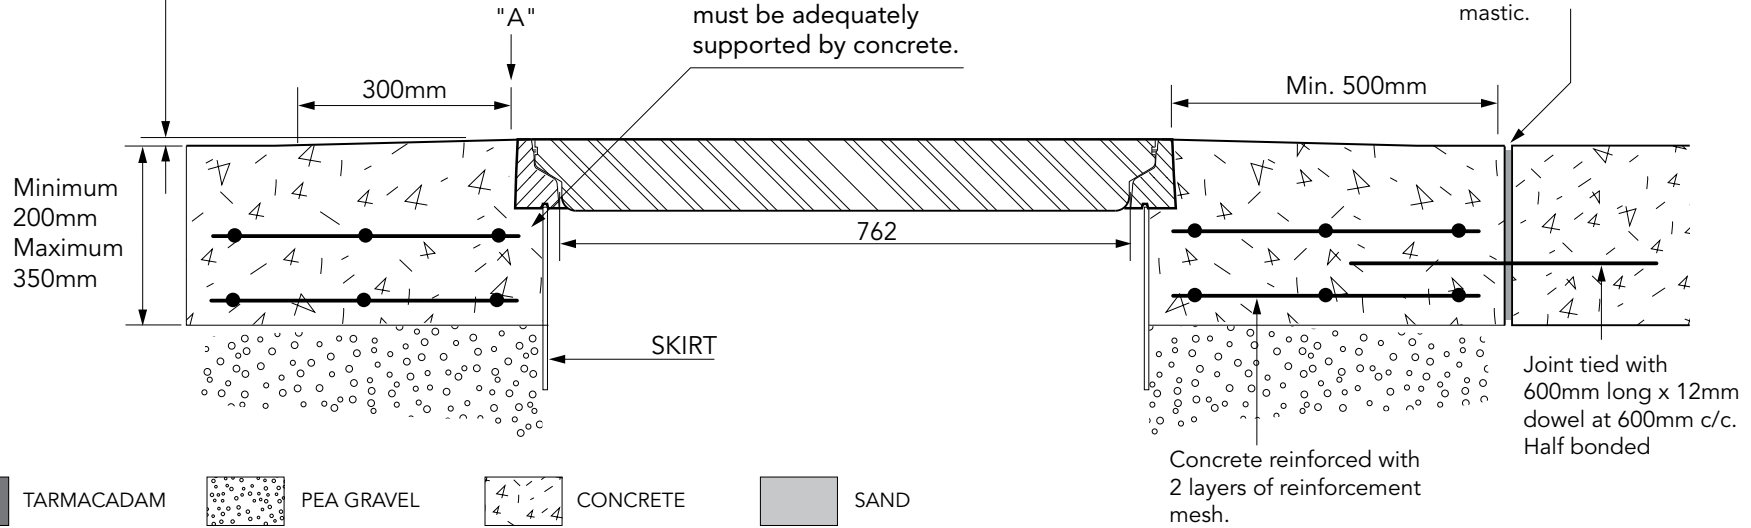

TARMACADAM

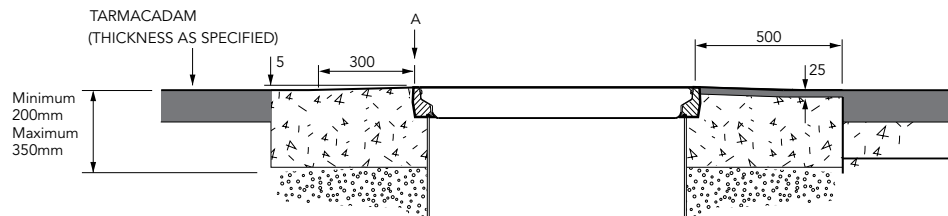

SETTS

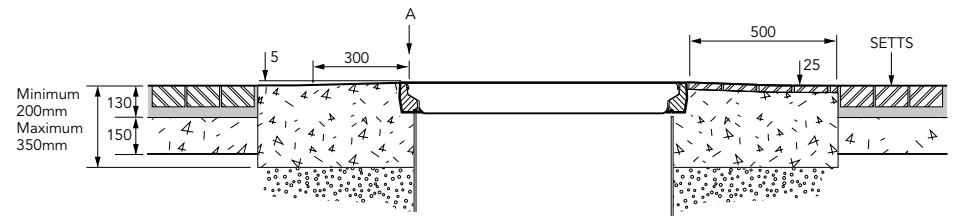

760mm diameter flat sealed composite cover and composite frame. Temperature and chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY