
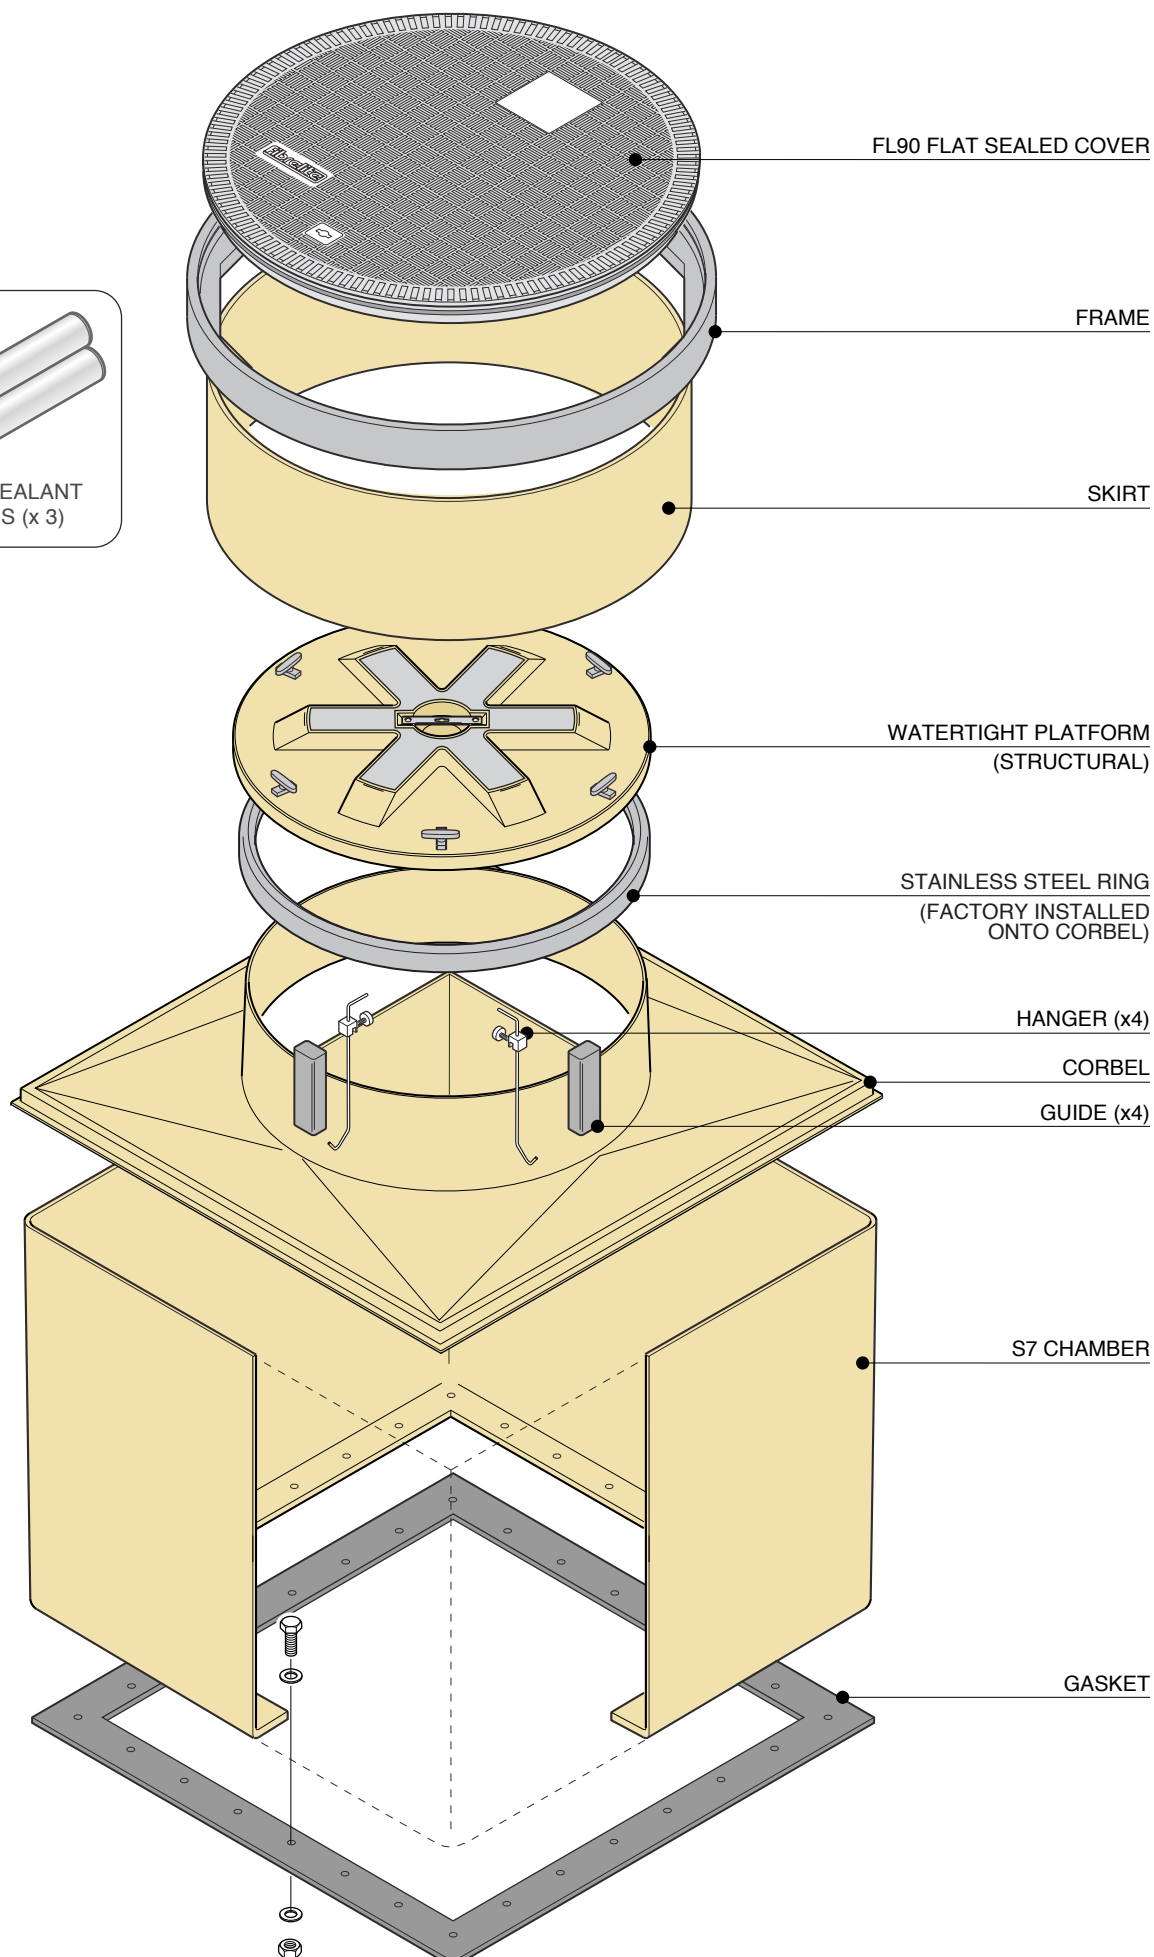


INSTALLATION INSTRUCTIONS

S7-390-WT Tank Sump Systems

FIBRELITE 
PART OF OPW A DOWDER COMPANY




INSTALLATION INSTRUCTIONS

(Manway Lid Fitting instructions)

FIBRELITE 


PART OF OPW A DOVER COMPANY

1

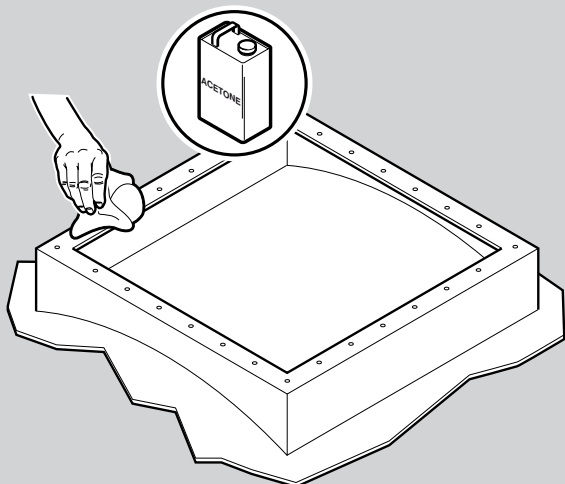

Clean the tank connection flange and ensure it is free of all grit etc. Check for flatness and deformation as this can cause the Chamber to become distorted or fail to seal. If in doubt contact our technical department + 44 (0)1756 799773




2

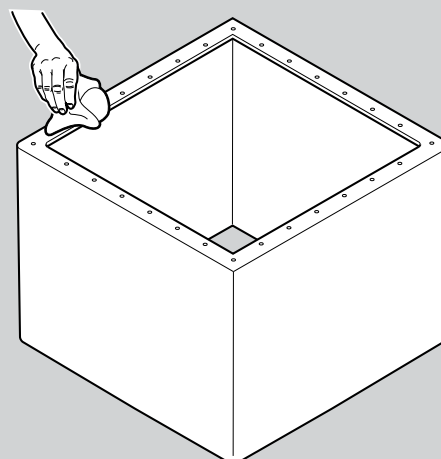

Remove protective cover from base of chamber and position chamber onto tank flange, aligning the holes.

Ensure the seal on the base of chamber is not damaged and is free from grit etc.

3

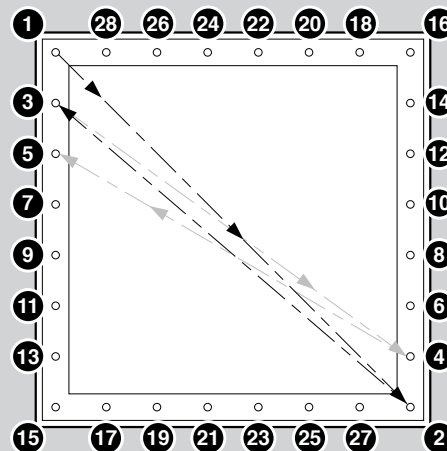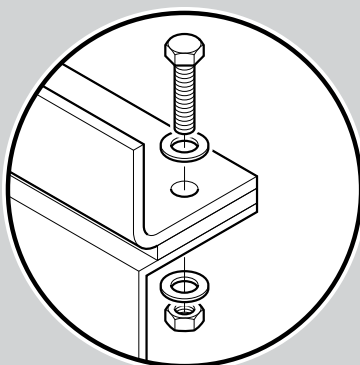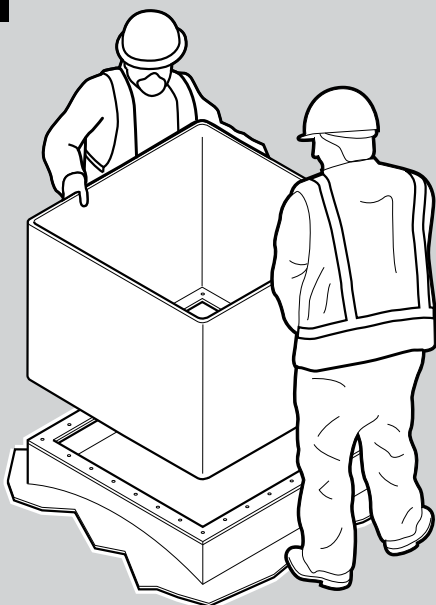

Fit a bolt and washer into each of the 28 holes (use only those supplied). Fit a washer and nut to each of the bolts. Tighten each bolt to 13.5Nm/10lbfft torque, employing the following method, to avoid distortion of chamber.

Starting with any bolt tighten to 7Nm/5lbfft torque. Move to the bolt positioned at 180° and tighten to 7Nm/5lbfft torque. Move 180° plus one bolt pitch and tighten to 7Nm/5lbfft of torque. Repeat until all bolts are tightened to 7Nm/5lbfft torque.

Now repeat the procedure tightening all bolts to 13.5Nm/10lbfft torque.


Note: The seal will initially relax and it is an advantage if each bolt is tighten to 13.5Nm/10lbfft torque after a period of 24 to 48 hours after initial assembly.

INSTALLATION INSTRUCTIONS


(Pipework and Entry Seal Kits)

FIBRELITE

PART OF OPW A DOWDER COMPANY



Drill
(150mm dia hole saw)



Jigsaw
+ Diamond tipped blades



Gloves




Safety Goggles





Face Mask


4



Position pipeway at 90° angles to the sump wall.




Ensure pipe entry boot is positioned away from the joints.



WARNING Care must be taken to position the pipework and conduit so it exits the sump at 90° angle to the sump wall, otherwise undue stress will be placed on the sump wall and entry boot, which may lead to leaks in the future.

5

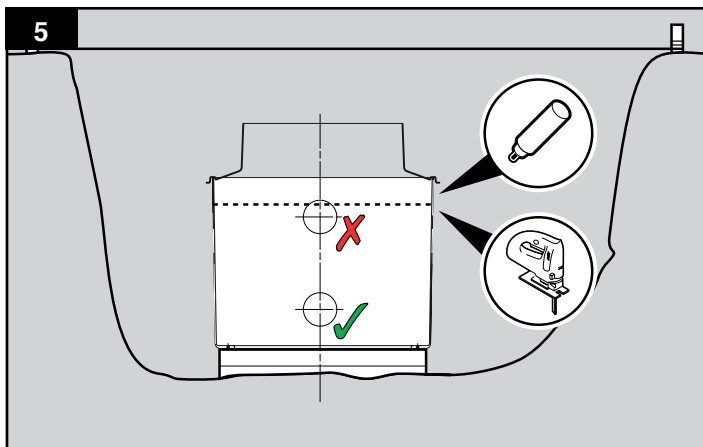

Before installing pipework, fix a string line at ground level across the sump to check if material needs to be cut off the sump. If so, mark the sump with a line along the cut mark.

Check to ensure you have the necessary minimum clearance required from the top of the sump to the centreline of the pipework/pipe entry kits.


Standard Entry Kit = 145mm

Large Entry Kit = 170mm

For shallow burials, it may be necessary to cut less material off the sump, and cut the remainder off the corbel and skirt to allow pipe entry boots to be fitted. **PLAN THIS CAREFULLY.**


Refer to measurement chart.

6a

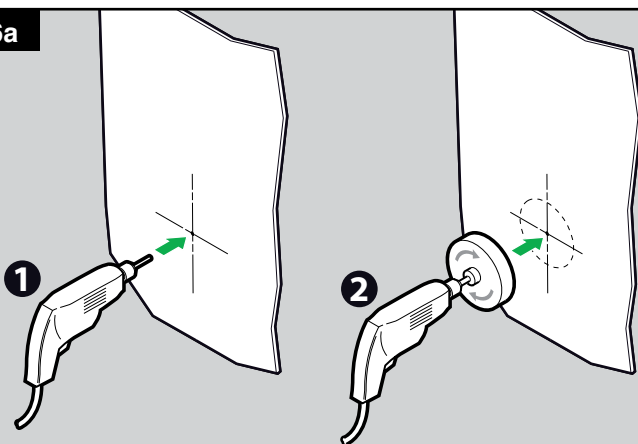

Mark a centre point in the centre of a sump panel. Drill a pilot hole to ensure the hole saw can be positioned and used safely.

6b

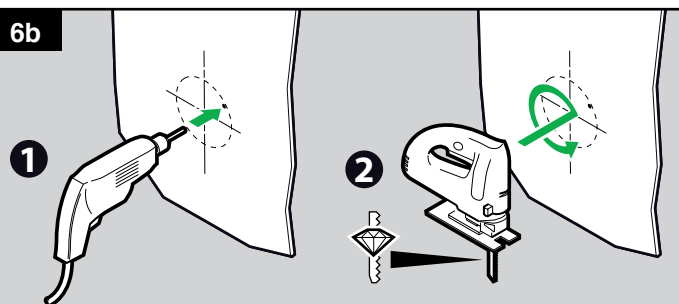

For larger holes (190mm) we recommend that the hole is marked and jigsaw is used to cut the hole. Drill a hole through the wall, so the jigsaw can be inserted and used easily and safely.

(Fibreglass will blunt normal blades very quickly, we recommend diamond tipped blades or blades to cut ceramics).

NOTE : When backfilling ensure the pipework is not disturbed.
WARNING : Do not backfill until the sump has been vacuum tested.

INSTALLATION INSTRUCTIONS


(Pipe Sealkit Fitting Instructions)

FIBRELITE 
PART OF OPW A DOVER COMPANY

7a


NB: Where appropriate, it is recommended that a drill piloted hole saw be used to cut the pipe/cable seal entry hole in the chamber.

Angles of flexible entry sleeves must not exceed 12° from centre line (24° inclusive angle).

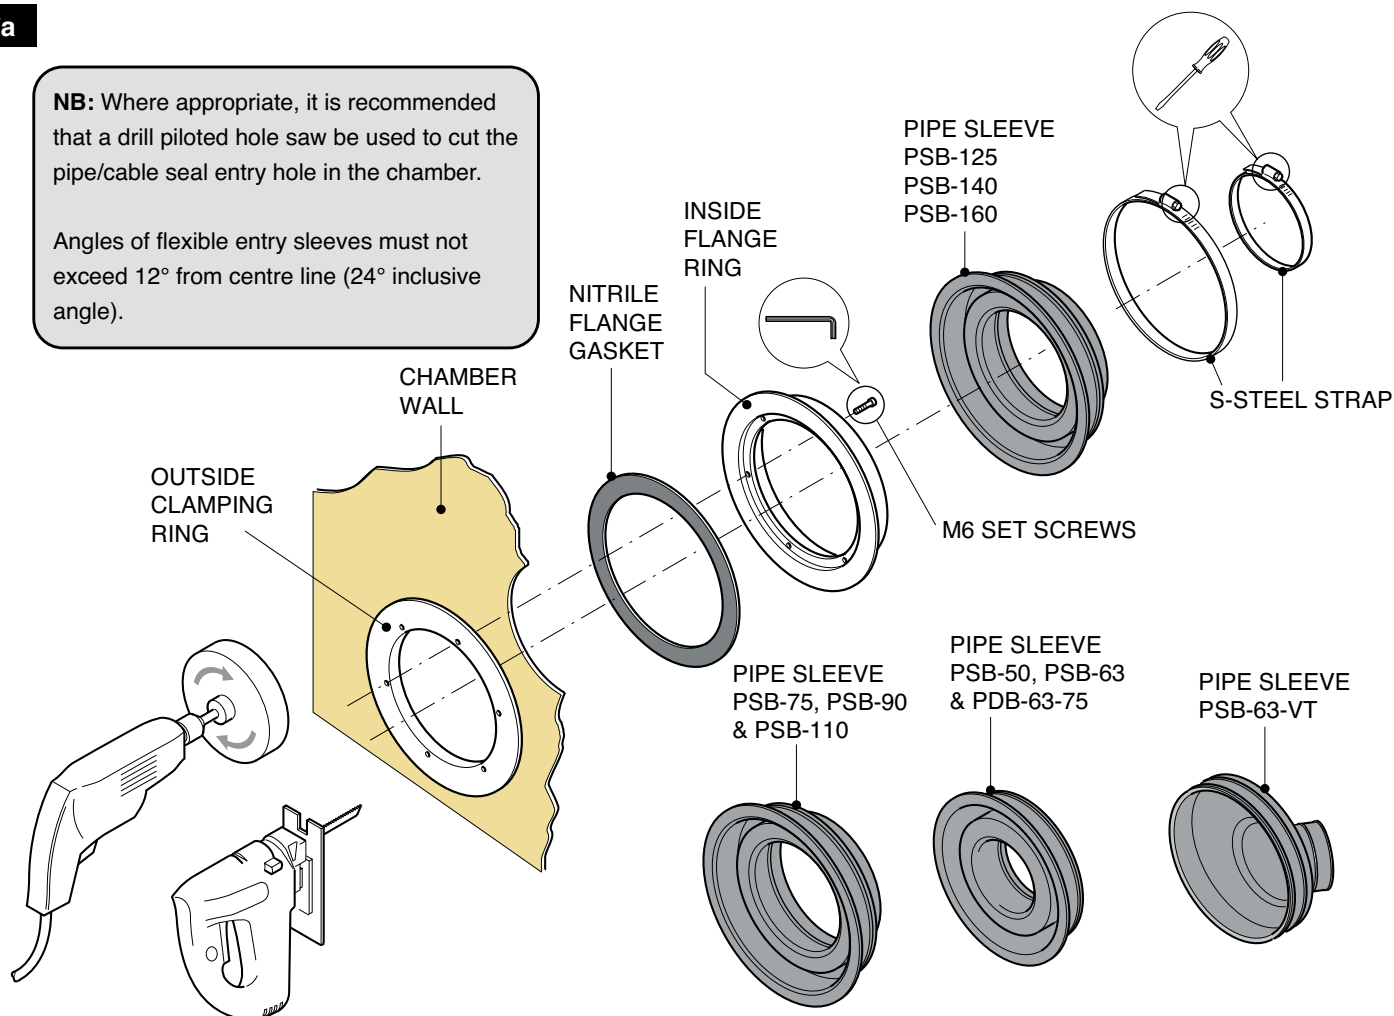

DRILL AND HOLE SAW
ATTACHMENT OR JIGSAW

NB: Straps/clips are to be tightened in accordance with the pipe manufacturers recommendation

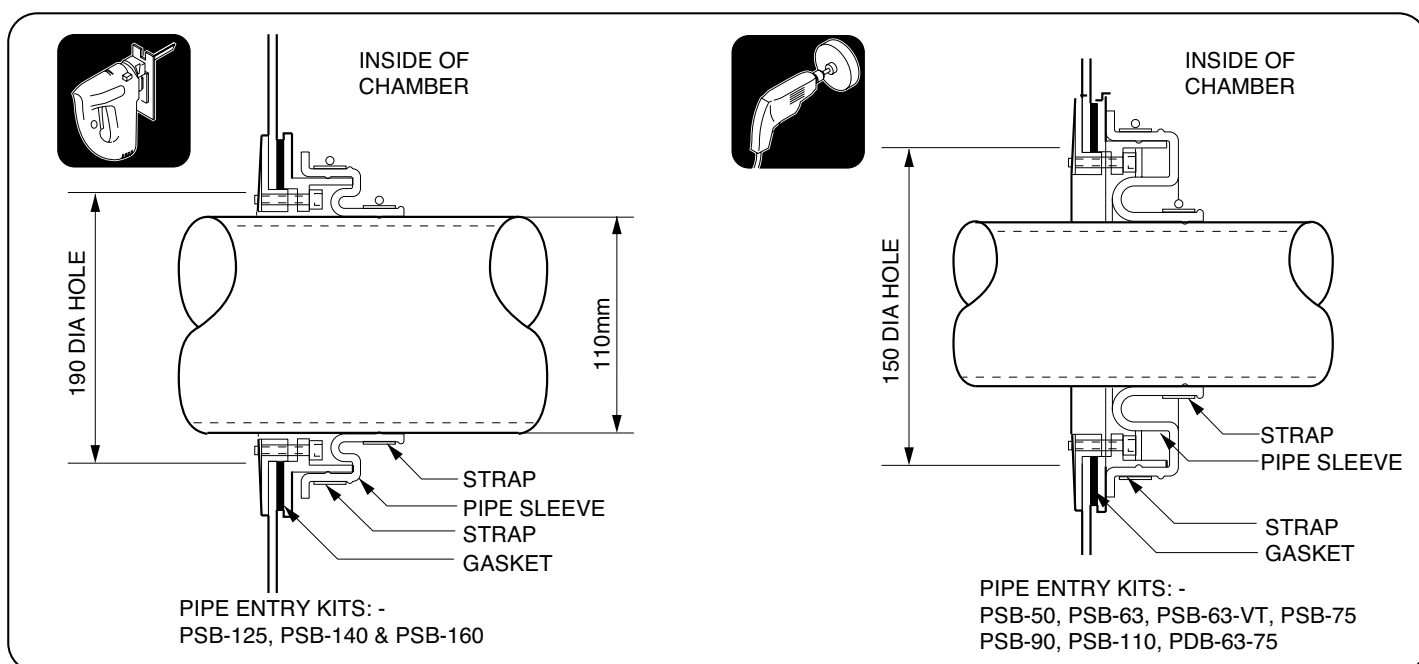


The exit position of the pipework through the chamber wall must be as close as possible to 90°. The pipe kit should be fitted so that the pipework is centrally positioned to the seal. When backfilling ensure that the pipework is not disturbed from this central position.

INSTALLATION INSTRUCTIONS

(Conduit Entry Seal Kit Installation Guide)


FIBRELITE 
PART OF OPW A DOVER COMPANY

7b

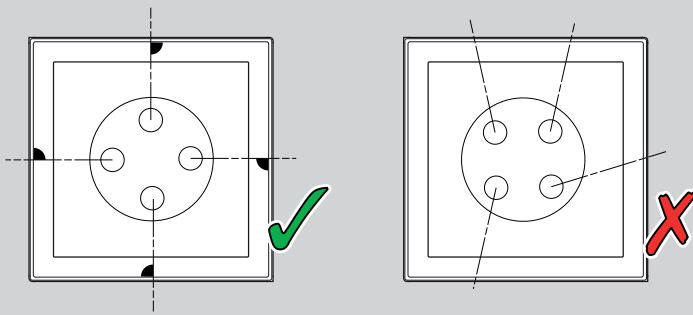

PCE-1-KIT

Conduit must be installed at 90° angle to the side wall.

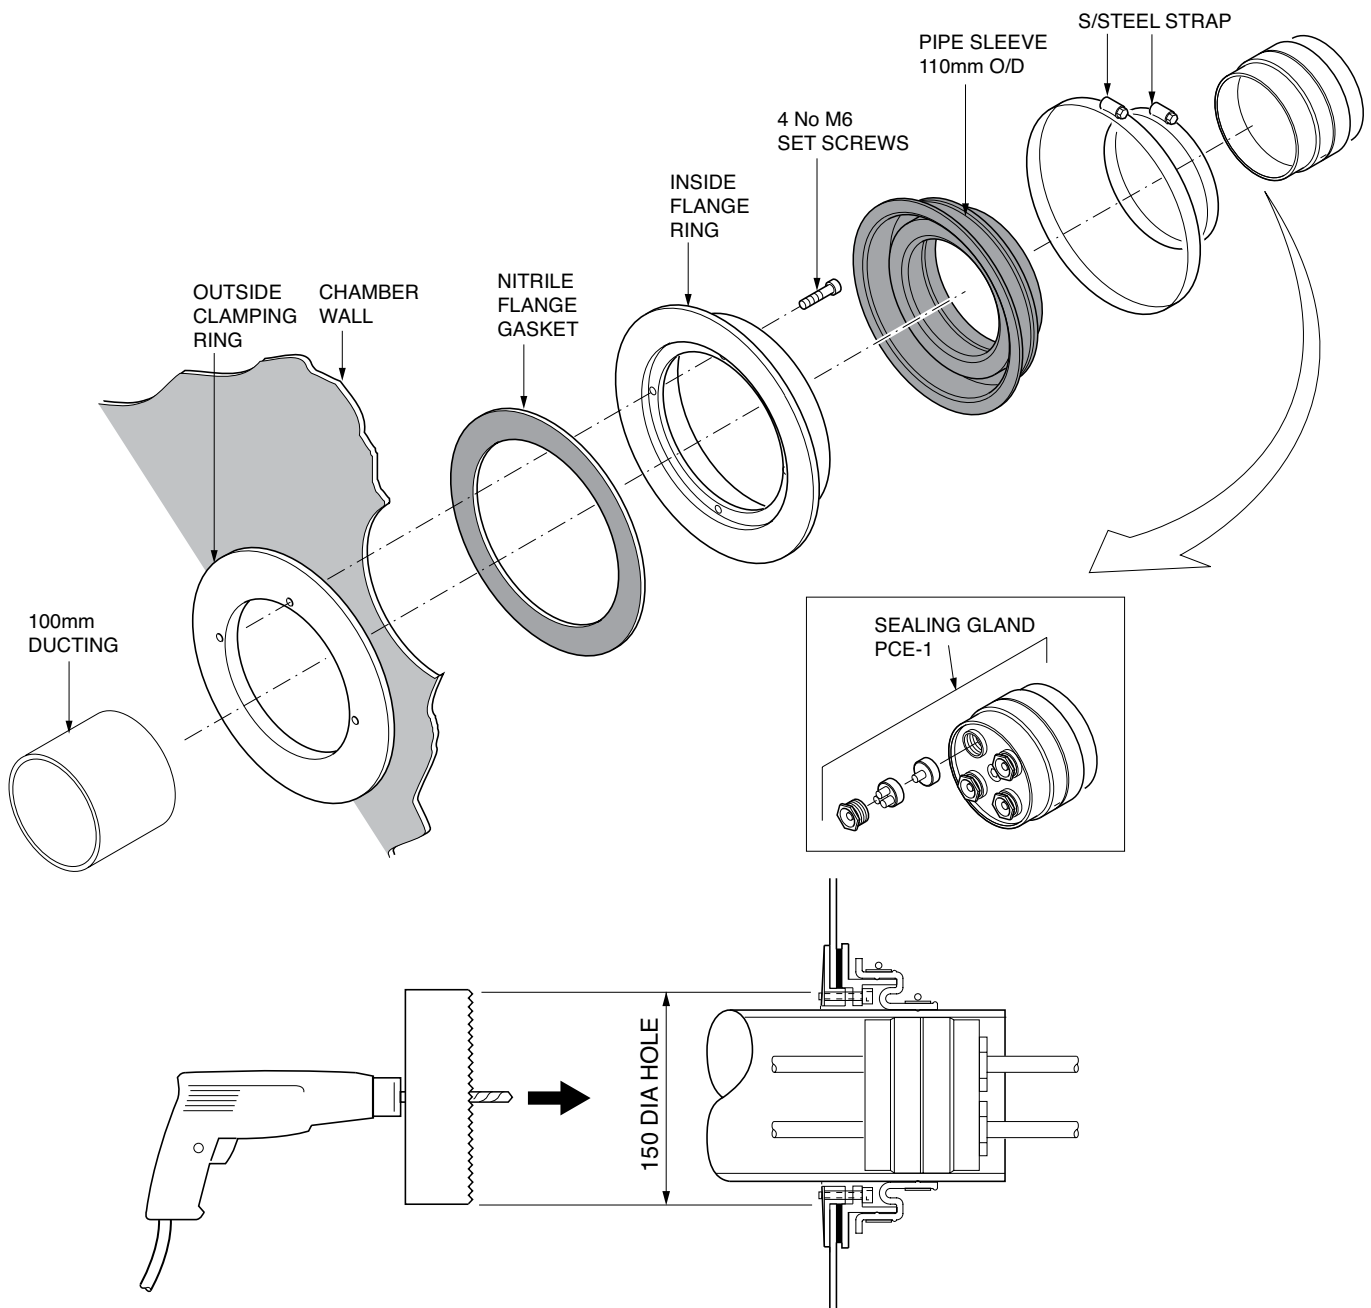


NB: Use the correct size drill piloted hole saw for each entry kit. The cable entry seal must be fitted perpendicular to the chamber wall and the conduit must enter the entry kit perfectly aligned. When backfilling ensure the conduit is not disturbed.

INSTALLATION INSTRUCTIONS

(Conduit Entry Seal Kit Installation Guide)

7c

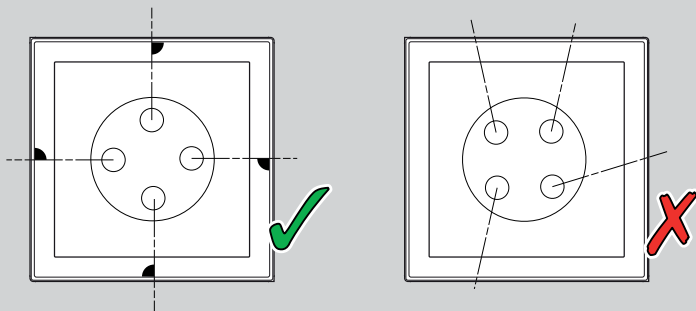


PEC KITS

Refer to pipe entry boot instructions on positioning of the hole.

Conduit must be installed at 90° angle to the side wall.

Use Fibrelite entry seal kit model PEC-32 to fit UPP + NUPI 32mm conduit.

PEC-27, PEC-33, PEC-50 to fit metal conduit sizes 3/4", 1" and 1 1/2" respectively.

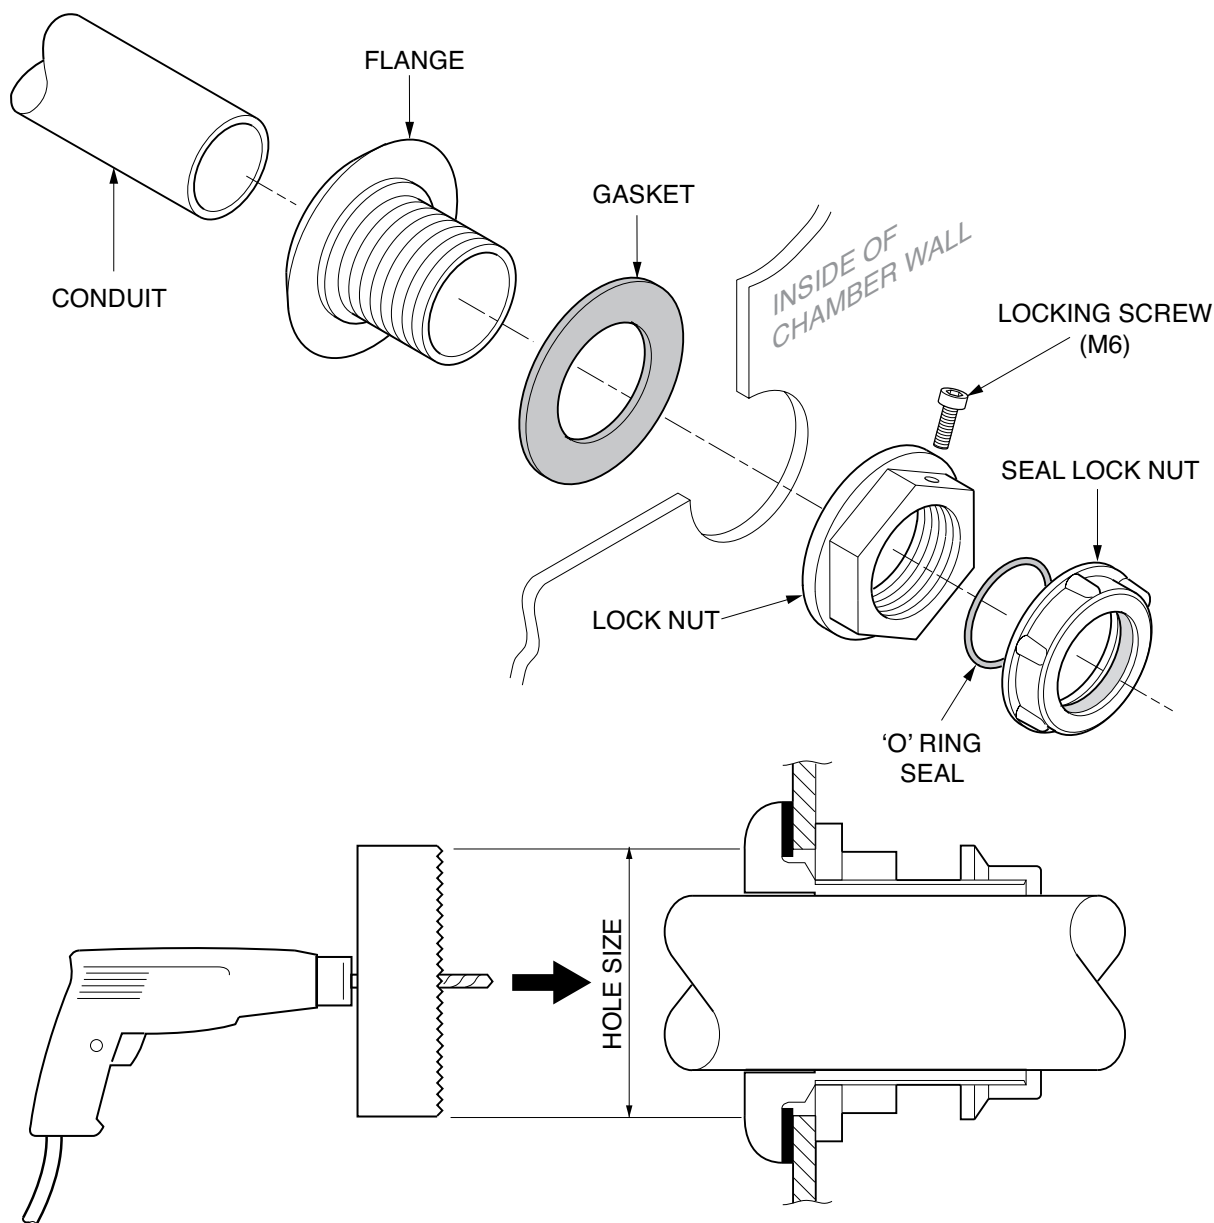

NB: Use the correct size drill piloted hole saw for each entry kit. The cable entry seal must be fitted perpendicular to the chamber wall and the conduit must enter the entry kit perfectly aligned. When backfilling ensure the conduit is not disturbed.

ENTRY KIT	HOLE SIZE
PEC-27	Ø51mm
PEC-32	Ø51mm
PEC-33	Ø60mm
PEC-50	Ø73mm


INSTALLATION INSTRUCTIONS

(Sump Vacuum Test)

FIBRELITE

PART OF OPW A DOVER COMPANY

8

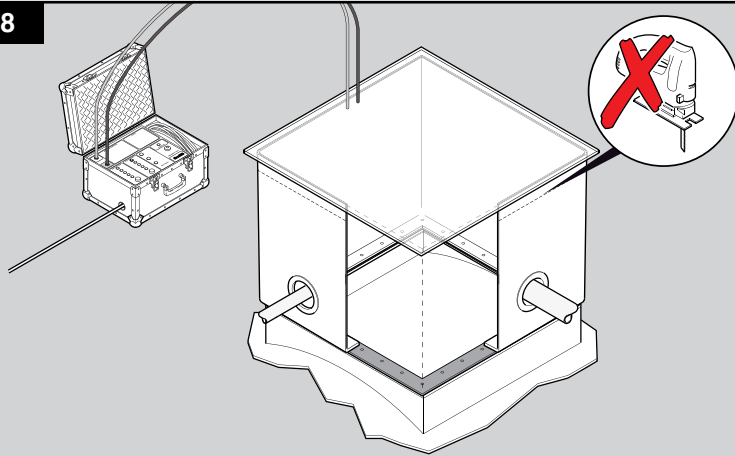


After penetrations have been fitted, ensure all connections on the manway lid are sealed.

Refer to Vacuum test instructions and perform a vacuum test.

Do not backfill around sump or cut material off the sump until the test has passed successfully.


Note: Sump to be tested to a depth setting of 1.2 meters/12 kPa.

9

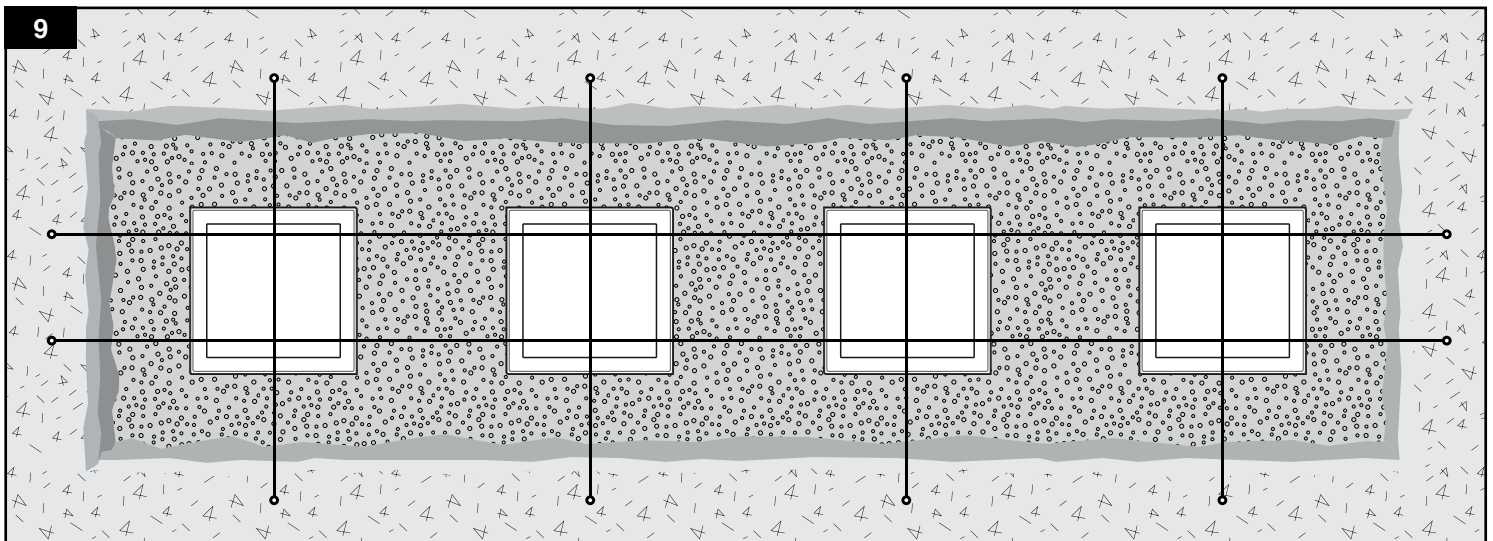

Fix string lines 10mm above grade level across the sump lengths and widths of the tank farm to highlight any falls.

10

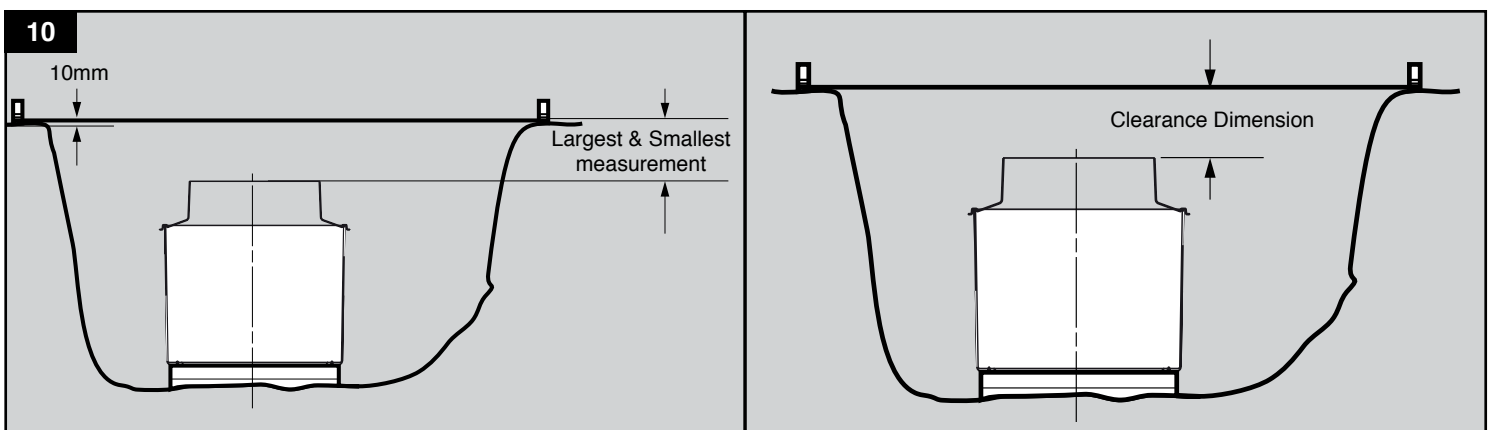


Place the corbel onto the sump (only 'dry fit' the corbel do not bond at this stage). Check the measurement from the top of the corbel to the string line, which is set 10mm above the general grade level. Check all sides of the sump and select the largest and smallest measurement to take account of falls across the forecourt.

INSTALLATION INSTRUCTIONS
(Achieving the Correct Height)

Round Cover Systems

11

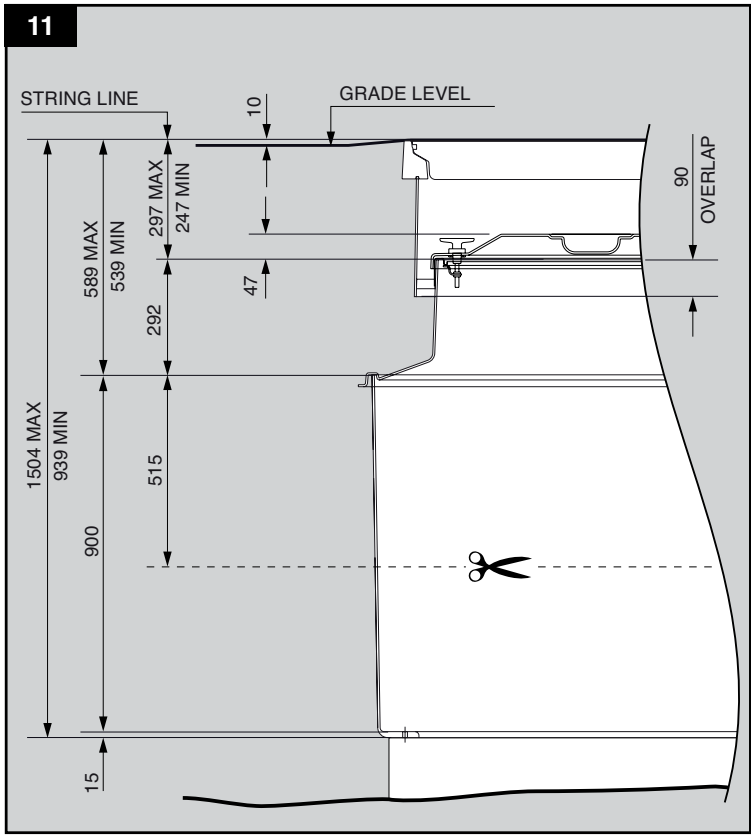

Measurement (clearance dimension)	Action
Max. 297mm Min. 247mm	No trimming required, corbel can be bonded onto the sump. Adjust frame height using hangers.
less than 225mm	Trim material from chamber until clearance dimension falls within the range 297 to 247mm. NB:- The maximum amount of material that can be removed from the chamber is 515mm.
more than 297mm	The burial depth of the tank is greater than the maximum burial depth of the standard system. Bond a 300mm extension onto the sump. Then proceed as above.


See next page for extension bonding instructions

INSTALLATION INSTRUCTIONS

(Optional Extension Bonding)


FIBRELITE 
PART OF OPW A DOW COMPANY

12

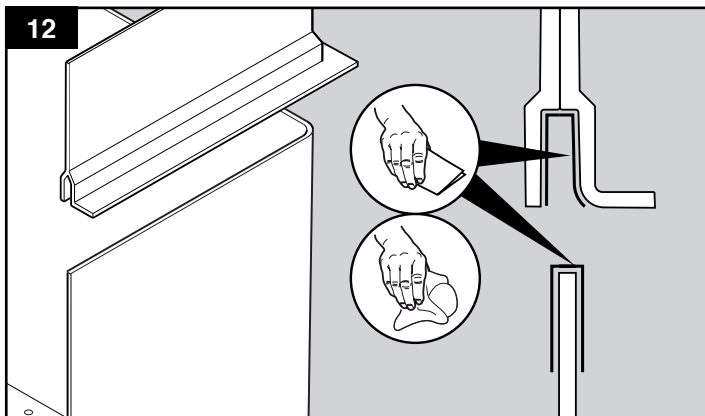


Abrade and wipe with a degreasing solvent the chamber top edge / wall and the extension recess shoulder

13

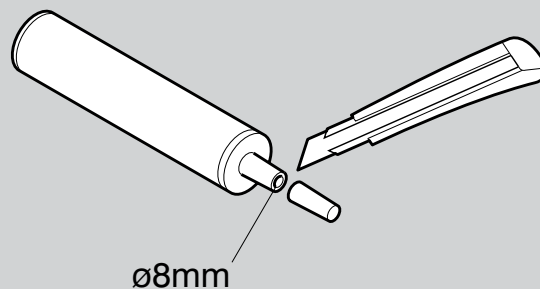

Cut nozzle of the adhesive sealant tube to approx. Ø8mm.


14

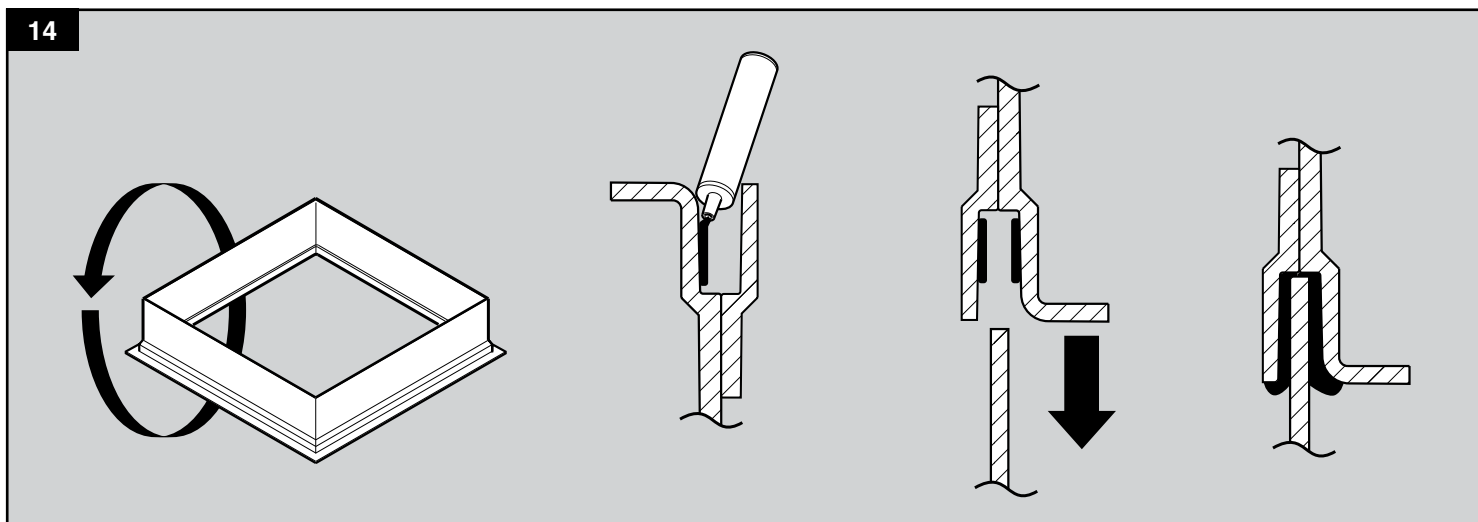

To permanently fix the extension, invert the extension and apply a bead of adhesive sealant to the vertical wall of the extension recess.

Position the extension(s) onto the sump, ensure the extension is horizontal and press down uniformly.

15

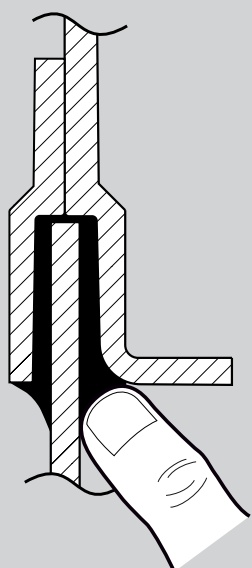

Apply a fillet of adhesive sealant (same nozzle size) to the external horizontal joint and smooth off.


INSTALLATION INSTRUCTIONS

(Bonding the Corbel)

FIBRELITE


PART OF OPW A DOWDER COMPANY

16

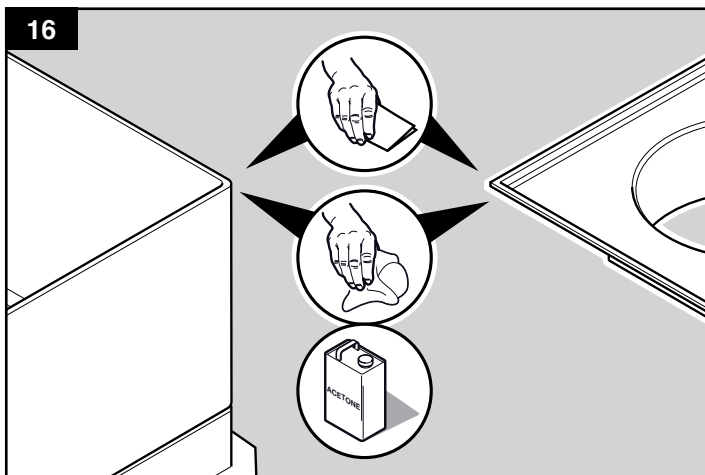


Abrade and wipe with a degreasing solvent the sump or extension top edge/wall and the corbel groove.

17

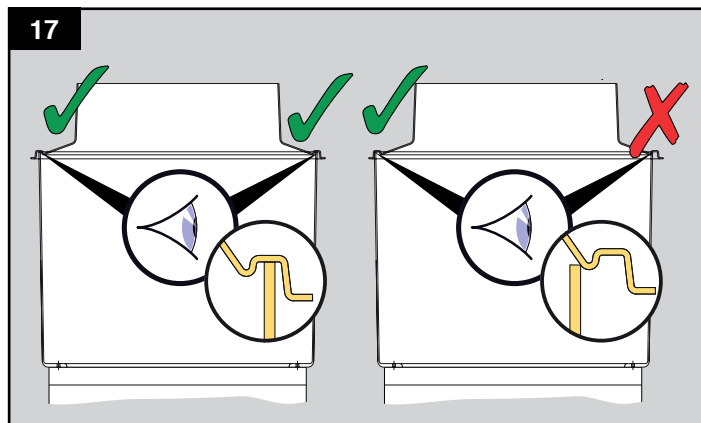

Dry fit the corbel on the sump to ensure it fits - push corbel groove onto sump wall. If it does not fit, pipework may have distorted the sump wall shape.

18

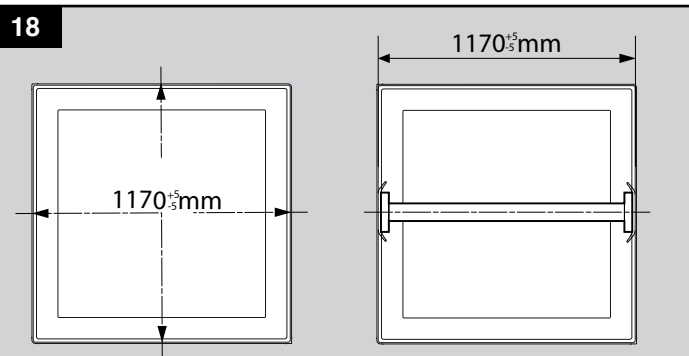


Measure distance between opposite walls, this should be 1170mm. If less than this you will need to brace out the sump.

Using wooden batons (1170 \pm 5mm long) with timber spreader plates (150 x 150) to spread the load, brace out the sump to the correct size.


Repeat this process on all walls to get the correct shape.

19

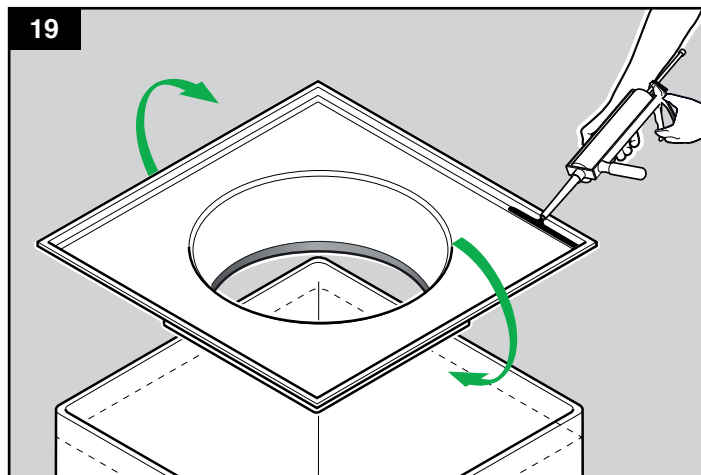

Apply 2 tubes of Soudaflex 40FC sealant in the groove of the corbel. Sealant should fill 1/2 the groove.


21

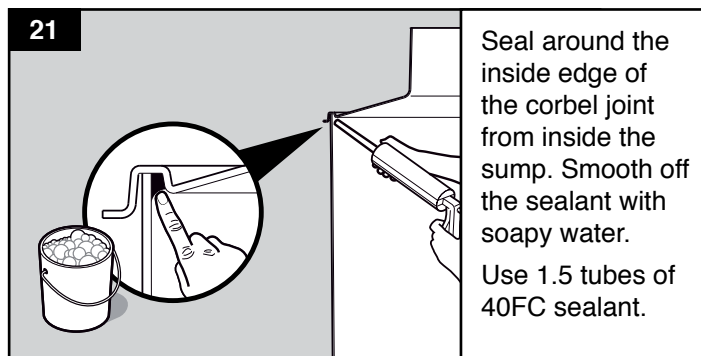

Seal around the inside edge of the corbel joint from inside the sump. Smooth off the sealant with soapy water.


Use 1.5 tubes of 40FC sealant.

20

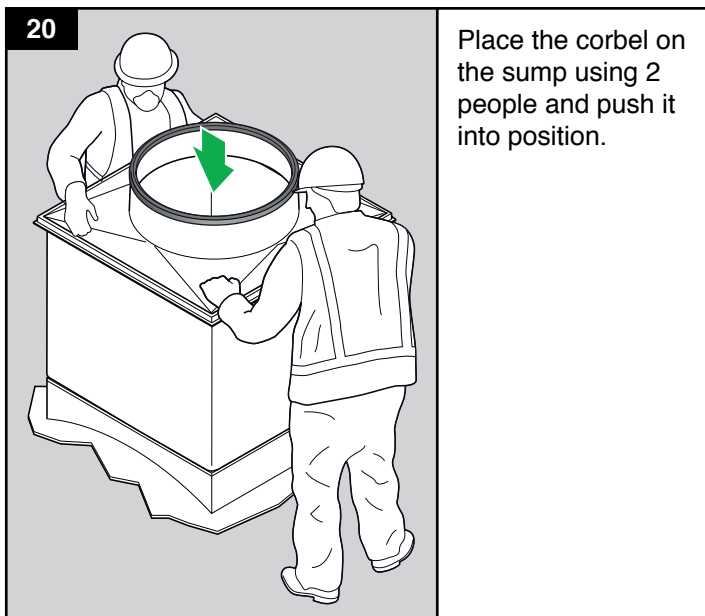

Place the corbel on the sump using 2 people and push it into position.

22

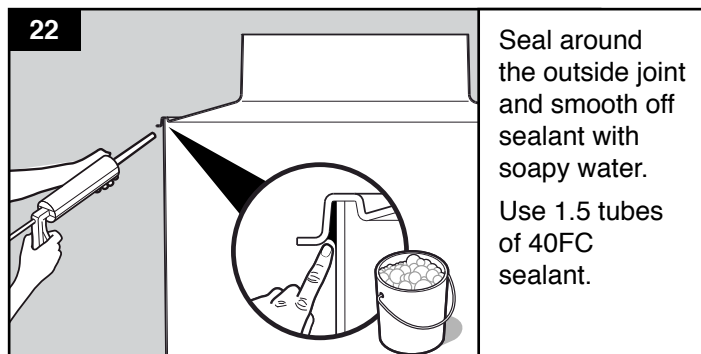

Seal around the outside joint and smooth off sealant with soapy water.


Use 1.5 tubes of 40FC sealant.

INSTALLATION INSTRUCTIONS

(Performing Corbel Vacuum Test)


FIBRELITE 
PART OF OPW A DOVER COMPANY

23

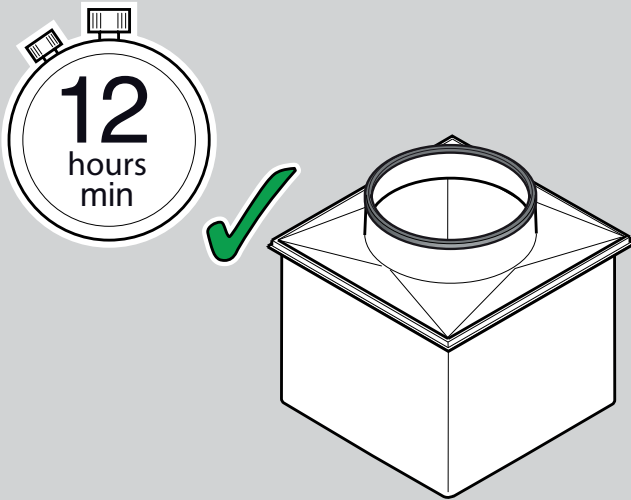

Wait a min of 12 hours before vac testing, preferably overnight to allow sealant to set before vacuum testing.
Do not disturb the sump during this time.

24

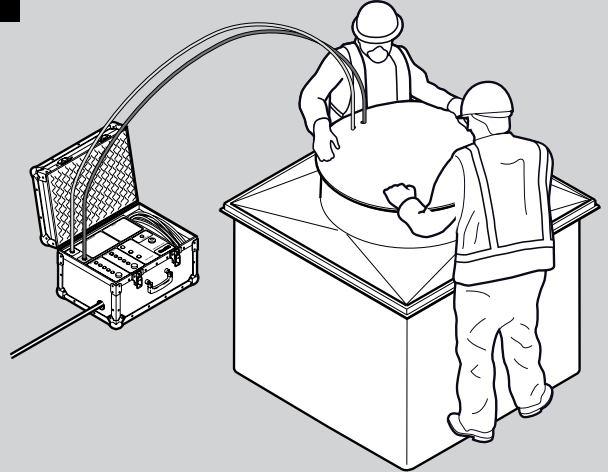

Ensure all pipework and electrical entries have been completed before vacuum testing, this is a final test for all penetrations in the sump.


Warning: Test the corbel at a 0.6m depth setting only or irreparable damage may occur.

Refer to vacuum testing instructions for correct method.

INSTALLATION INSTRUCTIONS

(Installing Watertight Platforms)


25

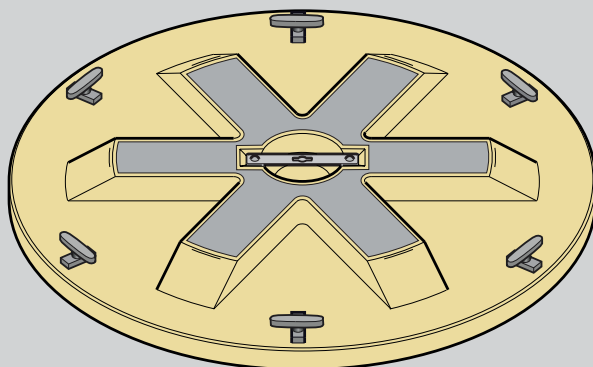


Installation of Watertight Platforms:

Once the sumps are properly installed and tested, the watertight platforms should be installed to ensure that the platforms fit properly onto the stainless steel retaining rings.

26

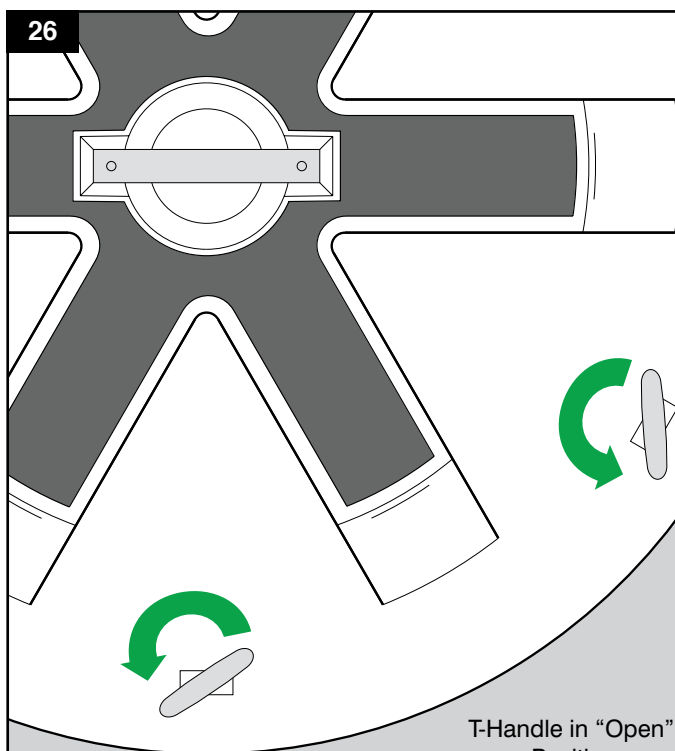


Cam-lock Latch in "Open" Position



Turn all T-handles on the top of the platform fully counterclockwise to the open position – the cam-lock latches on the underside should be 90 degrees opposed from the edge of the platform.

27

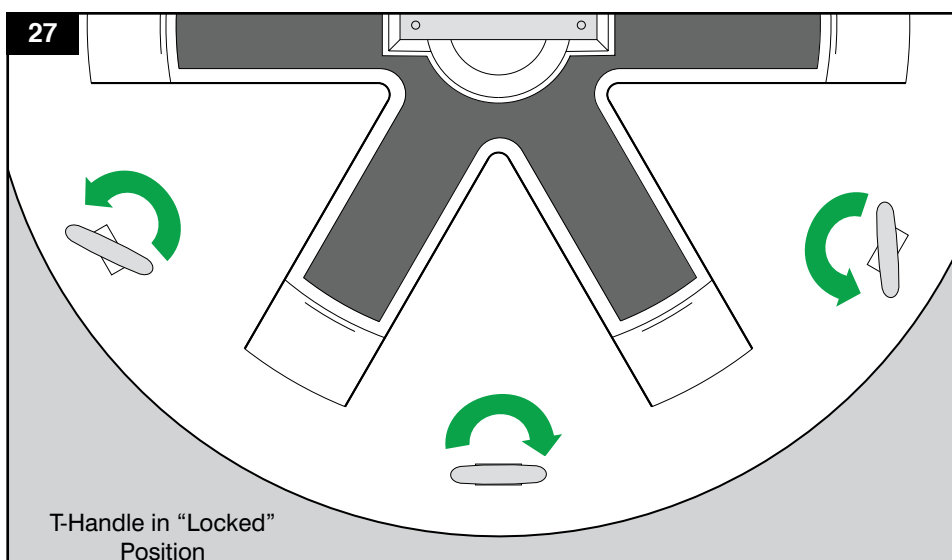

Seat the watertight platform on the stainless steel ring. Turn the T-handles fully clockwise to lock the latch beneath the stainless steel ring (T-handle should be as shown).


When turning T-handle into locked position the cam-lock should compress very tightly. It may be necessary to adjust the cam-lock latch. See next page for instructions.

When it is confirmed that the platform seats correctly, removed it for final vacuum testing.

INSTALLATION INSTRUCTIONS


(Adjusting the Cam-lock Height)

28

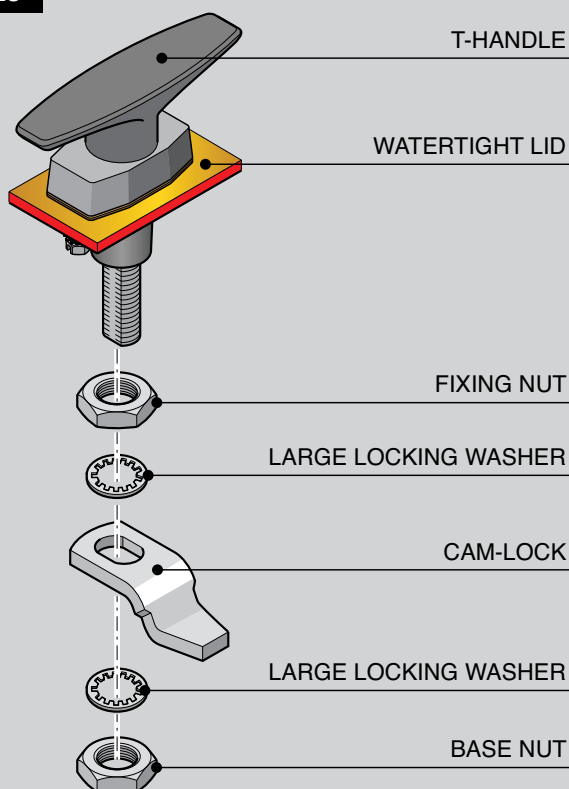

The T-handle mechanism consists of the above items.


29

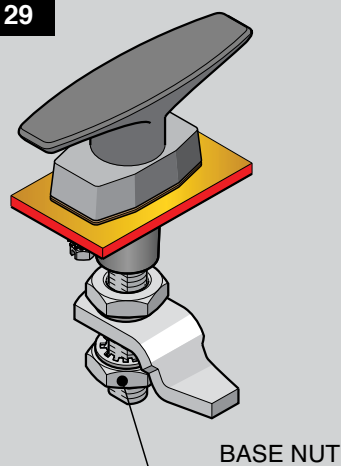

If the T-handle is not fully engaging it means the cam-lock needs to be lowered. Loosen the base nut to a lower position and go to step 30a.


If the platform is not compressing the gasket tightly against the stainless steel ring it means the cam-lock needs to be raised. Loosen the base nut and go to step 30b.

30a

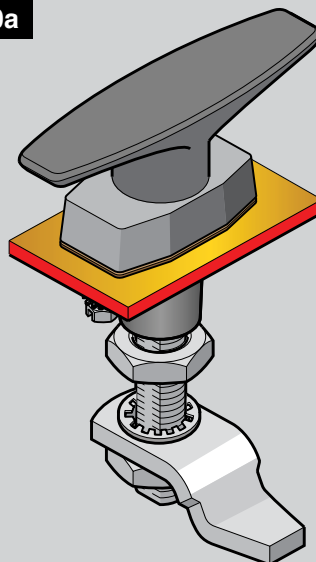

Pull the cam-lock down to rest onto the base nut. Lower and tighten the fixing nut until the cam-lock is secure as per step 31.


31

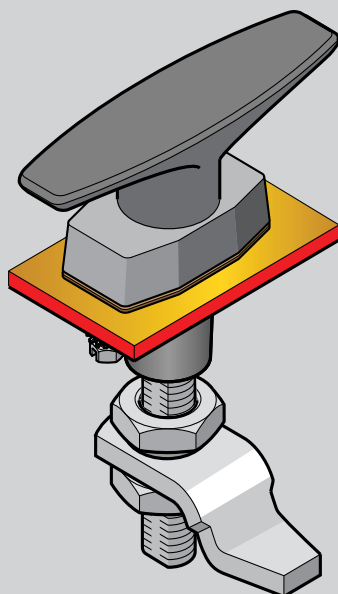

Once the cam-lock is secure refit the watertight spill platform as per the steps on the previous page.


Note: It may be necessary to further adjust the cam-lock height until the optimal position is located.

30b

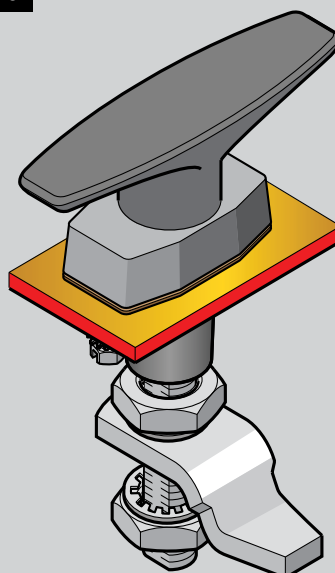

Pull the cam-lock down to rest onto the base nut and raise the fixing nut. Push the cam-lock up to the fixing nut and tighten the base nut until the cam-lock is secure as per step 31.


32

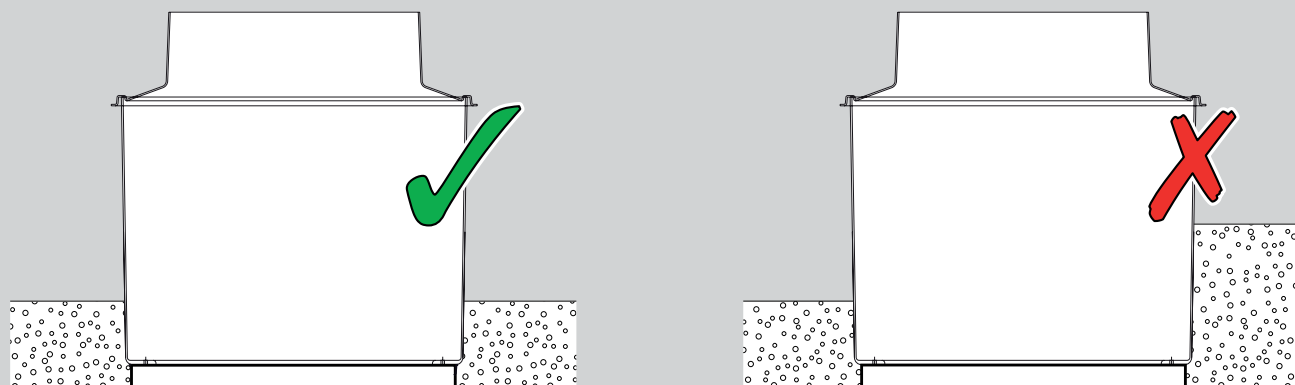

Once the corbel test has been performed with a PASS result, the area around the sump can be carefully backfilled with peagravel or sand. Back-fill equally around the sump in layers to prevent damage or deformation.


(Adjusting the Skirt & Frame to Grade Level)

33

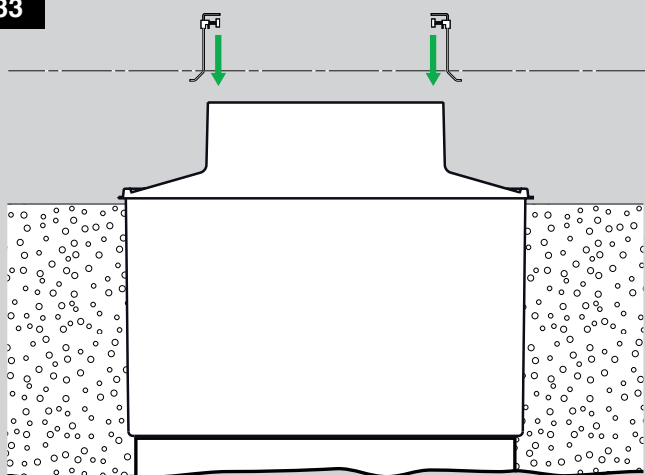

Fix a string line 10mm above grade level across the sump, fix 4 hangers on the corbel top with base support facing out.


34

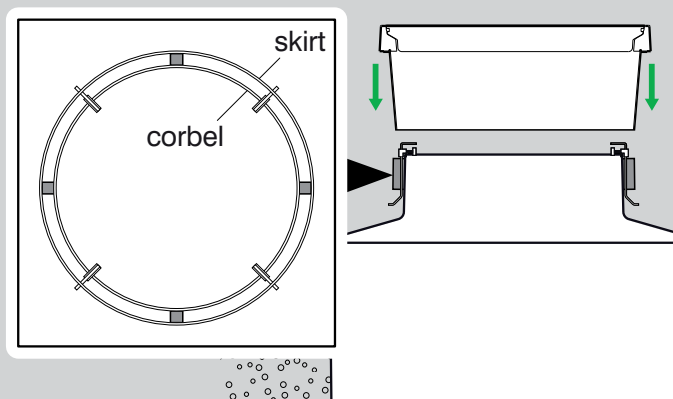

Put the skirt and frame on the hangers.

Locate the 4 foam blocks supplied between the skirt and corbel turret to centralise the skirt about the corbel. Failure to do this may result in the platform fouling.

35

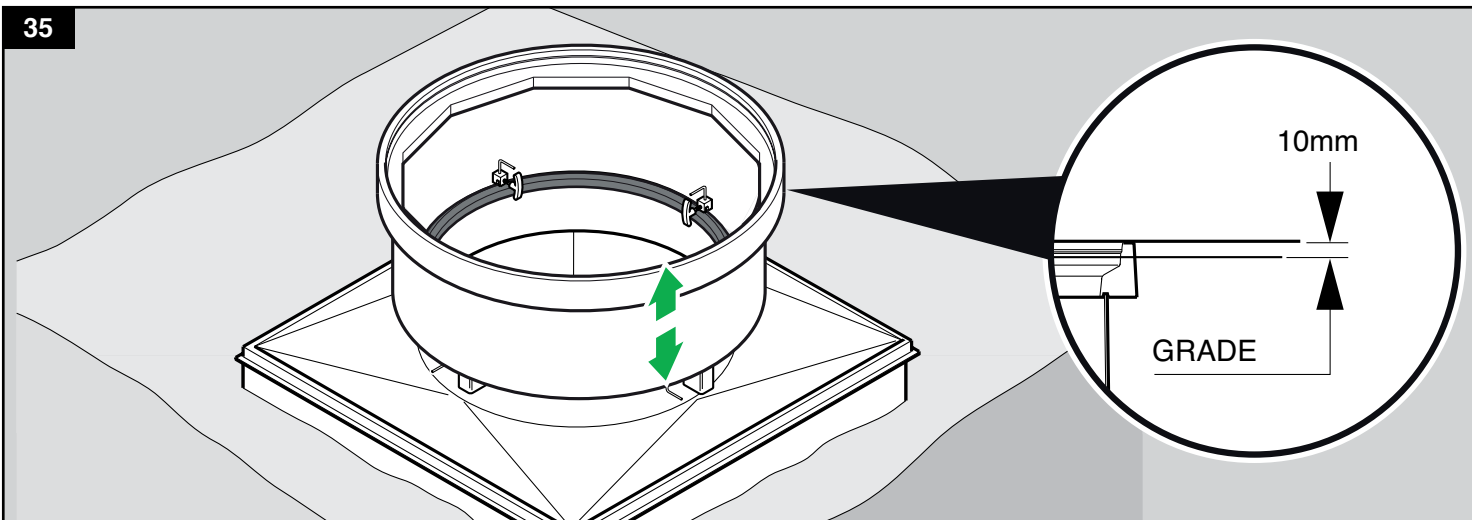


Adjust knobs to set the frame to stringline level, adjust for fall in grade. Set the frame 10mm above grade level.

INSTALLATION INSTRUCTIONS

(Concreting)

FIBRELITE 
PART OF OPW A DOVER COMPANY

36

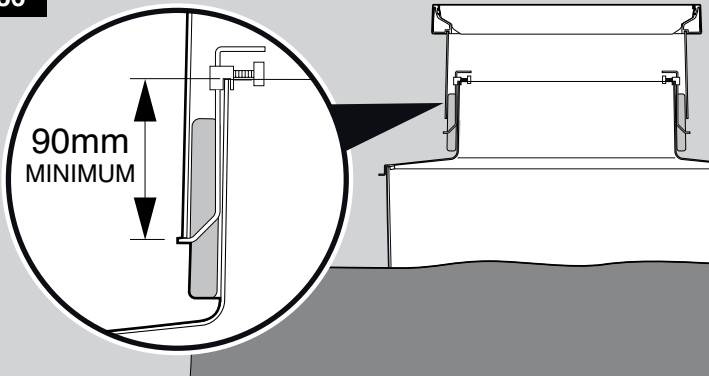


Ensure the void between corbel and skirt is kept free from concrete and a depth of 90mm overlap minimum is maintained, (120mm on high water table installations).

Ensure foam spacers are in position to locate the skirt centrally around the corbel.

37

! VERY IMPORTANT !
OUTER EDGE "A" OF FRAME SET 5 - 10MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM.


TYPICAL INSTALLATION

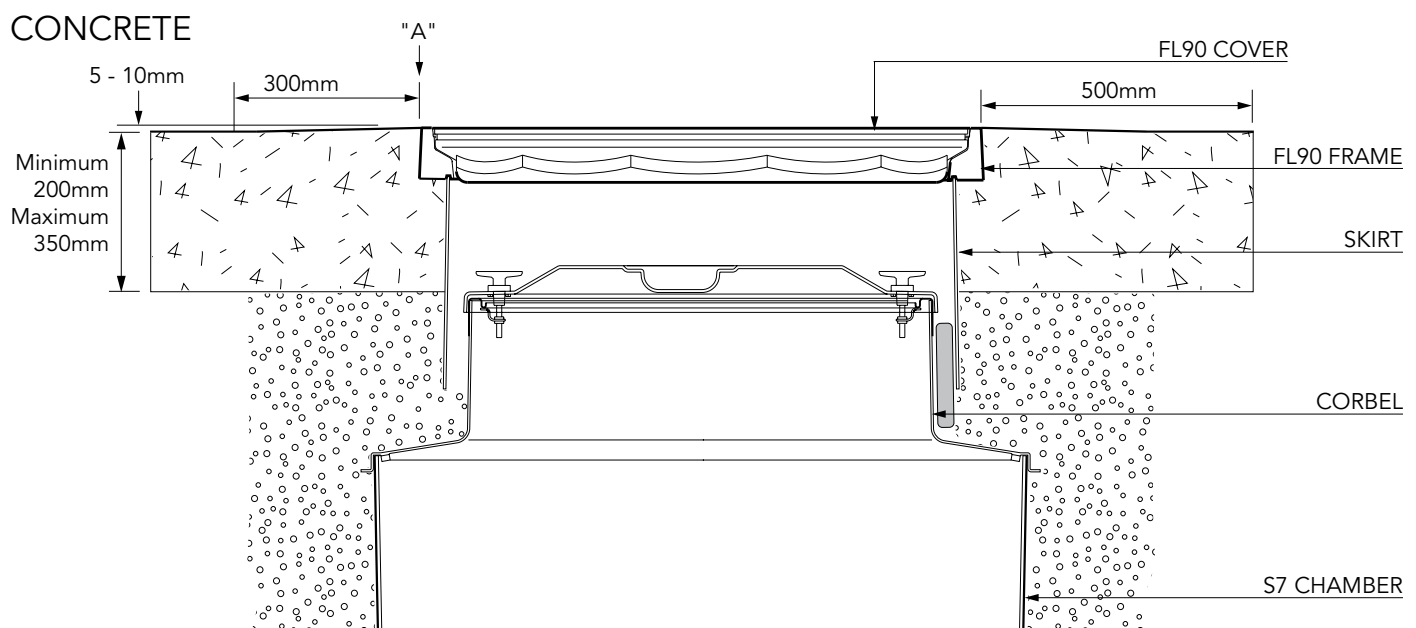

Complete backfilling to appropriate level. Frame must be supported by a minimum depth of 200mm of concrete

Concrete ties must be inserted as close to the frame as possible. Minimum block of 500mm square around the frame. Joint must be tied as per diagram. Continuous pour preferred if possible.

38

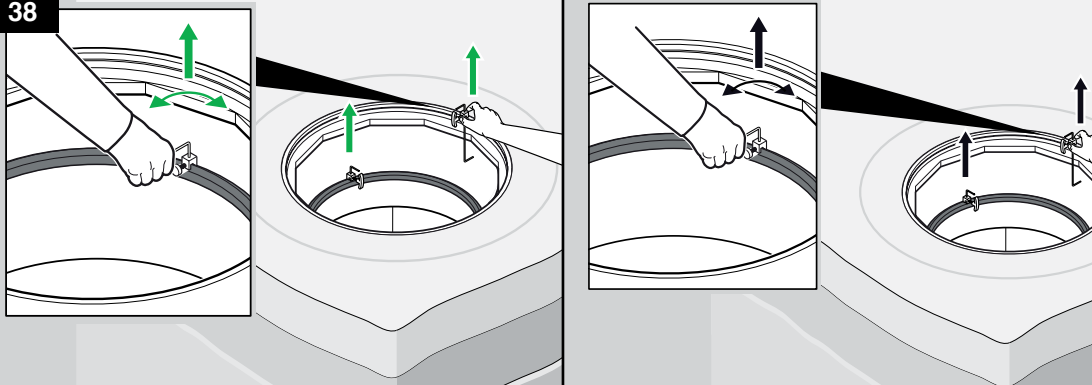

After minimum concrete cure time, hangers can be removed. Loosen the 'T' knob, push down on the rod, turn the rod through 90° and pull rod up to remove.

Complete other third party equipment installation inside the sump.


INSTALLATION INSTRUCTIONS

(Final Testing and Install)

FIBRELITE


PART OF OPW A DOVER COMPANY

39

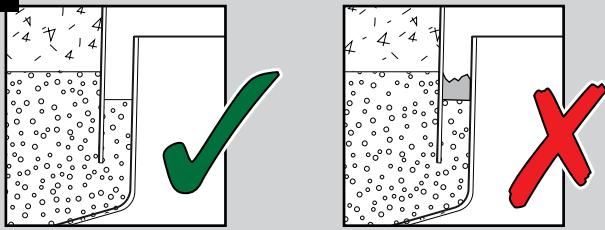

Ensure void is free of concrete to a depth of 90mm (120mm on a high water table installation).


40

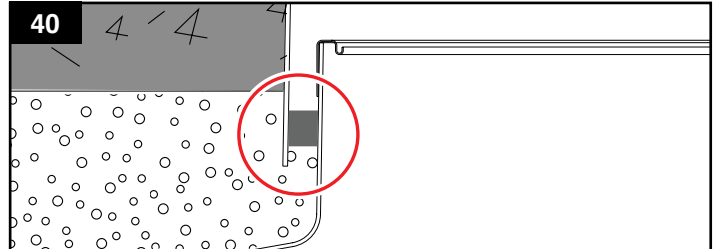

NB:- Area must NOT be filled with concrete

Void between corbel and skirt to be filled with pea gravel or sand.


41

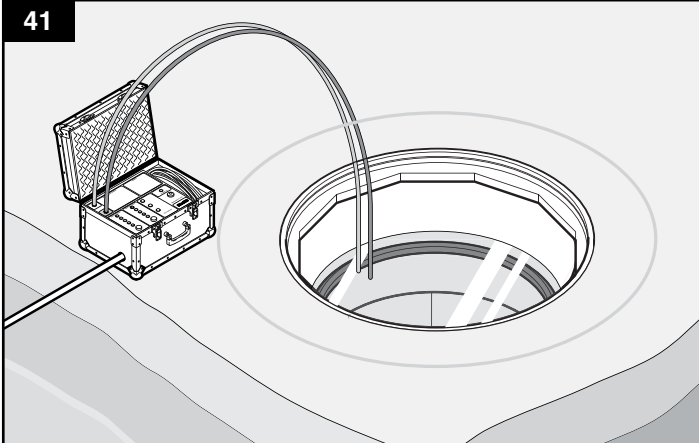

Test completed system.

Warning: Test the corbel at a 0.6m depth setting only or irreparable damage may occur.

42

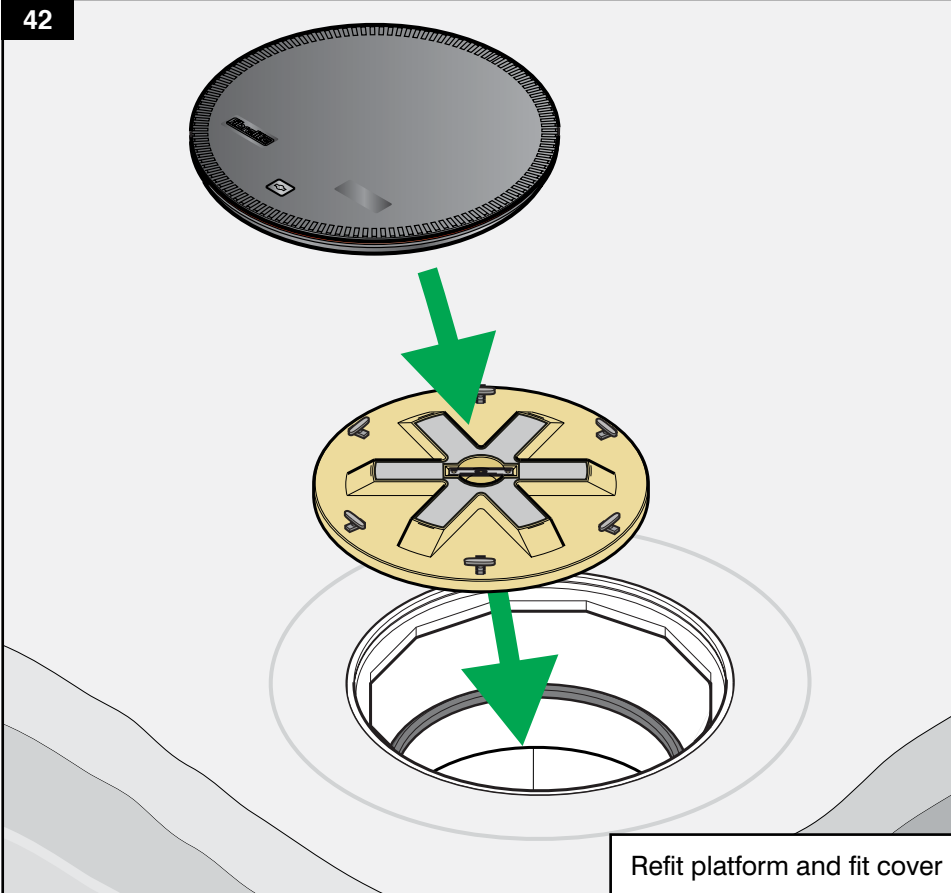

Refit platform and fit cover