





FL120-GP COVER

FL120 FRAME

300mm diameter flat sealed composite cover with a Grounding Point ID and a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



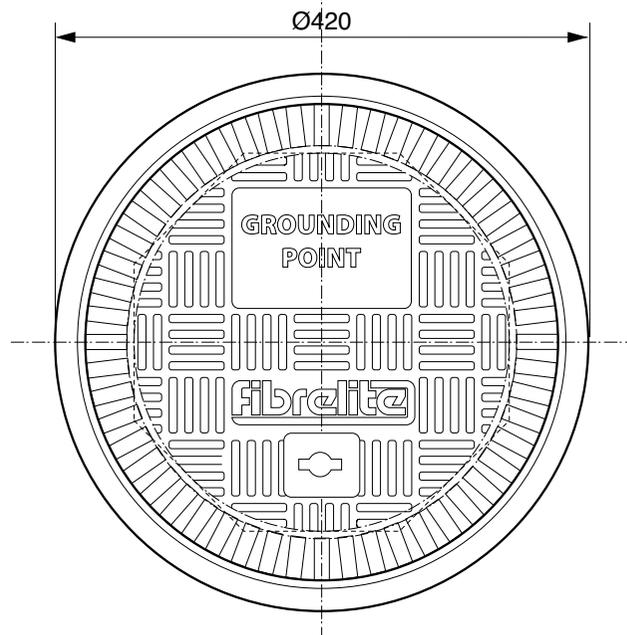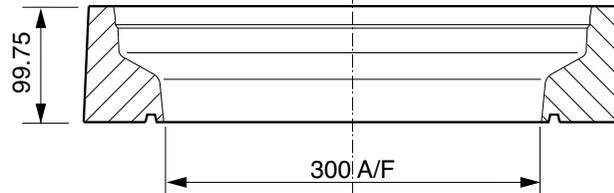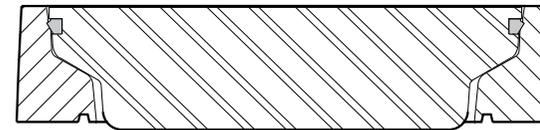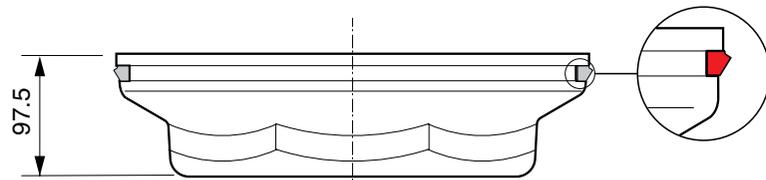

Load Rating	Cover Weight	Frame Weight
B125	5.5kg	4kg
C250	6.5kg	4kg
D400	6.75	4kg

300mm diameter flat sealed composite cover with a Grounding Point ID and a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



CONCRETE


VERY IMPORTANT

OUTER EDGE "A" OF FRAME SET 5 mm ABOVE GENERAL GRADE AREA WITH CONCRETE RAMPED AWAY OVER 300 mm


VERY IMPORTANT

The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.

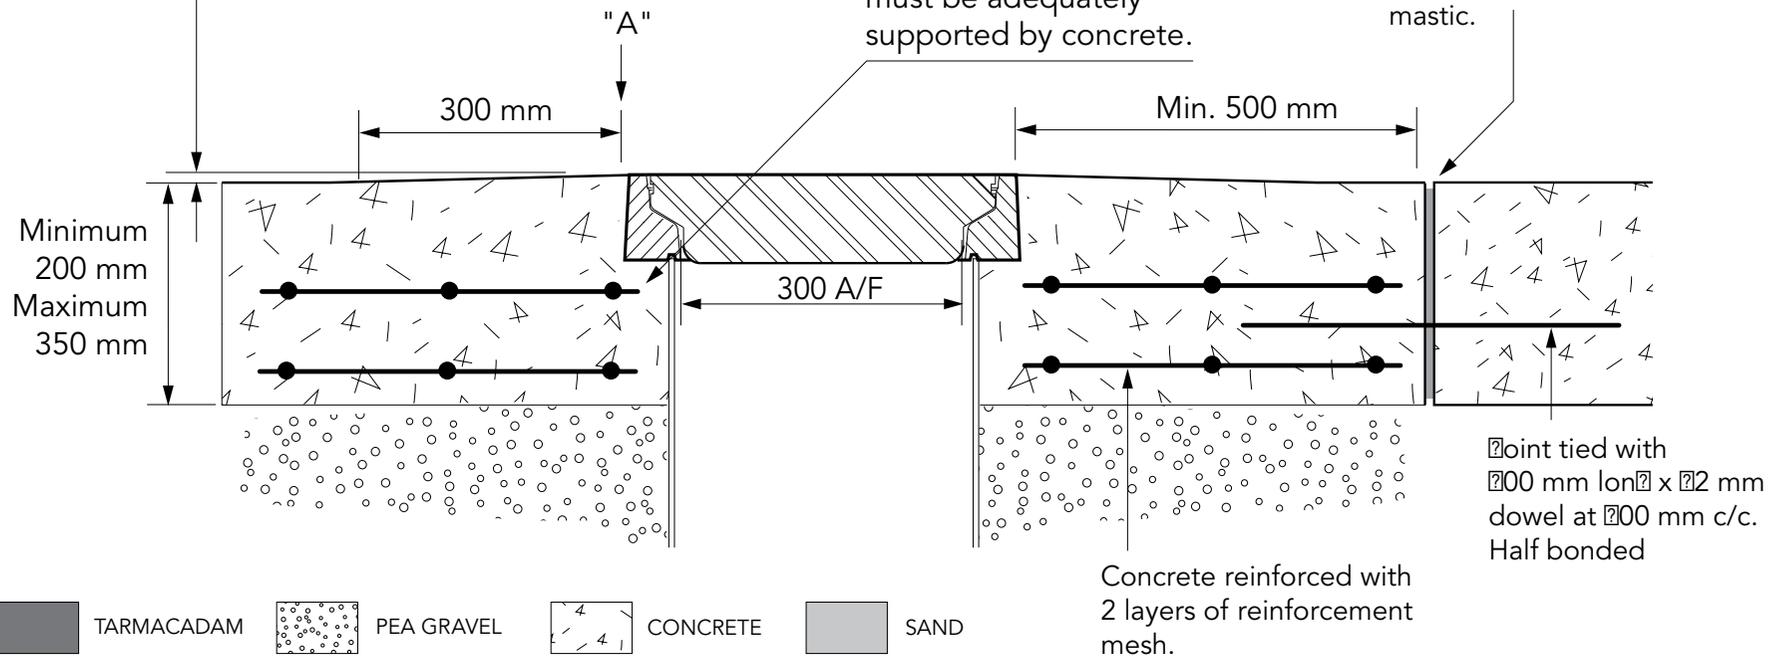

BLACKTOP

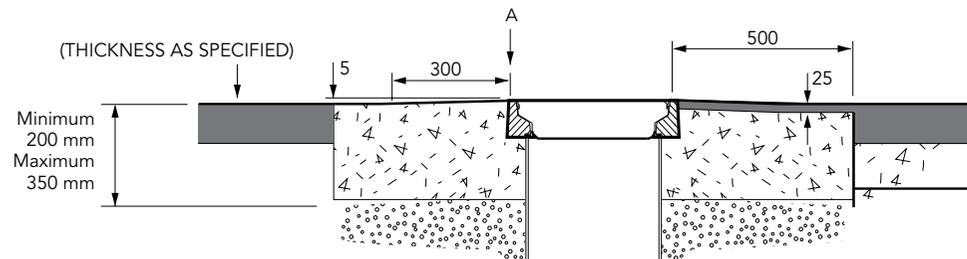

300mm diameter flat sealed composite cover with a Grounding Point ID and a composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOWER COMPANY