


Frame Assembly


Install the pre-laminated frame as per Figs. 1 and 2.

FIG. 1

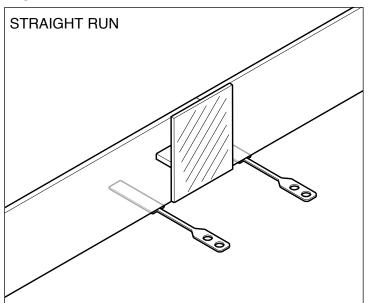

Installation


It is recommended that prior to concreting the covers are positioned into the frame and the frame is checked for flatness and sizing. On long stretches of trenching gaps may occur at the frame joints (refer to Fig. 5).




This is to allow expansion of the frame and the gaps will be filled with flexible sealant (40FC).

Create a rebate or Brickwork Footprint. Position the frame onto a bed of mortar, when the mortar is cured enough to sufficiently support the frame the surrounding area is to be concreted to the specified thickness and width with the concrete ties facing outwards (refer to Fig. 3).


NB: When installing for trench application where concrete is to form the ends of the trench the end covers must be positioned into the frame prior to concreting to establish the boundaries. (See Fig.4)

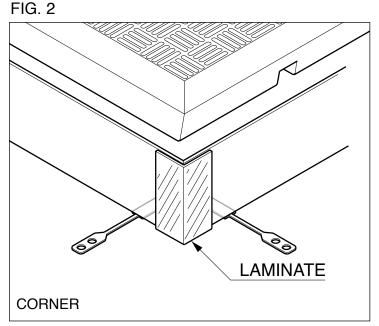



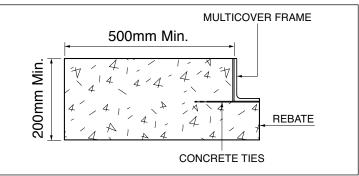



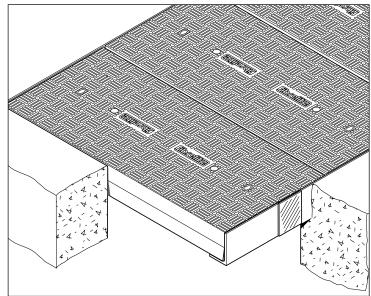

Issue: 13/05/2019

We've got you covered

UK Office: T: + 44 (0) 1756 799 773 USA Office: T: + 1 800 422 2525 F: + 44 (0) 1756 799 539, E: enquiries@fibrelite.com : F: + 1 (800) 421 3297, E: enquiries@fibrelite.com : F: + 603-7846 7788, E: enquiries@fibrelite.com

Malaysia Office: T: + 603-7847 1888