



Pipe & Cable Entry Sealkits For Forecourt Applications

FIBRELITE 

PART OF OPW a **DOVER** company

RETAIL FUELLING
INDUSTRIAL
TRENCH
STEAM

One Superior Standard - Providing Perfect Watertight Sealing of Cable Penetrations and Pipework

Primary Pipe Entry Sealkits

The unique design allows a single hole installation. No additional screw holes need to be drilled. This provides the installer with a quick and easy installation and minimises potential leak paths through the sump wall. Our single sided and double sided entry sealkits will fit all types of primary pipework on the market. All sealkits are resistant to hydrocarbons. Our sealkits are resistant to a wide range of fuels and chemicals. Available materials: EPDM, NBR (Nitrile) and Viton (FKM). Please contact us for further details.

Single-sided Pipe Entry Sealkits

| Product Code | Description | Pipe O/D (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|-------------------|---------------|----------------------|----------------|
| PSB-40 | To fit 40mm pipe | 35 - 43 | 190 | 150 |
| PSB-54 | To fit 54mm pipe | 49 - 57 | 190 | 150 |
| PSB-50 | To fit 50mm pipe | 45 - 53 | 190 | 150 |
| PSB-63 | To fit 63mm pipe | 57 - 66 | 190 | 150 |
| PSB-75 | To fit 75mm pipe | 68 - 79 | 190 | 150 |
| PSB-90 | To fit 90mm pipe | 81 - 95 | 190 | 150 |
| PSB-110 | To fit 110mm pipe | 99 - 115 | 190 | 150 |
| PSB-125 | To fit 125mm pipe | 112 - 131 | 240 | 190 |
| PSB-140 | To fit 140mm pipe | 126 - 147 | 240 | 190 |
| PSB-160 | To fit 160mm pipe | 153 - 162 | 240 | 190 |

Double-sided Pipe Entry Sealkits

| Product Code | Description | Pipe O/D (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|-------------------|---------------|----------------------|----------------|
| PSBD-40 | To fit 40mm pipe | 35 - 43 | 190 | 150 |
| PSBD-54 | To fit 54mm pipe | 49 - 57 | 190 | 150 |
| PSBD-50 | To fit 50mm pipe | 45 - 53 | 190 | 150 |
| PSBD-63 | To fit 63mm pipe | 57 - 66 | 190 | 150 |
| PSBD-75 | To fit 75mm pipe | 68 - 79 | 190 | 150 |
| PSBD-90 | To fit 90mm pipe | 81 - 95 | 190 | 150 |
| PSBD-110 | To fit 110mm pipe | 99 - 115 | 190 | 150 |
| PSBD-125 | To fit 125mm pipe | 112 - 131 | 240 | 190 |
| PSBD-140 | To fit 140mm pipe | 126 - 147 | 240 | 190 |
| PSBD-160 | To fit 160mm pipe | 153 - 162 | 240 | 190 |



Vent Transition Sump Entry Sealkits

Vent riser entry boots have a rounded profile to encourage rainwater run-off and are made from a UV resistant rubber. We recommend the installation of the VT-CAP to give added protection against UV in sunny climates.

| Product Code | Description | Pipe O/D (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|-----------------------------------|---------------|----------------------|----------------|
| PSB-63-VT | To fit 63mm (2") dia. vent riser | 57 - 66 | 190 | 150 |
| VT-CAP-63 | UV protective cap, fits PSB-63-VT | | | |
| PSB-90-VT | To fit 90mm (3") dia. vent riser | 68 - 79 | 190 | 150 |
| VT-CAP-90 | UV protective cap, fits PSB-90-VT | | | |



Entry Sealkits for Retractable Pipework Systems

Our new range of entry sealkits are designed to seal between the outer duct and the secondary contained or primary pipe. The fitting is supplied with a Schrader valve to allow pressure testing and/or permanent monitoring of the interstitial space. Our sealkits are resistant to a wide range of chemicals associated with industrial and utility installations. Available materials: EPDM, NBR (Nitrile) and Viton (FKM). Please contact us for further details.

OPW Pipework Entry Sealkits

| Product Code | Description | Duct O/D (mm) | Pipe O/D (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|---|---------------|---------------|----------------------|----------------|
| PDBD-115-63 | To seal between 115mm duct and 63mm (2") OPW Pipe | 115 | 63 | 190 | 150 |
| PDBD-115-50 | To seal between 115mm duct and 50mm (1 1/2") OPW Pipe | 115 | 50 | 190 | 150 |

UPP Pipework Entry Sealkits

| Product Code | Description | Duct O/D (mm) | Pipe O/D (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|--|---------------|---------------|----------------------|----------------|
| PDBD-110-75 | To seal between 110mm duct and 75mm UPP Pipe | 110 | 75 | 190 | 150 |



Cable Entry Sealkits

Our PCE range of sealkits are designed to fit 110mm (4") dia. duct. The unique one hole design makes it quick and easy to install and removes potential leak paths from additional screw holes. All sealkits are resistant to hydrocarbons.


| Product Code | Description | No. of Cables | Cable Size (mm) | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|--|---------------|-----------------|----------------------|----------------|
| PCE-1 | Duct seal with 4 compression seals. | 1 - 4 | 9 - 20 | 190 | 150 |
| | Designed to fit inside a PSB-110 entry kit (not included). | 1 - 12 | 5 - 8 | | |
| | Will seal up to 12 cables. | | | | |
| PCE-1-KIT | PCE-1 complete with PSB-110 sealkit (to seal 110mm duct). | 1 - 4 | 9 - 20 | 190 | 150 |
| | | 1 - 12 | 5 - 8 | | |
| PCE-2 | 110mm rubber cable entry boot to seal up to 16 cables. Includes 16 cable ties. | 1 - 16 | 5 - 20 | 190 | 150 |



Conduit Entry Sealkits

The PEC range of screw type fitting enables a quick and easy installation. Drill only one hole in the sump wall. Screw components together and tighten 1 locking screw. All sealkits are resistant to hydrocarbons.

| Product Code | Description | Suitable for | Size | Flange Ring O/D (mm) | Hole Size (mm) |
|--------------|--|-------------------------------|-----------------------------|----------------------|----------------|
| PEC-25 | Suitable for 25mm conduit | 1 Conduit | 25mm | 75 | 44 |
| PEC-27 | Suitable for 3/4" steel conduit | 1 Conduit | 3/4" | 85 | 51 |
| PEC-32 | Suitable for 32mm conduit | 1 Conduit | 32mm | 85 | 51 |
| PEC-33 | Suitable for 1" steel conduit | 1 Conduit | 1" | 90 | 60 |
| PEC-50 | Suitable for 1 1/2" steel conduit or 50mm pipe | 1 Conduit 1 Pipe | 1 1/2" 50mm | 95 | 73 |
| PEC2-33 | Grounding cable seal to fit 1" steel conduit | 1 Cable 3 Cables | 9 - 20mm 5 - 8mm | 90 | 60 |
| PEC2-50 | Grounding cable seal to fit 1 1/2" steel conduit or 50mm dia. plastic pipe | 1 Cable 3 Cables 1 Pipe | 9 - 20mm 5 - 8mm 50mm | 95 | 73 |

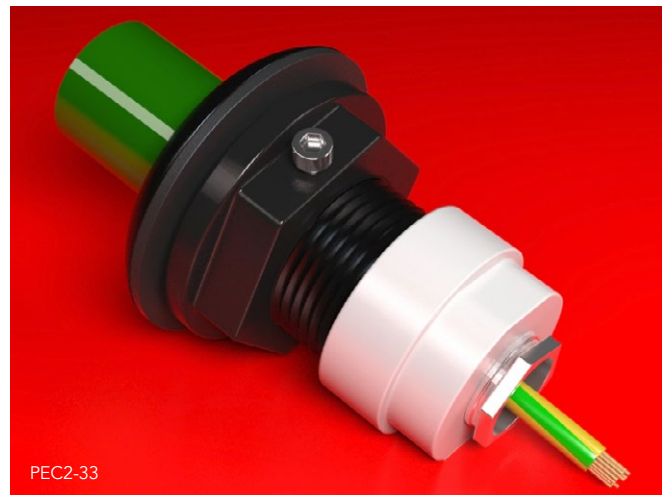

If you'd like to stay in touch with all that's happening at Fibrelite then join the conversation on our social media channels. You'll find us on LinkedIn, X, Facebook & Youtube.



UK Office:
Snaygill Industrial Estate
Keighley Road
Skipton
North Yorkshire
BD23 2QR
UK
Tel: +44 (0) 1756 799 773
Email: enquiries@fibrelite.com

USA Office:
3250 US Highway 70 Business West
North Carolina
Smithfield
NC 27577
USA
Tel: +1 800 422 2525
Email: enquiries@fibrelite.com

Malaysia Office:
Lot P.T.27259,
Jalan Sigma U6/14,
Bukit Cherakah, Seksyen U6,
40150 Shah Alam,
Selangor Darul Ehsan
Tel: + 603 7847 1888
Email: enquiries@fibrelite.com