
1.45m diameter sump with collar ring, corbel, platform, adjustable height skirt and round 1020mm flat sealed cover and frame with central fill cover. For reference purposes only. This drawing is not a specification. Order against product ode only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice. FIBRELITE S15CR-3100-CF Issue: 11/06/2016 Page: 1 of 4 © Copyright				
SI5CH-3100-CF ISSUE: 11/06/2016 Page: 1 of 4 © Copyright		enable continuous impro- designs and specification without notice.	vement of our products, the is are subject to change	

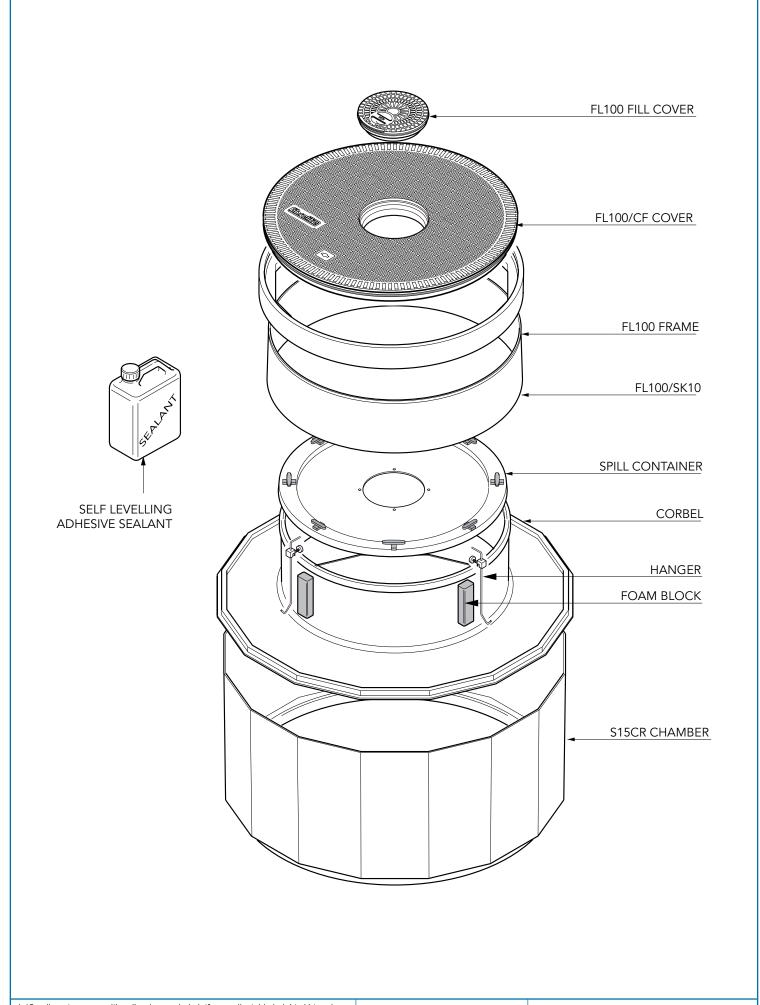

1.45m diameter sump with collar ring, corbel,platform, adjustable height skirt and round 1020mm flat sealed cover and frame with central fill cover.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

PART OF OPW ADDER





TYPICAL INSTALLATION

