
<image/>	
1.45m diameter sump with collar ring, corbel, internal lid, adjustable height skirt and round 1020mm flat sealed cover with an offset manual dip cover and frame. For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice. For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice. For setting to the set	E



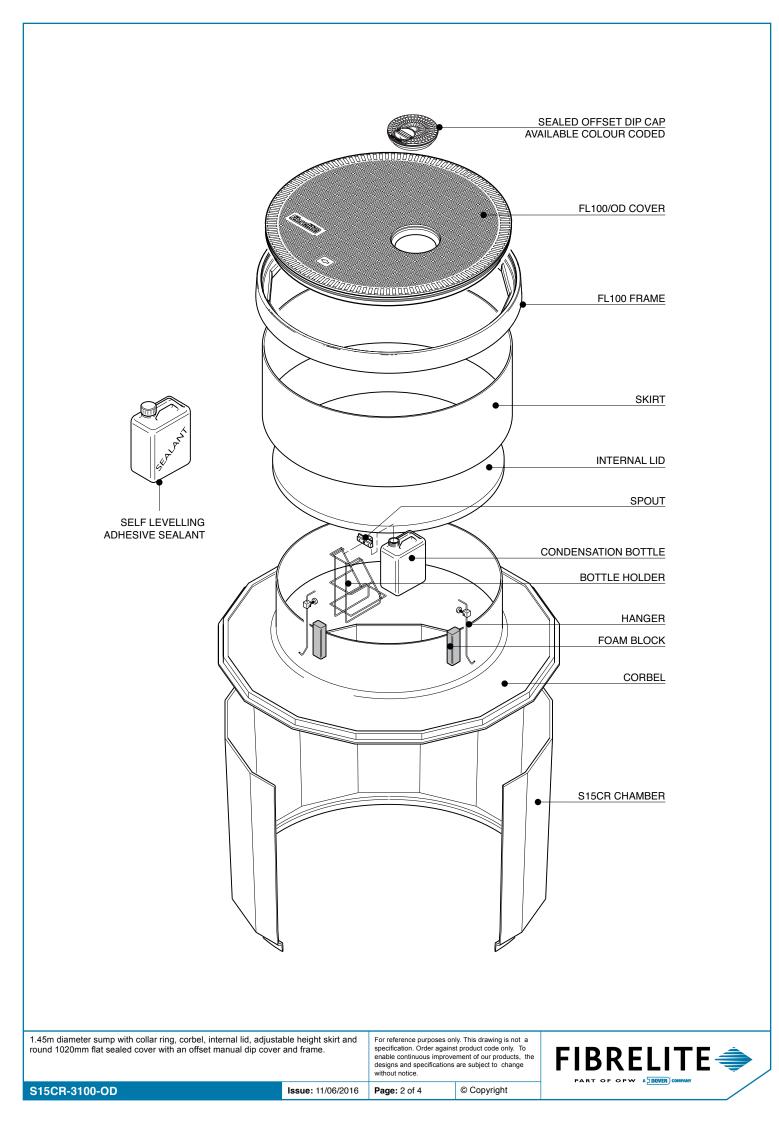

mastic.


Expansion joint filled

with petrol resistant

PART OF OPW ADDER

VERY IMPORTANT The underside of the frame must be adequately FL100 DIP COVER "A' supported by concrete. FL100 COVER 500mm 300mm t 4

TYPICAL INSTALLATION

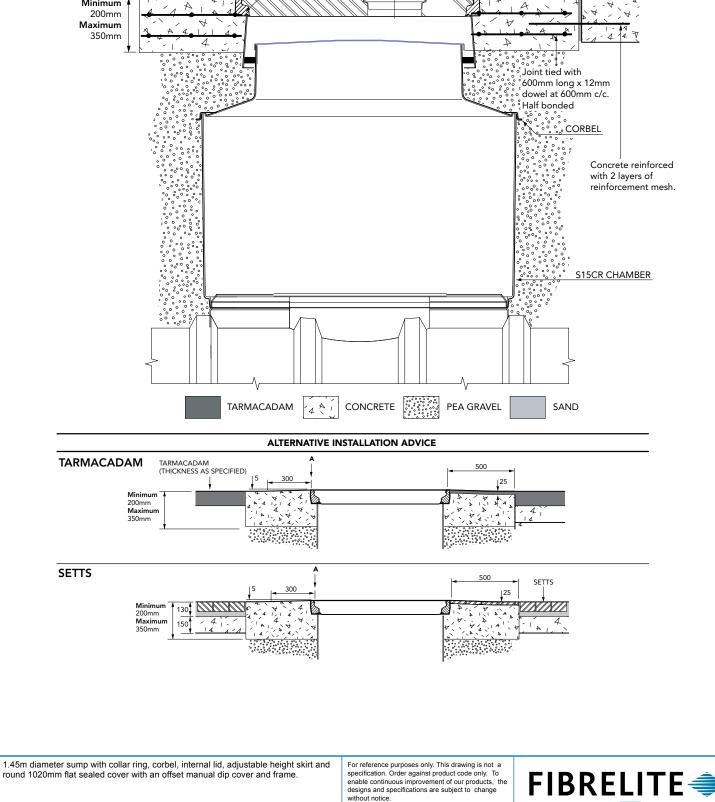

Issue: 11/06/2016

Page: 3 of 4

© Copyright

CONCRETE

Minimum

5 - 10mm

