


1.45 m diameter sump with collar ring, corbel, adjustable height skirt and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

S15CR-3100 Issue: 11/06/2016 Page: 1 of 4

© Copyright

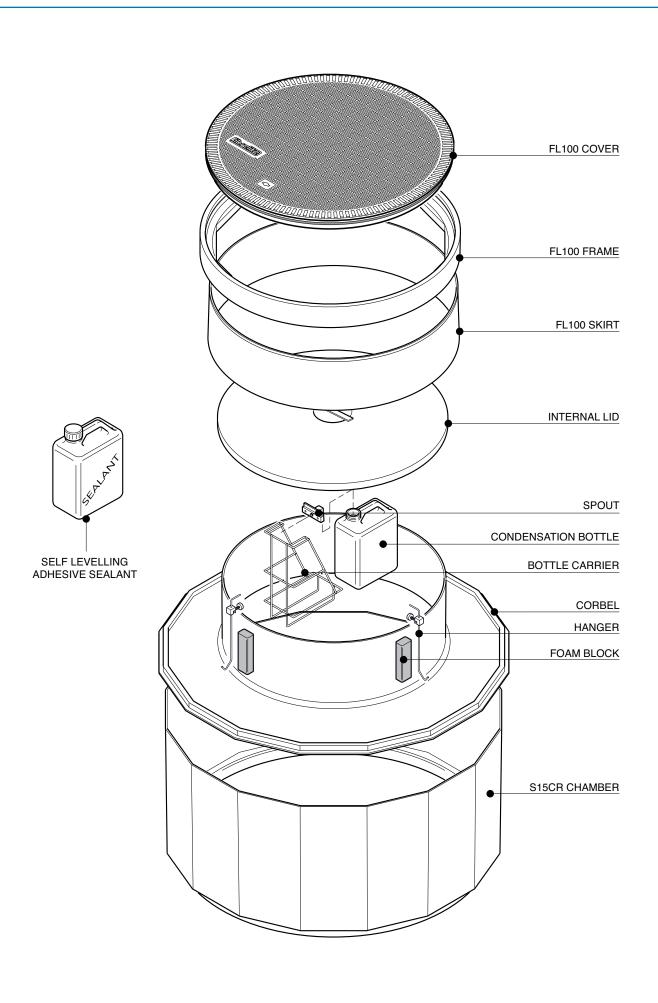


1.45 m diameter sump with collar ring, corbel, adjustable height skirt and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S15CR-3100 Issue: 11/06/2016 Page: 2 of 4

© Copyright

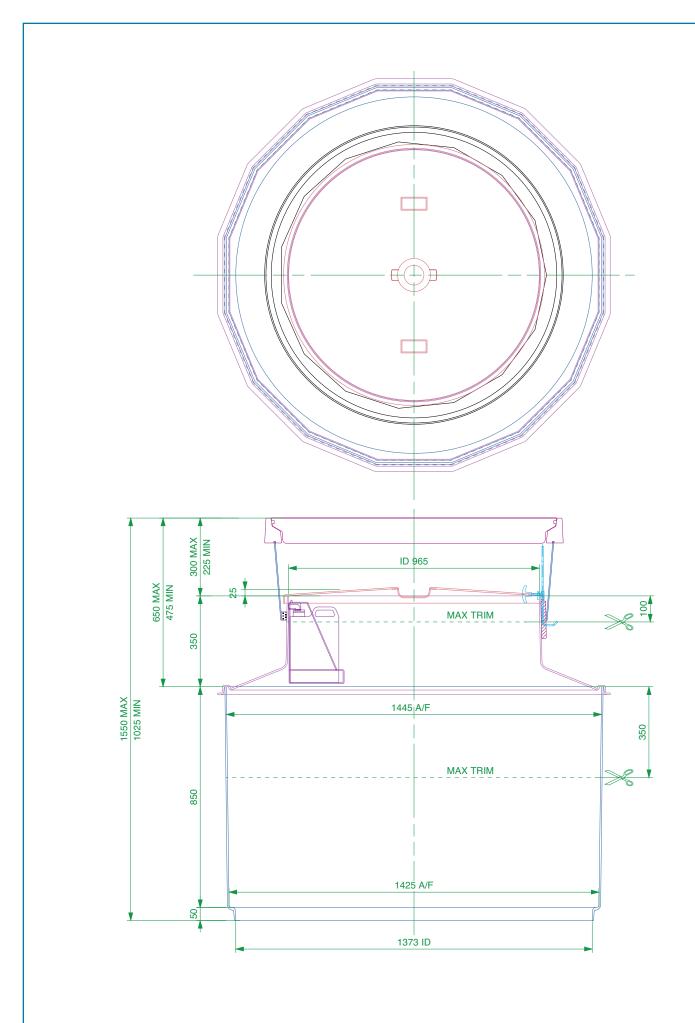

1.45 m diameter sump with collar ring, corbel, adjustable height skirt and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




S15CR-3100 Issue: 11/06/2016


Page: 3 of 4

© Copyright



TYPICAL INSTALLATION

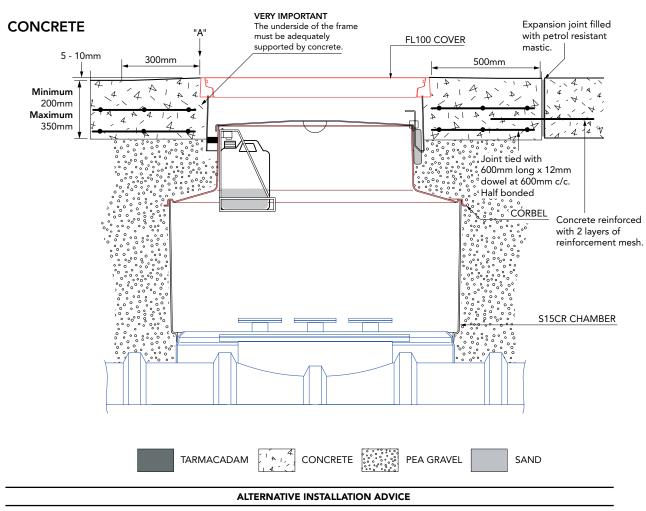

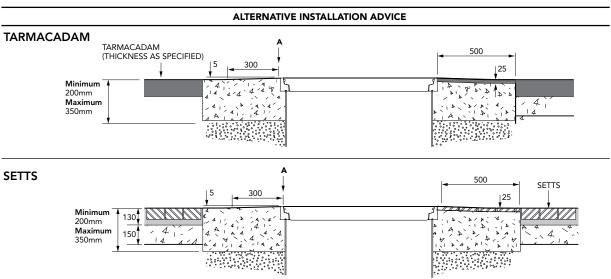

1.45m diameter sump with collar ring, corbel, adjustable height skirt and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE PART OF OPW A DOVER COMPANY