


1.5 m diameter 12 sided sump with reverse flange, corbel, adjustable height skirt, internal lid, and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



\$16-3100 | Issue: 11/06/2016 | Page: 1 of 4 | © Copyright

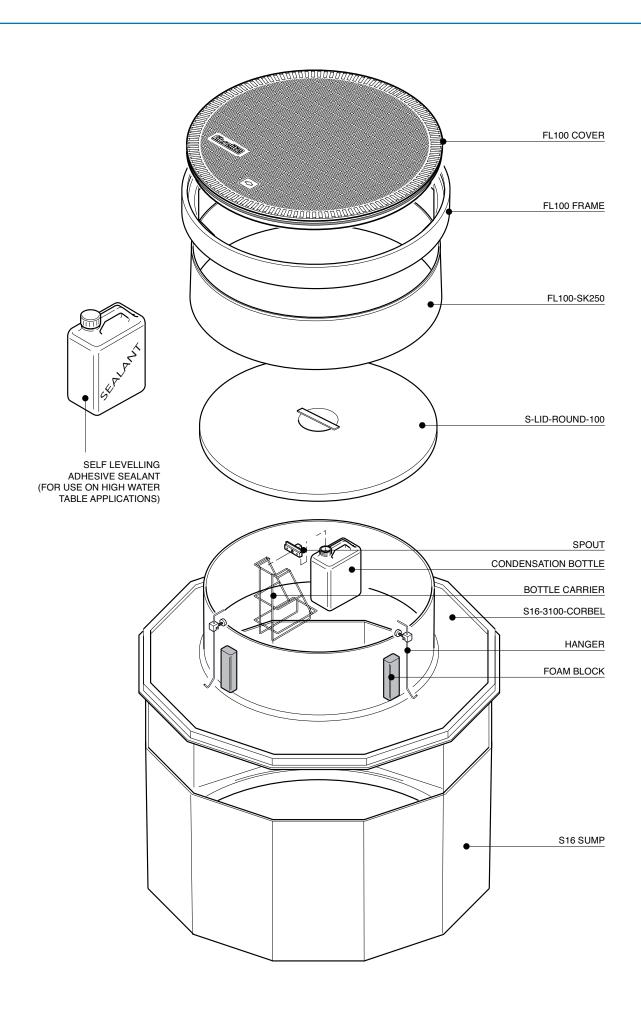


1.5 m diameter 12 sided sump with reverse flange, corbel, adjustable height skirt, internal lid, and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S16-3100 Issue: 11/06/2016 Page: 2 of 4 © Copyright

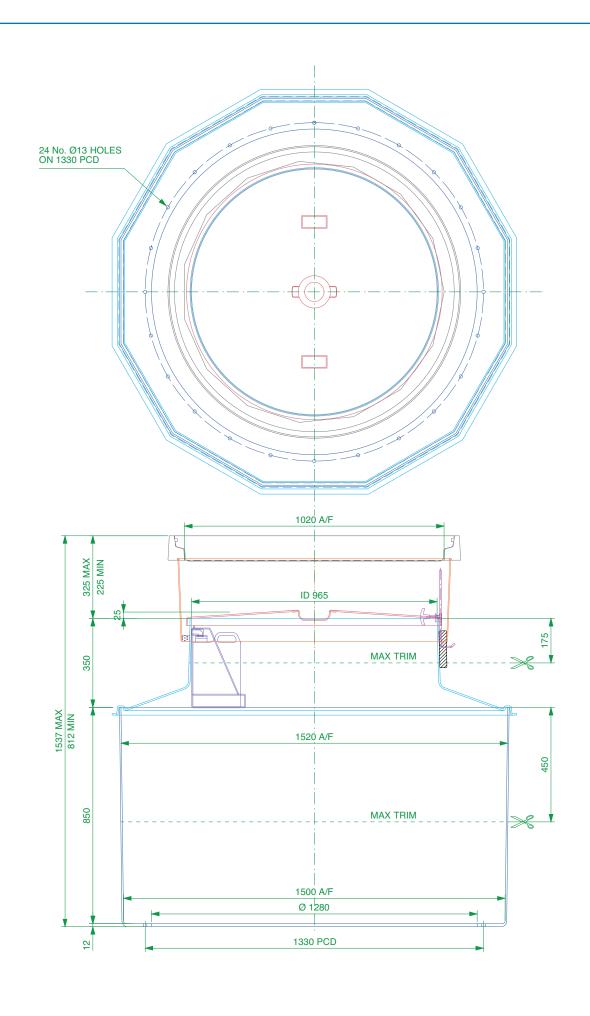

1.5 m diameter 12 sided sump with reverse flange, corbel, adjustable height skirt, internal lid, and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S16-3100 Issue: 11/06/2016

Page: 3 of 4


© Copyright




## VERY IMPORTANT OUTER EDGE "A" OF FRAME SET 5 - 10MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM.



## **TYPICAL INSTALLATION**

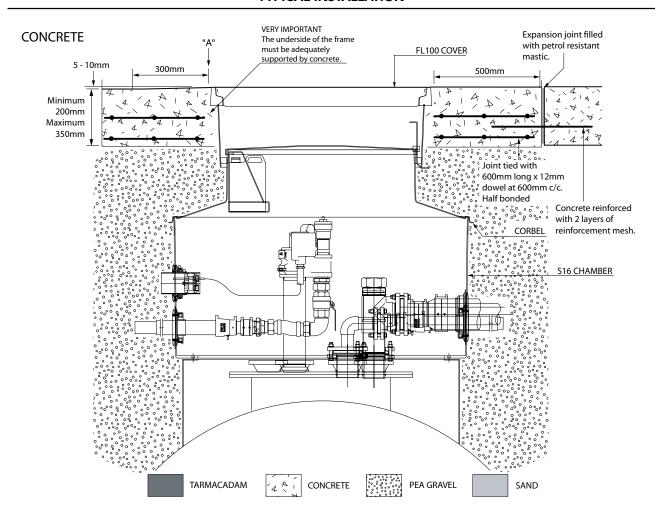

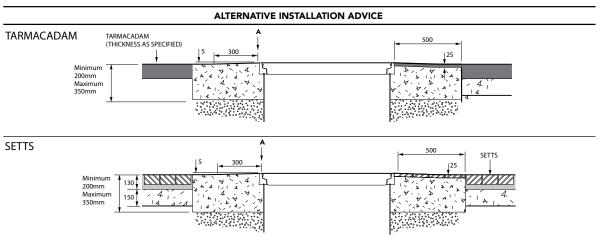

1.5m diameter 12 sided sump with reverse flange, corbel, adjustable height skirt, internal lid, and round 1020mm flat sealed cover and frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE PART OF OPW A DOVER COMPANY

S16-3100 Issue: 11/06/2016 Page: 4 of 4

© Copyright