



1237 mm x 686 mm x 1257 mm deep GRP above ground fill sump with hinged door to fit up to 4 fill lines. System includes internal spill tray, pipework support rail and concrete tie fixings.

S19-2-AGF

© Copyright

Issue: 05/08/2015

Page: 1 of 4





FIBRELITE

PART OF  
**OPW**

A DOVER COMPANY

**LID INTERFACE DETAIL  
IN THE CLOSED POSITION**

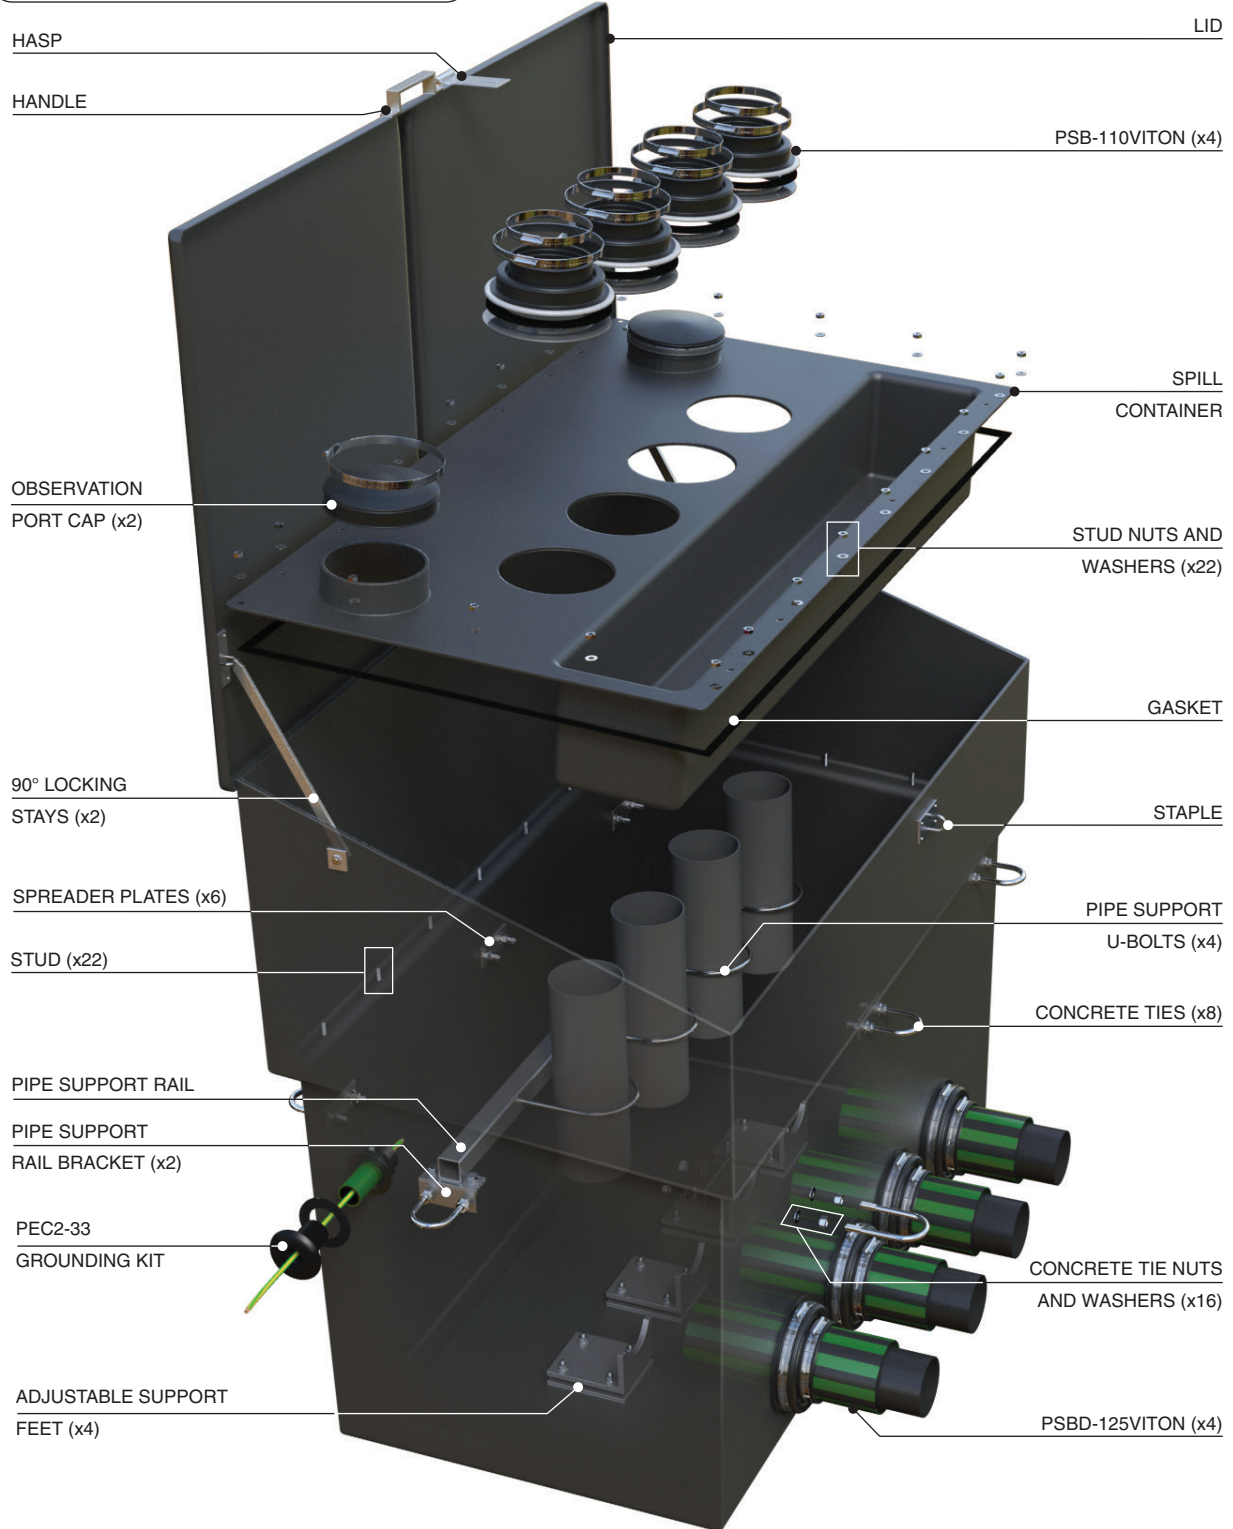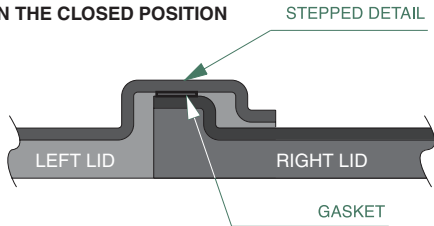

HASP

HANDLE

OBSERVATION  
PORT CAP (x2)

90° LOCKING  
STAYS (x2)

SPREADER PLATES (x6)

STUD (x22)

PIPE SUPPORT  
RAIL

PIPE SUPPORT  
RAIL BRACKET (x2)

PEC2-33  
GROUNDING KIT

ADJUSTABLE SUPPORT  
FEET (x4)

LID

PSB-110VITON (x4)

SPILL  
CONTAINER

STUD NUTS AND  
WASHERS (x22)

GASKET

STAPLE

PIPE SUPPORT  
U-BOLTS (x4)

CONCRETE TIES (x8)

CONCRETE TIE NUTS  
AND WASHERS (x16)

PSBD-125VITON (x4)

1237 mm x 686 mm x 1257 mm deep GRP above ground fill sump with hinged door to fit up to 4 fill lines. System includes internal spill tray, pipework support rail and concrete tie fixings.



CONCRETE


TYPICAL INSTALLATION



PEA GRAVEL



CONCRETE

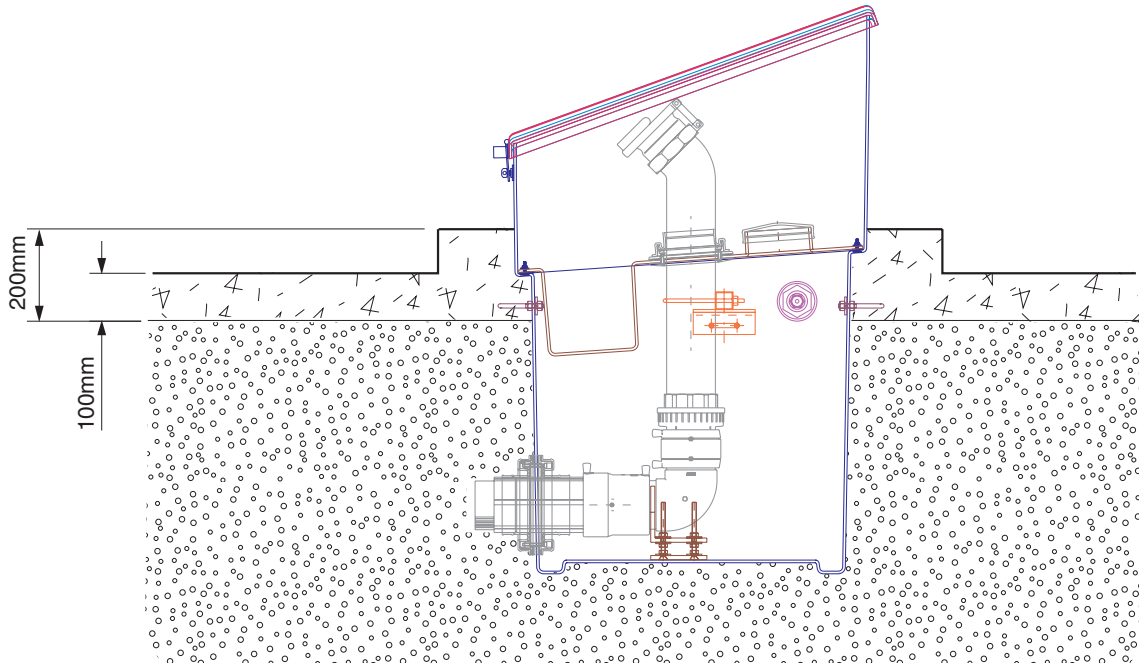

1237 mm x 686 mm x 1257 mm deep GRP above ground fill sump with hinged door to fit up to 4 fill lines. System includes internal spill tray, pipework support rail and concrete tie fixings.

