
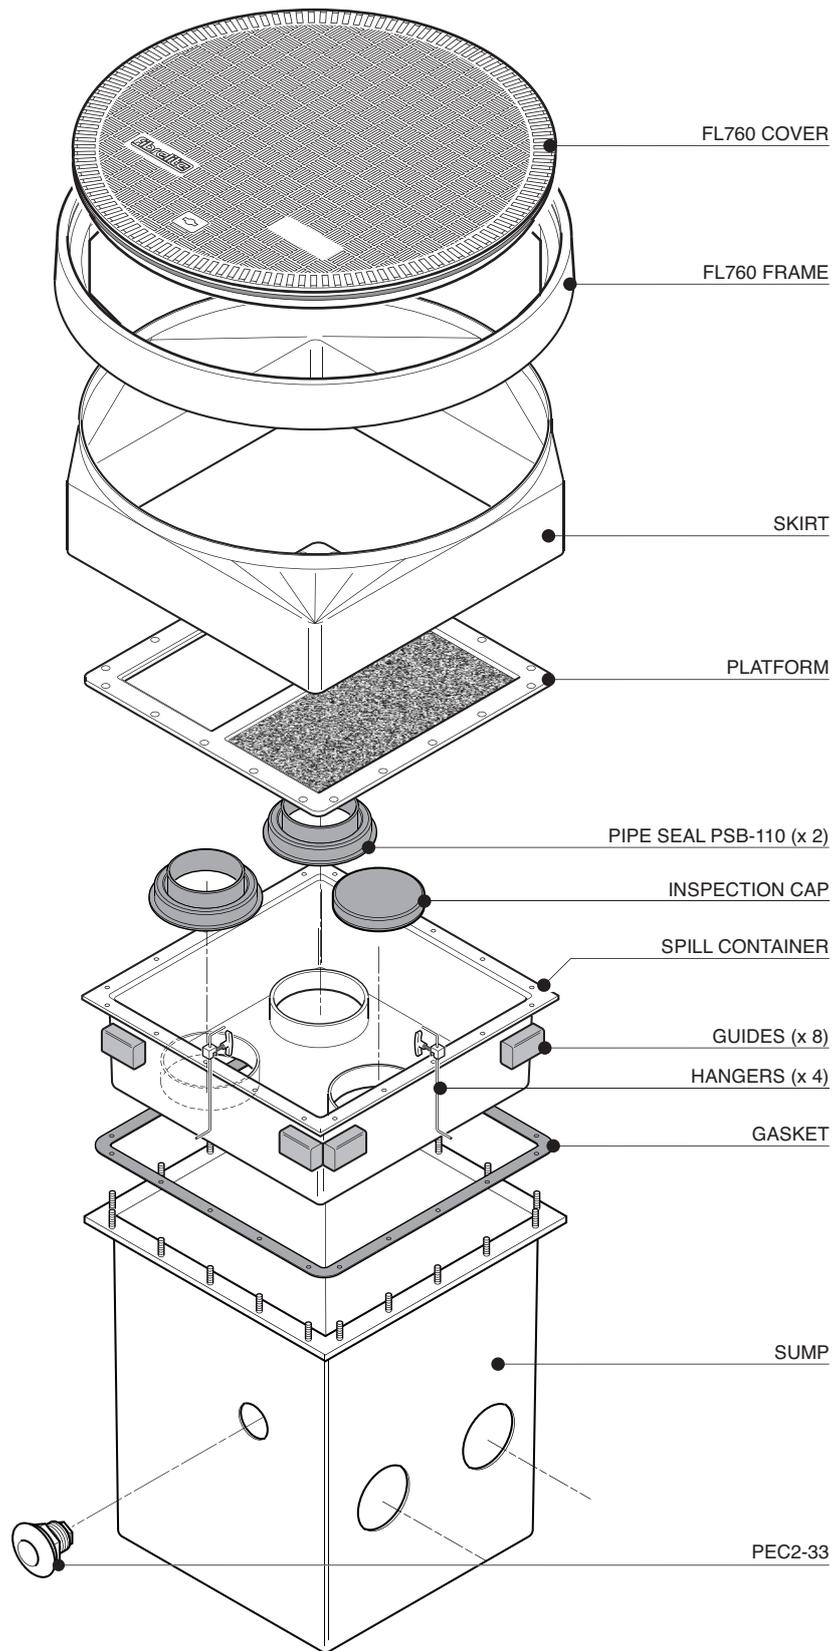


490mm square x 600mm deep offset fill chamber system with adjustable skirt, spill container, platform, 1/2 tin of sealant and FL760 flat sealed cover with composite frame. Includes inspection port cap, pipe entry and penetration fitting for grounding connection. Includes preinstalled KPS pipework for 2 fills.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY



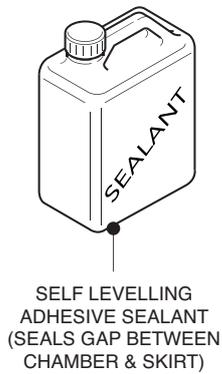


490mm square x 600mm deep offset fill chamber system with adjustable skirt, spill container, platform, 1/2 tin of sealant and FL760 flat sealed cover with composite frame. Includes inspection port cap, pipe entry and penetration fitting for grounding connection. Includes preinstalled KPS pipework for 2 fills.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

ITEM	DESCRIPTION	CODE	QTY
1	Fibrelite FL760 Cover	FL760C	1
2	Fibrelite FL760 Frame	FL760F	1
3	Fibrelite 270mm Deep Skirt	FL760-SK300-OF	1
4	Fibrelite Spill Container	S2-SC-760-ROW	1
5	Fibrelite 490sq x 600mm Sump	S2-OFB-600D	1
6	Fibrelite Grounding Cable Seal	PEC-2-33	1
7	Fibrelite Pipe Support	PSF	2
8	Fibrelite Platform	S2-3760-OF-PLAT	1
9	Fibrelite Self-levelling Seal	S-CS-SEALANT	1
10	Fibrelite Observation Well	--	1


ITEM	DESCRIPTION - 4" FILL	QTY
11	KPTM125 / 110SCOI Secondary Contained Sump Entry Fitting	2
12	KPS 125 / 110 Secondary Container Pipe	2
13	KPC12 110 / Flange Kit	2
14	KP 90/100 4" Elbow	2
15	4GI Pipe / 4" Barrel Nipple	2
16	Fibrelite PSB-110G-V Viton Entry Boot	2

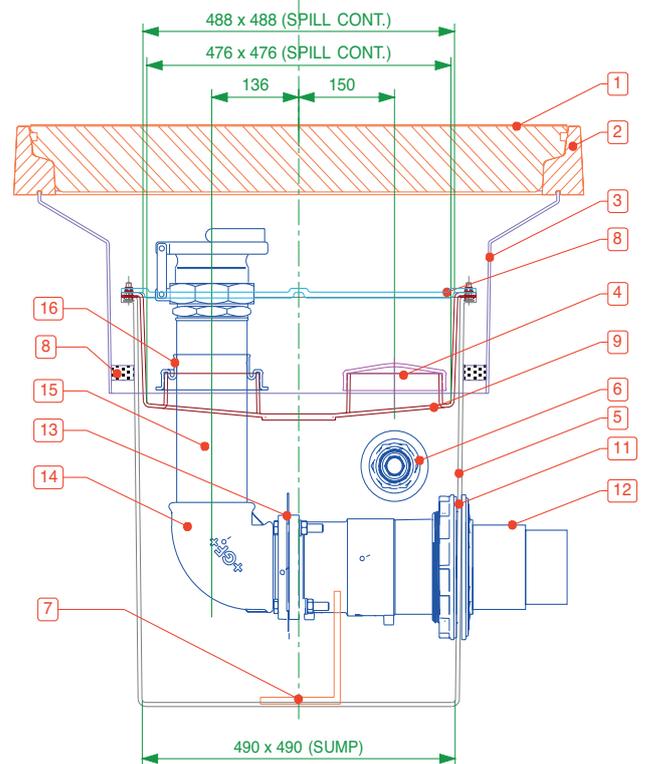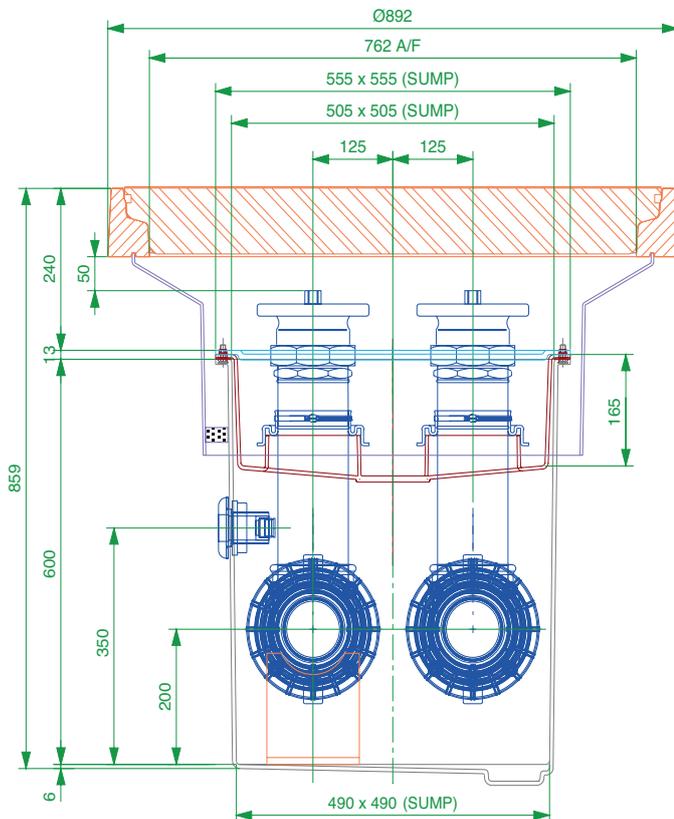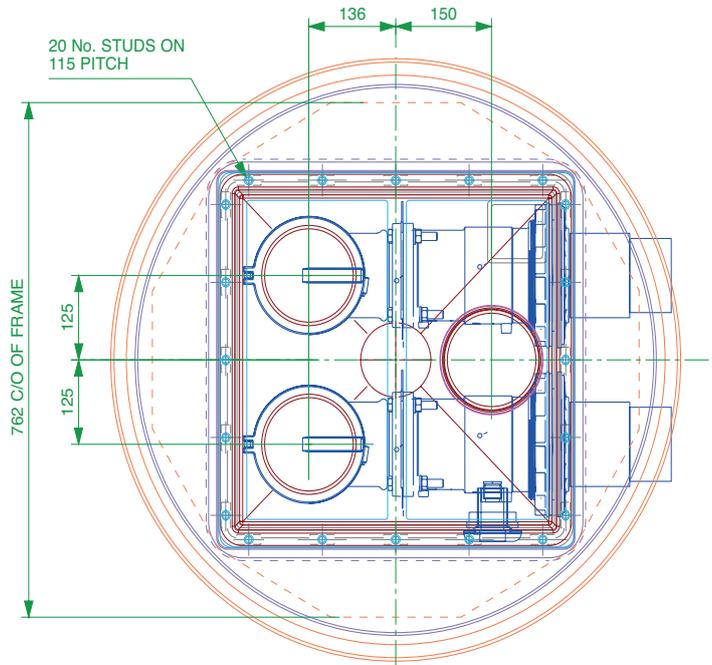

NOTES:


- SUPPLIED WITH 4 No. HANGERS AND 8 No. FOAM GUIDES
- SPILL CONTAINMENT CAPACITY = 35 Litres / 9.25 US GALL

TYPICAL INSTALLATION

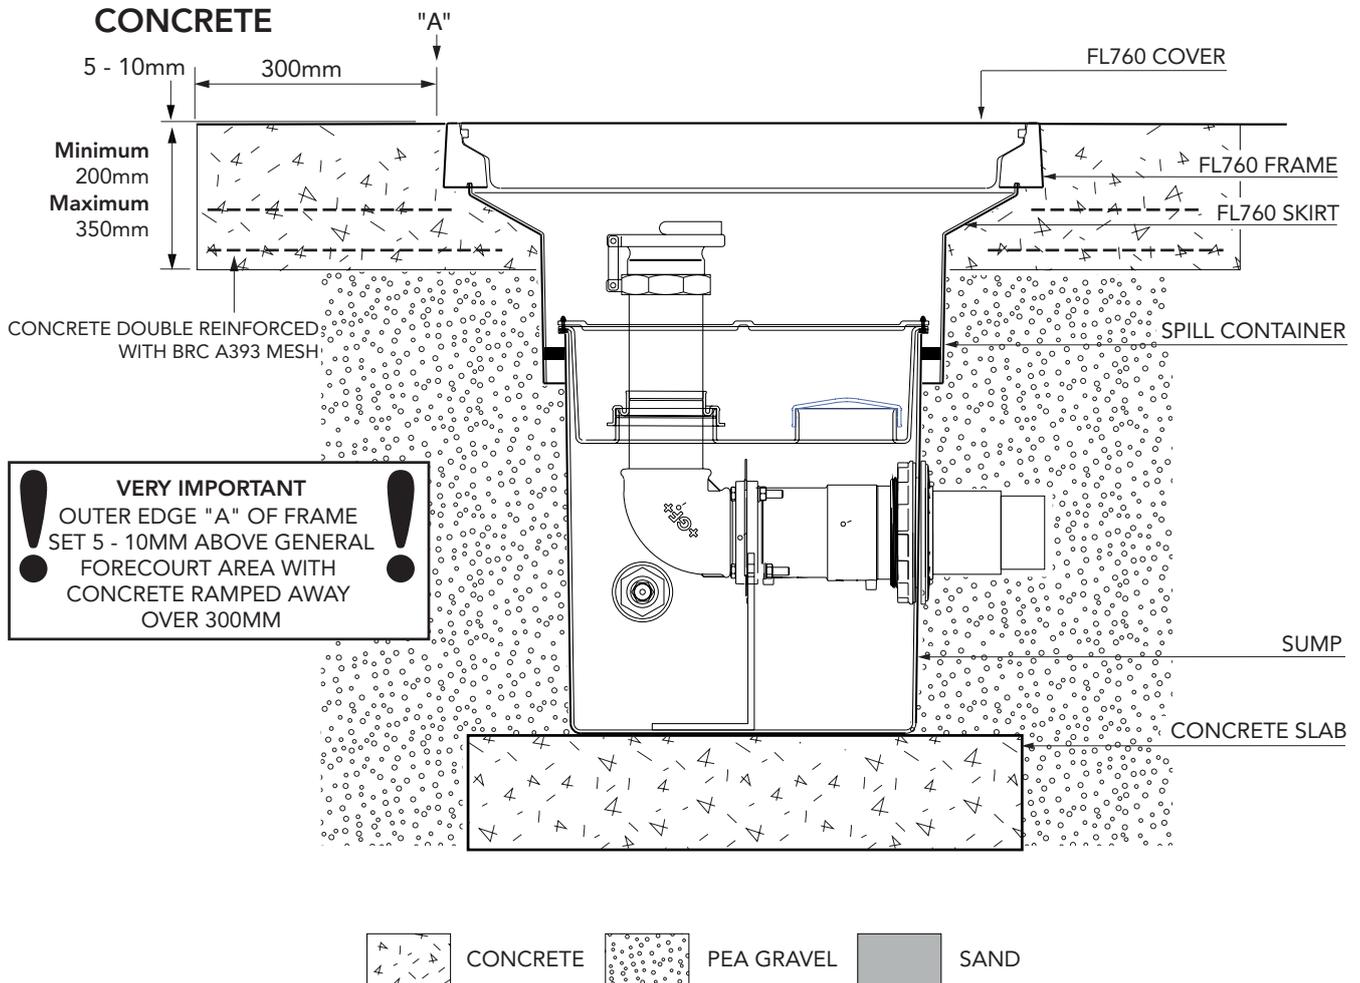

ALTERNATIVE INSTALLATION ADVICE

SETTS

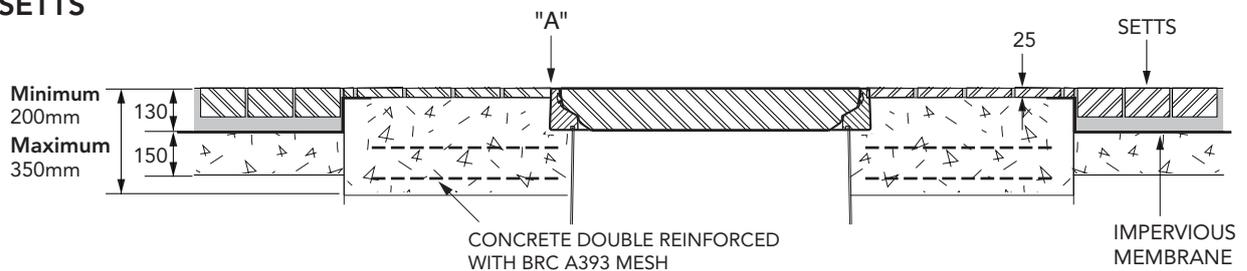

490mm square x 600mm deep offset fill chamber system with adjustable skirt, spill container, platform, 1/2 tin of sealant and FL760 flat sealed cover with composite frame. Includes inspection port cap, pipe entry and penetration fitting for grounding connection. Includes preinstalled KPS pipework for 2 fills.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

PART OF OPW A DOVER COMPANY