
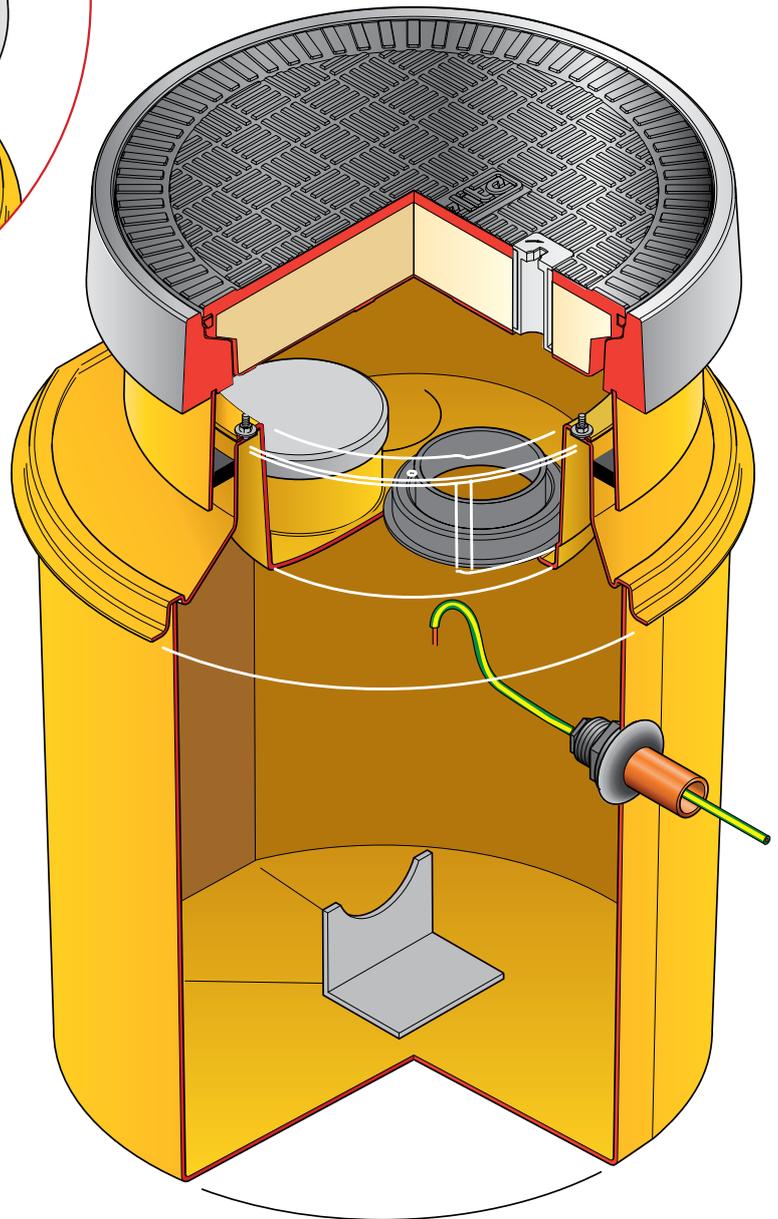



THE SPILL CONTAINER AND AND CORBEL CONTAIN
A SPECIAL INSET SECTION TO ALLOW FOR EASY
ACCESS OF GOOSENECK DELIVERY HOSES

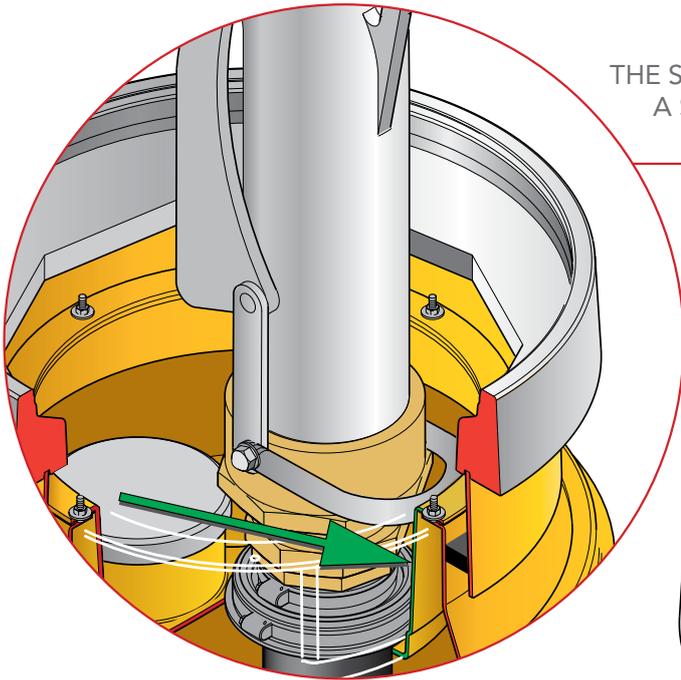

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump and a sealed secondary spill container. 450mm dia flat sealed cover and frame. Includes PSB-110-PS 110mm dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




FIBRELITE 
PART OF OPW A DOVER COMPANY

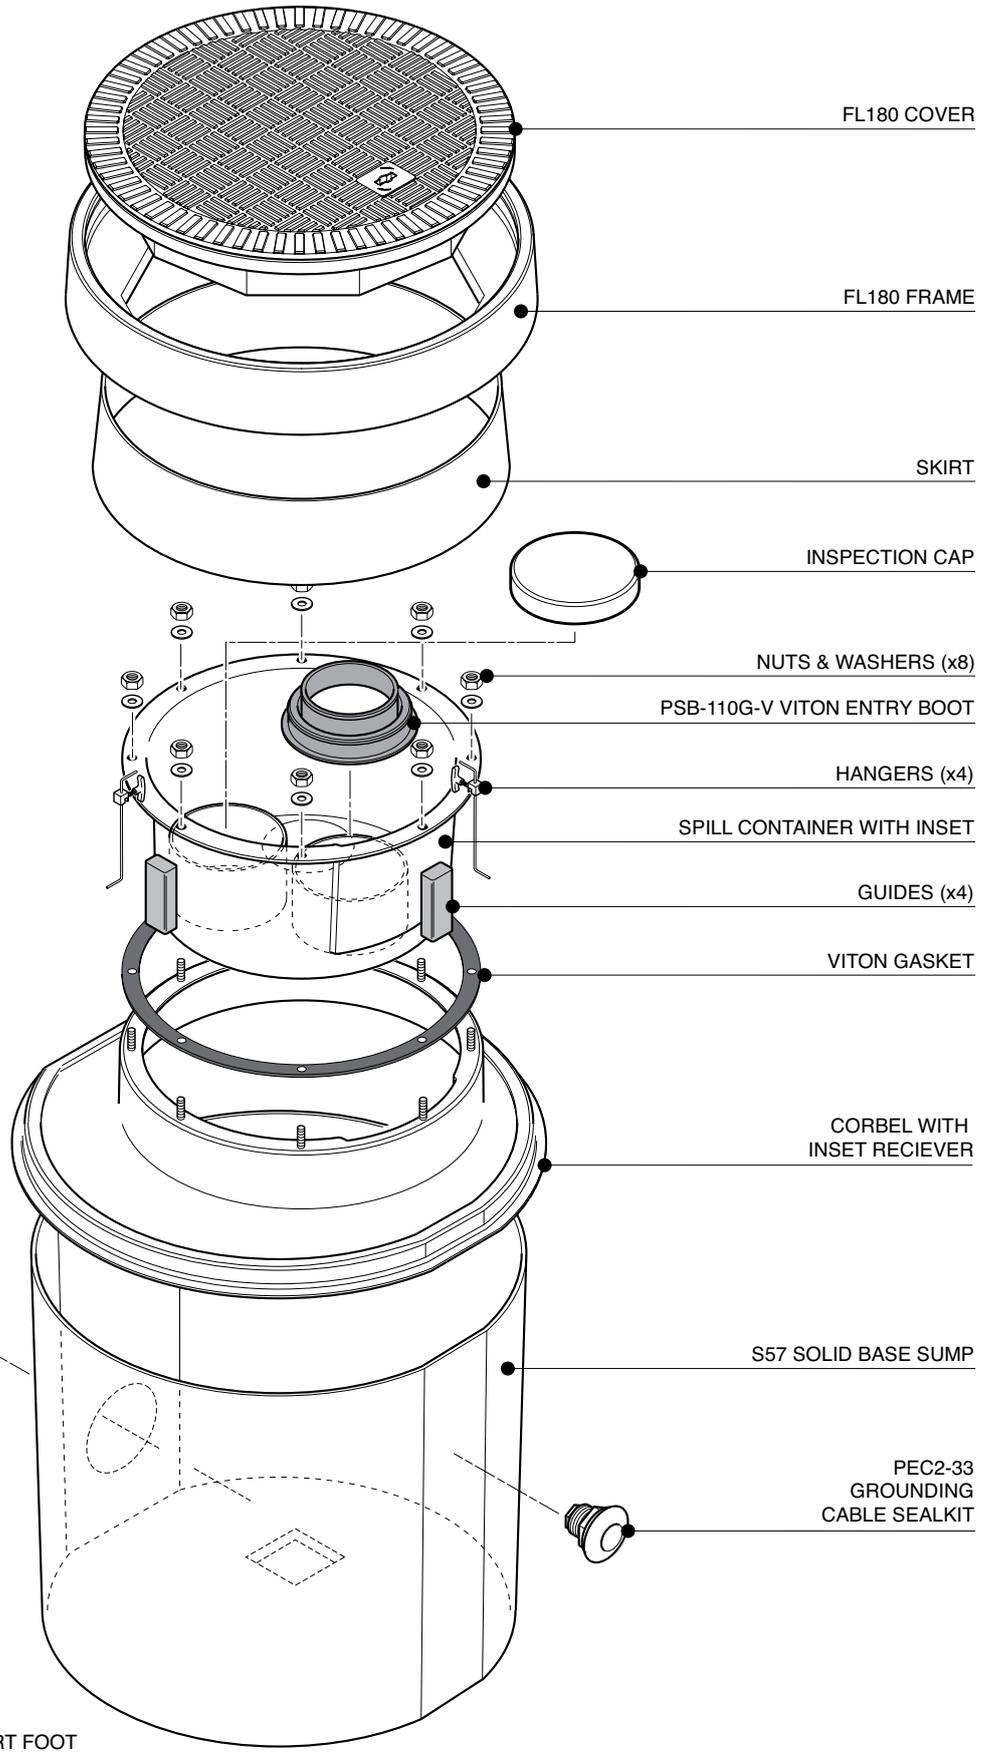

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump and a sealed secondary spill container. 450mm dia flat sealed cover and frame. Includes PSB-110-PS 110mm dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



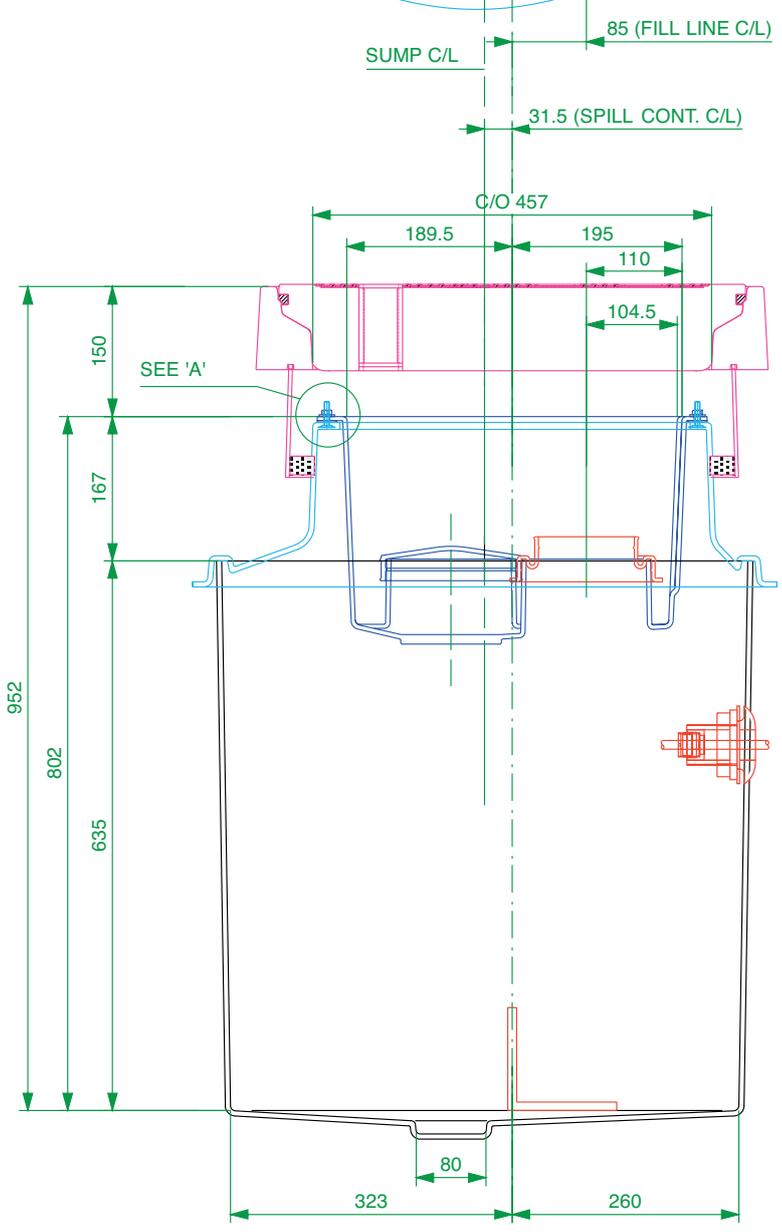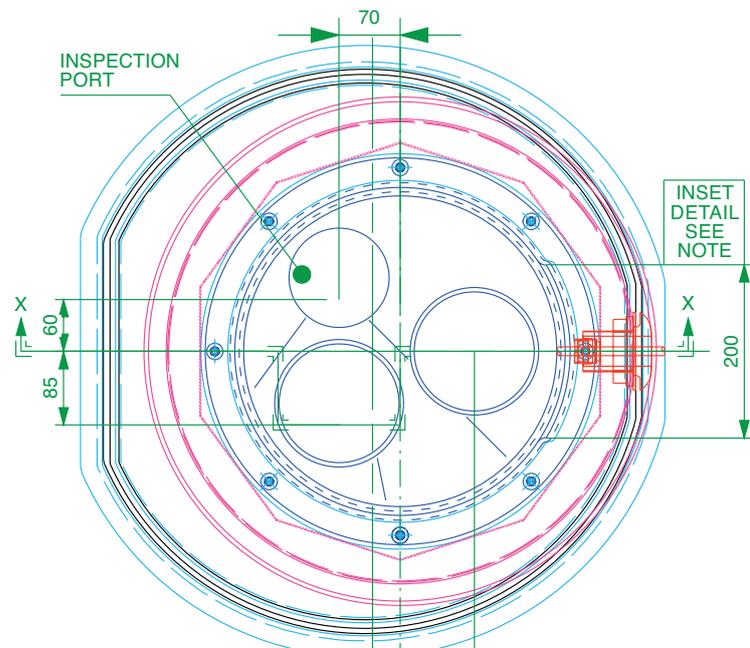

NOTE:

THE SPILL CONTAINER AND CORBEL CONTAIN A SPECIAL INSET SECTION TO ALLOW FOR EASY ACCESS OF GOOSENECK DELIVERY HOSES

Spill Containment Capacity = 22 Litres

SECTION X - X

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump and a sealed secondary spill container. 450mm dia flat sealed cover and frame. Includes PSB-110-PS 110mm dia. spill tray fill riser sealkit and grounding cable sealkit.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



VERY IMPORTANT
 OUTER EDGE "A" OF FRAME SET 5 - 10MM
 ABOVE GENERAL FORECOURT AREA WITH
 CONCRETE RAMPED AWAY OVER 300MM.


TYPICAL INSTALLATION

CONCRETE

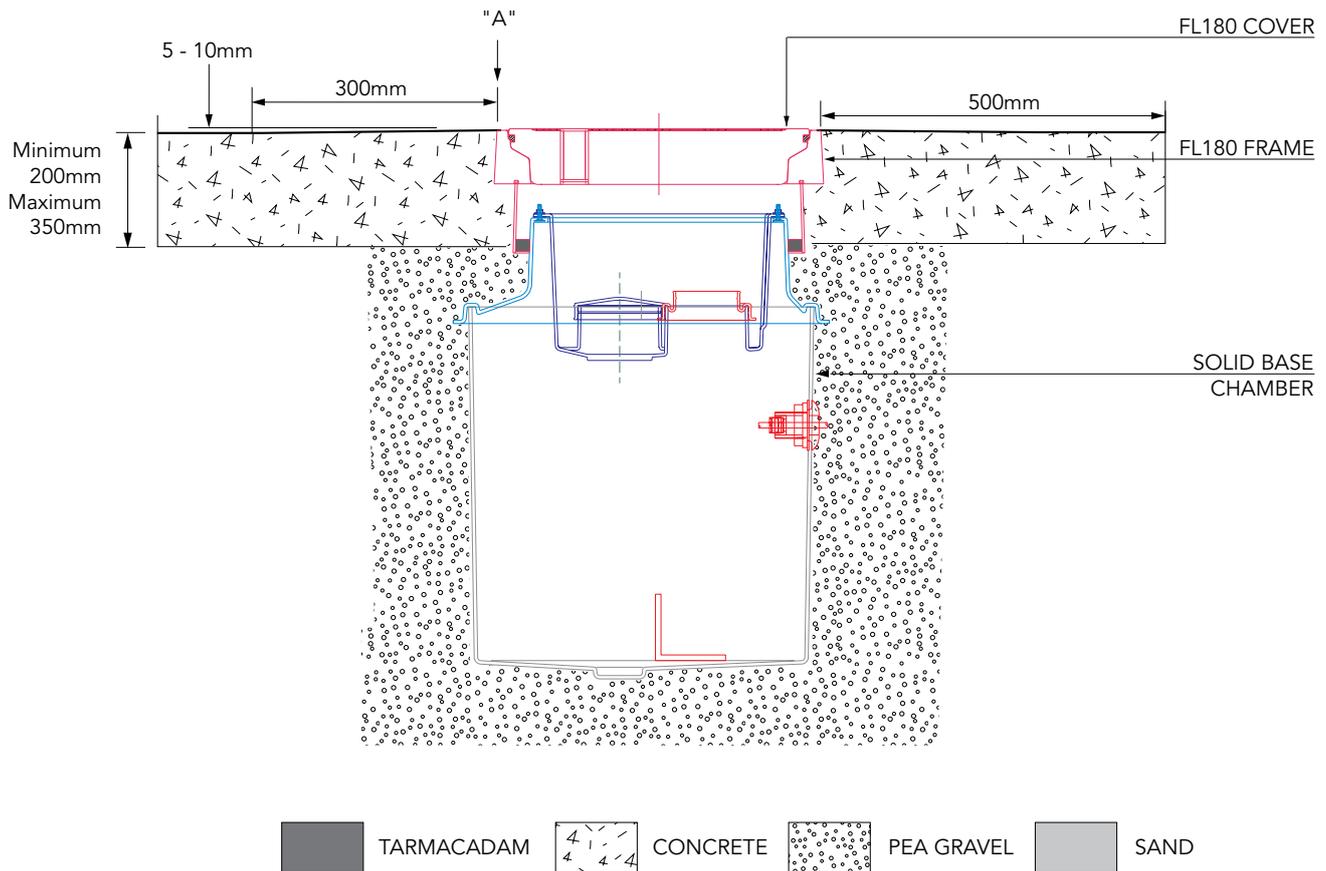


ALTERNATIVE INSTALLATION ADVICE

TARMACADAM

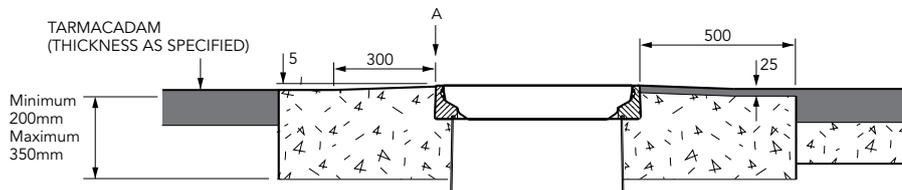

SETTS

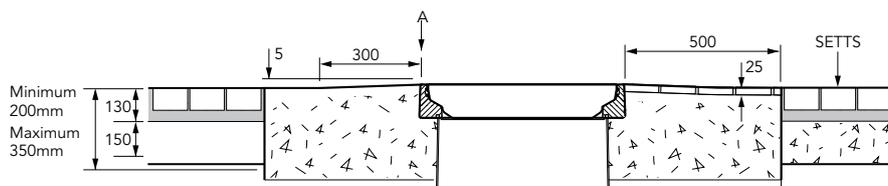

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump and a sealed secondary spill container. 450mm dia flat sealed cover and frame. Includes PSB-110-PS 110mm dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

