


1.2m square bolted base chamber with a corbel, internal lid, adjustable skirt and square 760mm flat sealed cover with a central dip cover. (1m square tank flange connection).

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S6-376-CD Issue: 11/06/2016 Page: 1 of 4

© Copyright

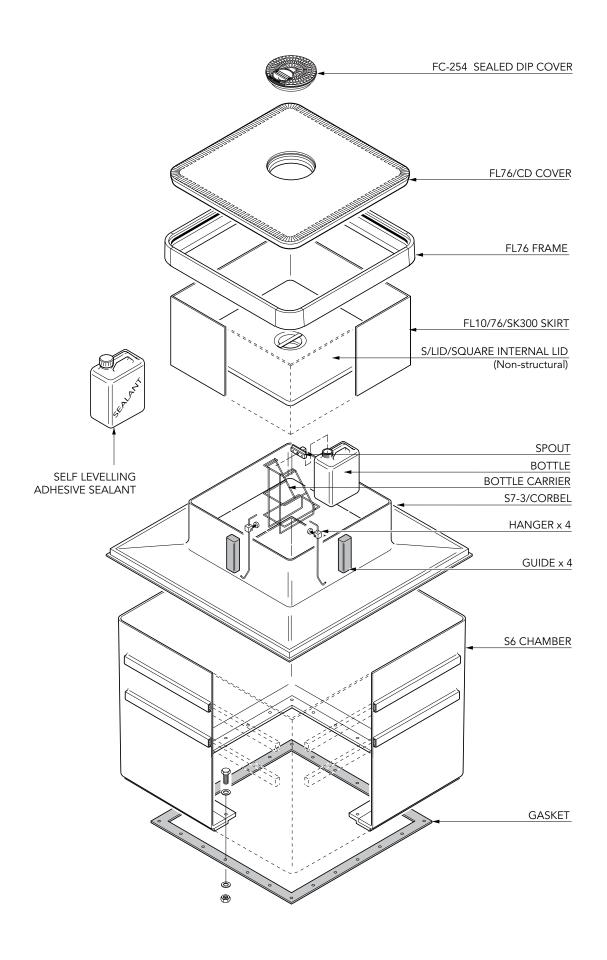



1.2m square bolted base chamber with a corbel, internal lid, adjustable skirt and square 760mm flat sealed cover with a central dip cover. (1m square tank flange connection).

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



 S6-376-CD
 Issue: 11/06/2016
 Page: 2 of 4
 © Copyright

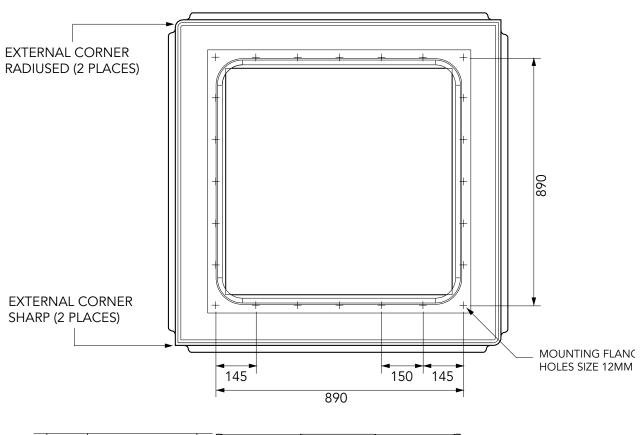

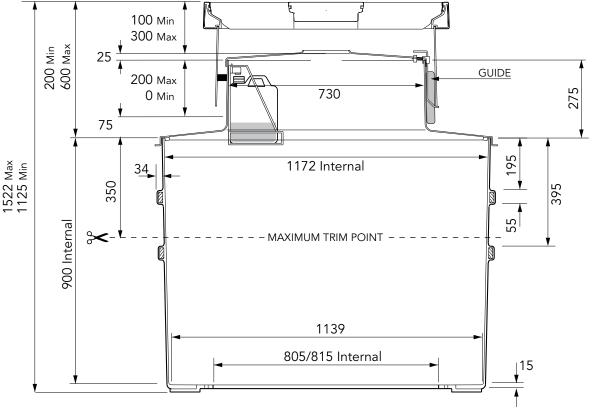

1.2m square bolted base chamber with a corbel, internal lid, adjustable skirt and square 760mm flat sealed cover with a central dip cover. (1m square tank flange connection).

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.


© Copyright

FIBRELITE


S6-376-CD Issue: 11/06/2016 Page: 3 of 4




TYPICAL INSTALLATION

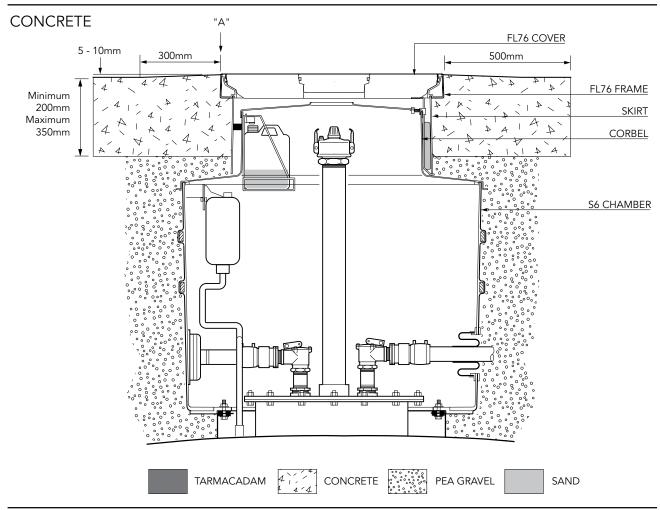

ALTERNATIVE INSTALLATION ADVICE

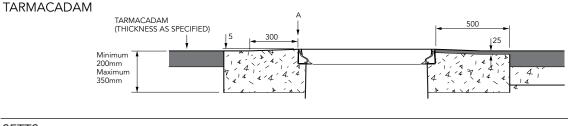



1.2m square bolted base chamber with a corbel, internal lid, adjustable skirt and square 760mm flat sealed cover with a central dip cover. (1m square tank flange connection).

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

S6-376-CD Issue: 11/06/2016 Page: 4 of 4

© Copyright