


1.2m diameter chamber with collar ring base connection, a sealed corbel, internal lid, adjustable skirt and round 900mm flat sealed cover with a removeable central cap (254mm diameter) and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



**FIBRELITE**   
 PART OF OPW A DOVER COMPANY

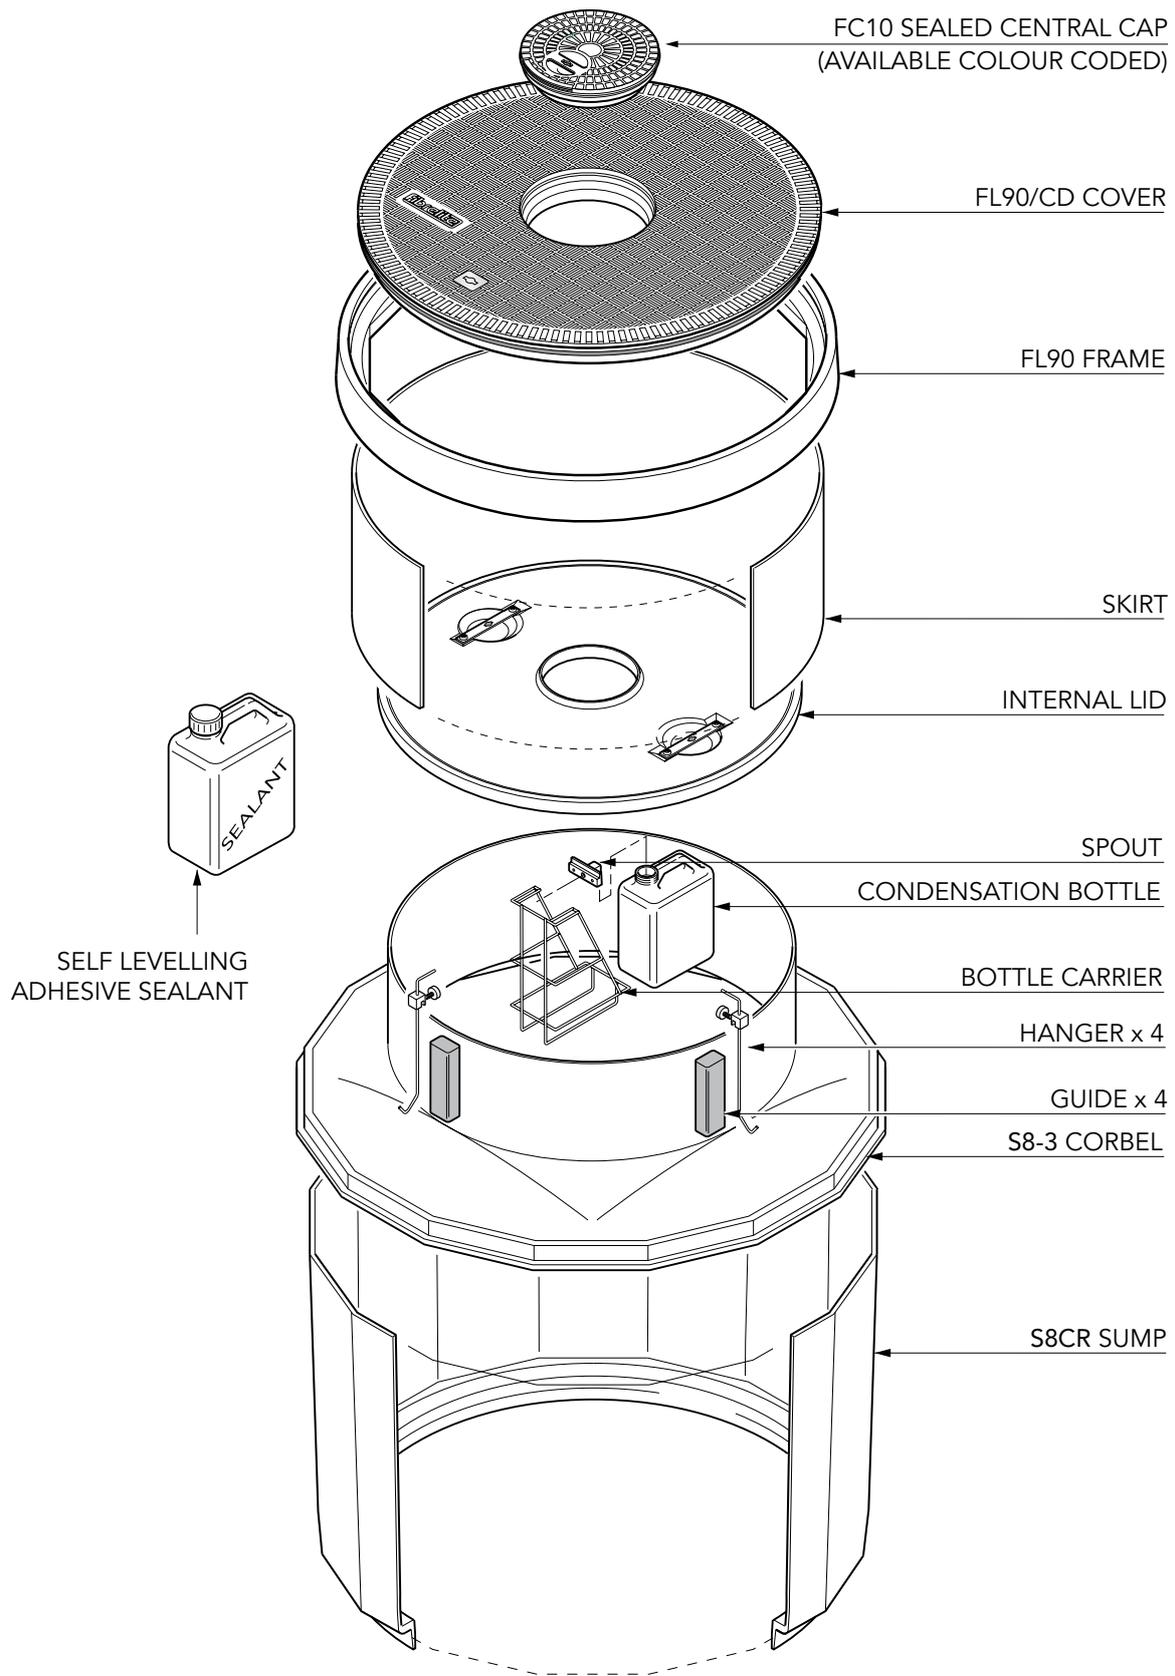

1.2m diameter chamber with collar ring base connection, a sealed corbel, internal lid, adjustable skirt and round 900mm flat sealed cover with a removeable central cap (254mm diameter) and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOWDER COMPANY

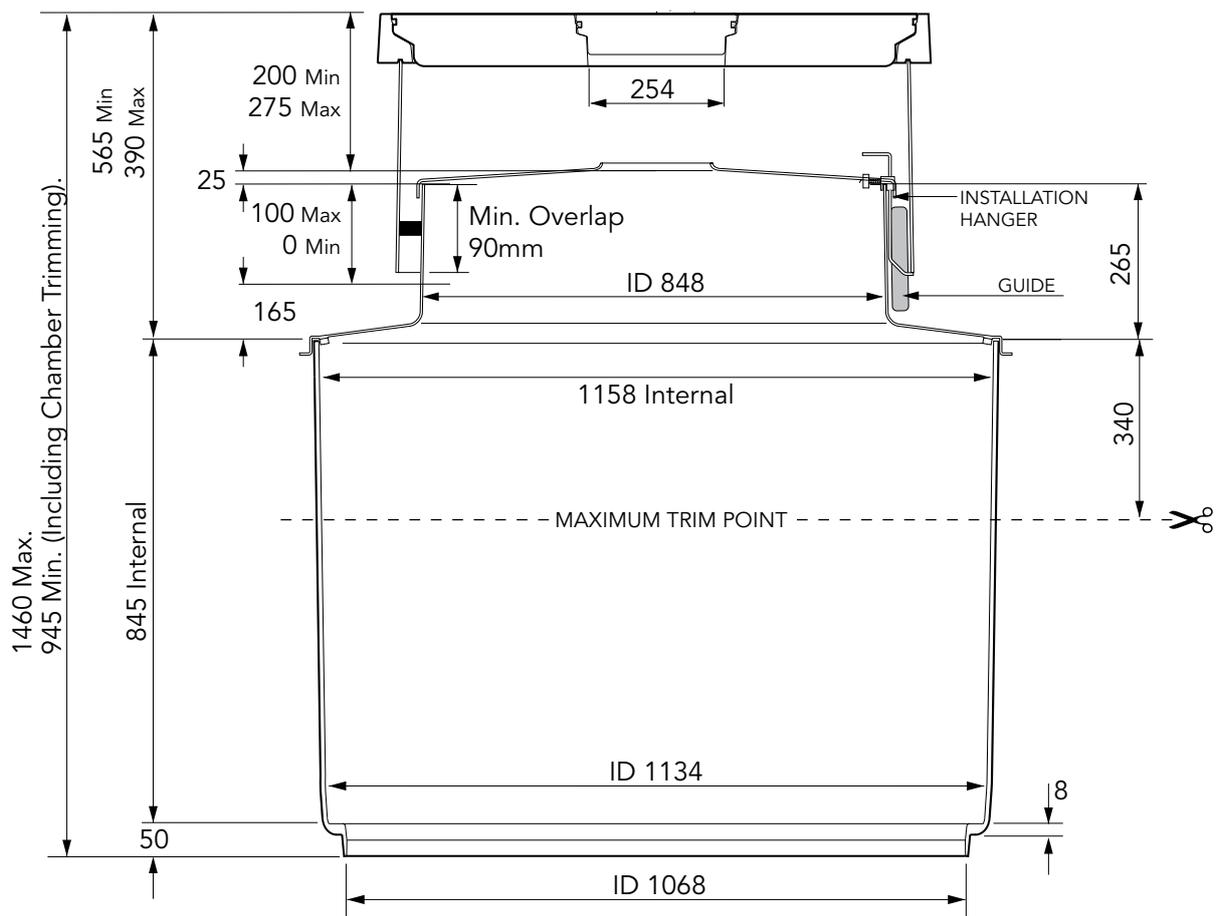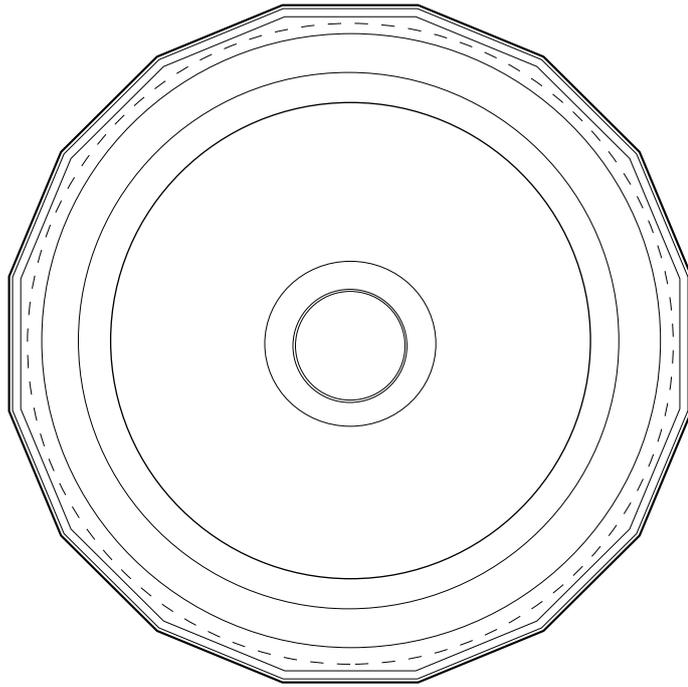


1.2m diameter chamber with collar ring base connection, a sealed corbel, internal lid, adjustable skirt and round 900mm flat sealed cover with a removeable central cap (254mm diameter) and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
 PART OF OPW A DOVER COMPANY


TYPICAL INSTALLATION

CONCRETE

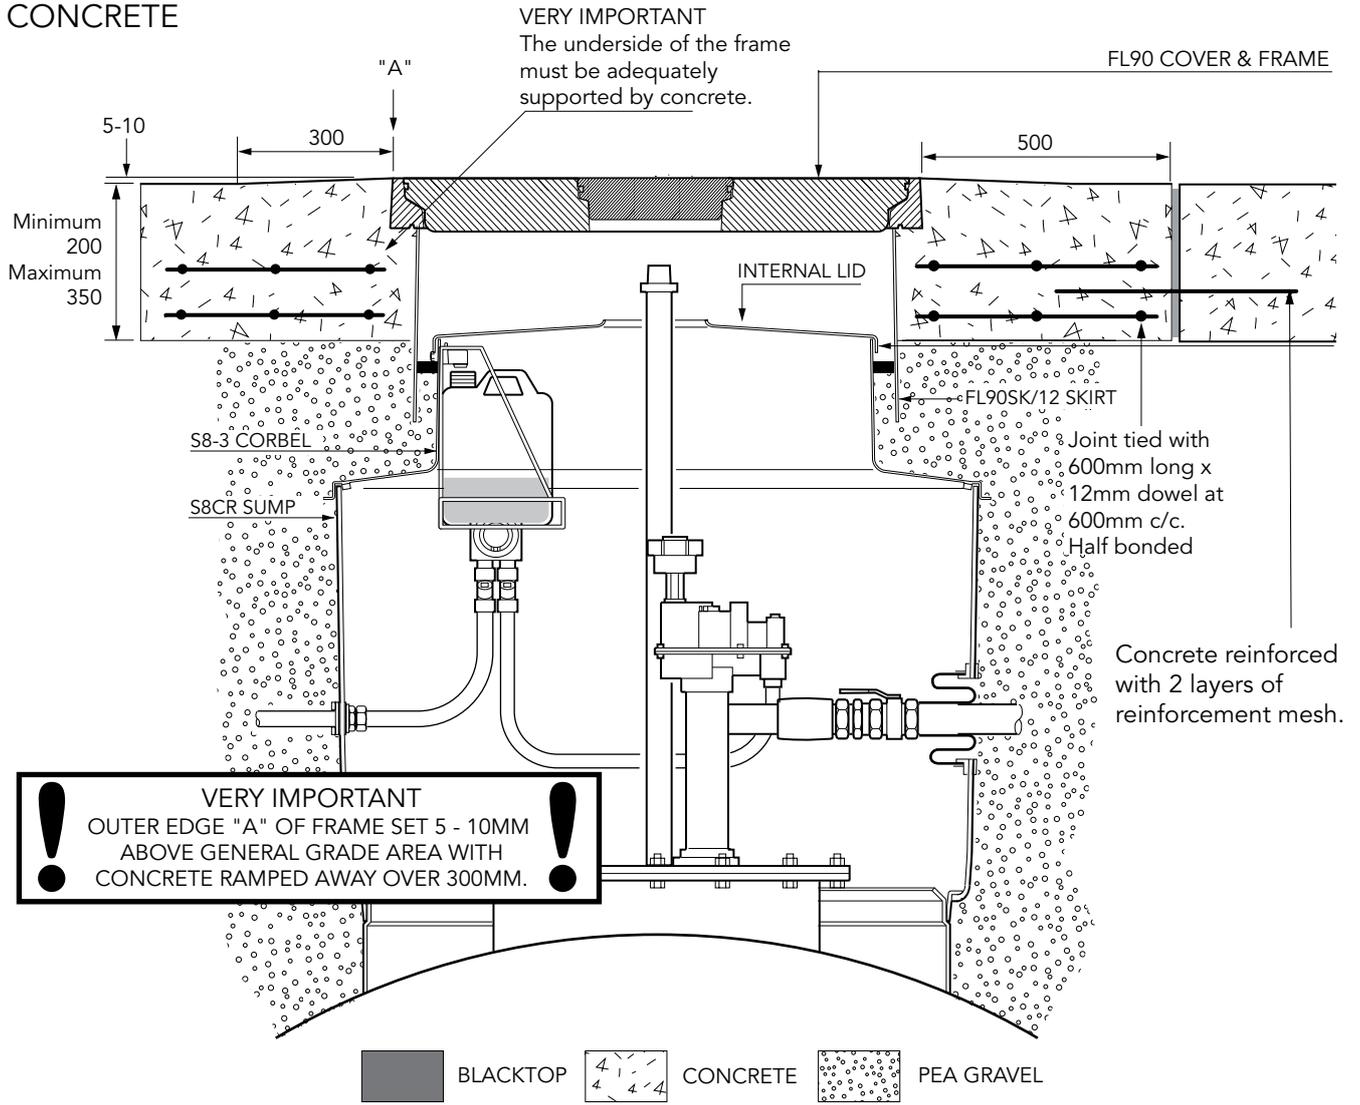

ALTERNATIVE INSTALLATION ADVICE

BLACKTOP

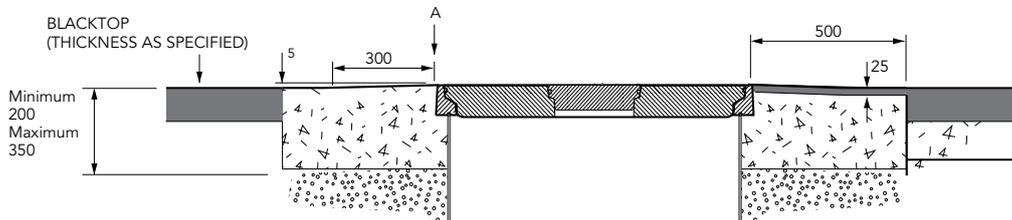

1.2m diameter chamber with collar ring base connection, a sealed corbel, internal lid, adjustable skirt and round 900mm flat sealed cover with a removeable central cap (254mm diameter) and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

