


1.2m diameter chamber with collar ring base connection, a sealed corbel, watertight platform, adjustable skirt and round 900mm flat sealed cover and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S8CR-390-WT Issue: 11/06/2016 Page: 1 of 4

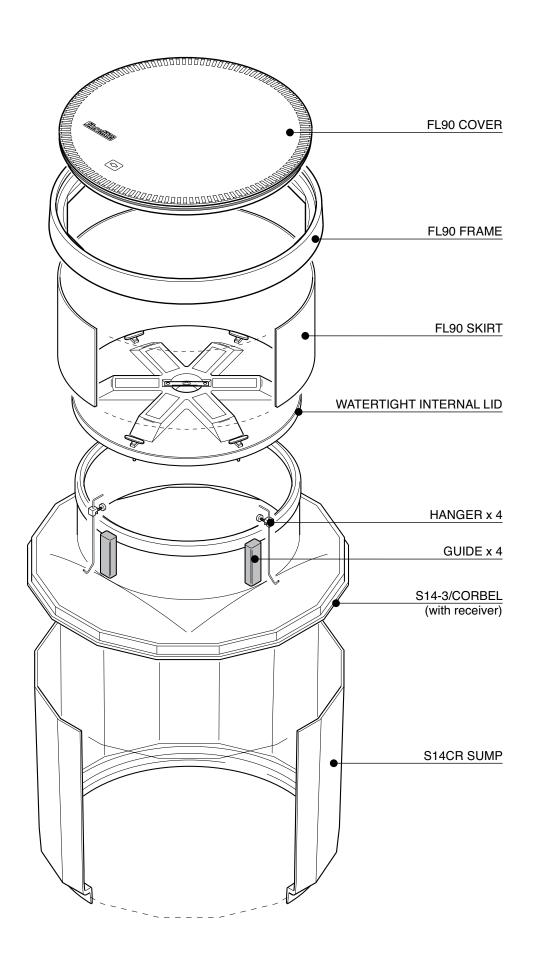


1.2m diameter chamber with collar ring base connection, a sealed corbel, watertight platform, adjustable skirt and round 900mm flat sealed cover and composite frame.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S8CR-390-WT Issue: 11/06/2016 Page: 2 of 4




TYPICAL INSTALLATION

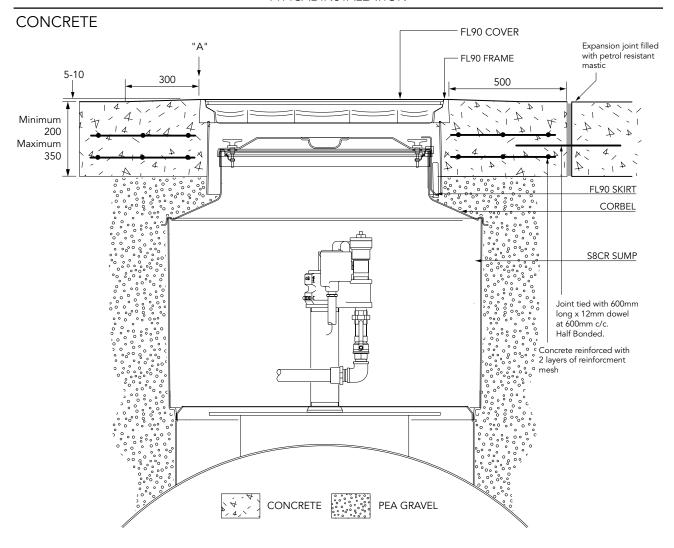



S8CR-390-WT Issue: 11/06/2016 Page: 3 of 4

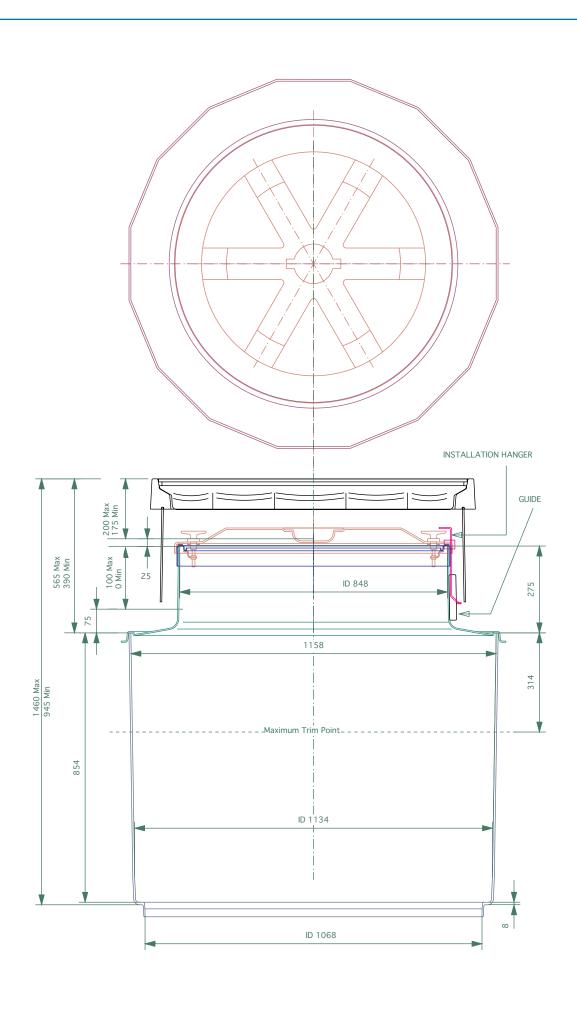

1.2m diameter chamber with collar ring base connection, a sealed corbel, watertight platform, adjustable skirt and round 900mm flat sealed cover and composite frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



S8CR-390-WT Issue: 11/06/2016

Page: 4 of 4