

F105 COVER

SEAL


F105 FRAME



40" diameter watertight flat sealed cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

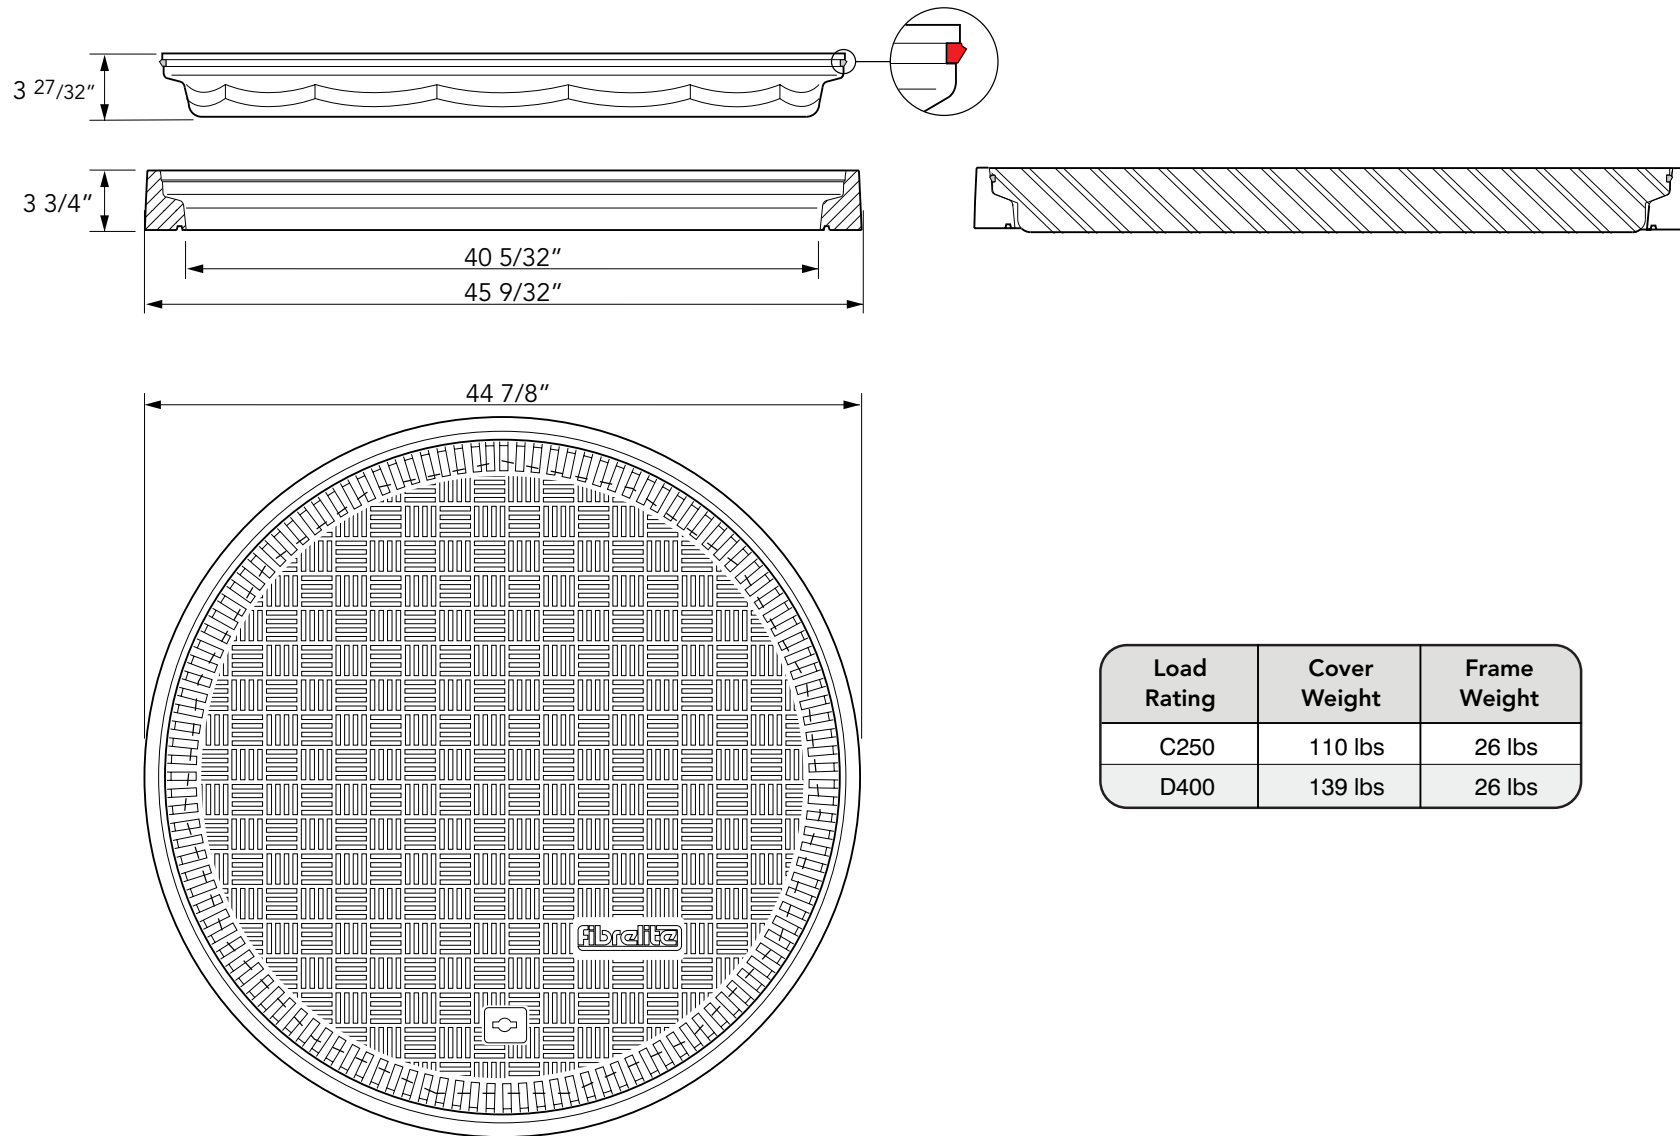

Load Rating	Cover Weight	Frame Weight
C250	110 lbs	26 lbs
D400	139 lbs	26 lbs

40" diameter watertight flat sealed cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



## CONCRETE


### VERY IMPORTANT

FRAMES MUST BE INSTALLED FLUSH WITH FINISHED GRADE OR SET SLIGHTLY BELOW FINISHED GRADE TO PROTECT FROM SNOWPLOW DAMAGE

**VERY IMPORTANT**  
 To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame.


**VERY IMPORTANT**  
 The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastics.

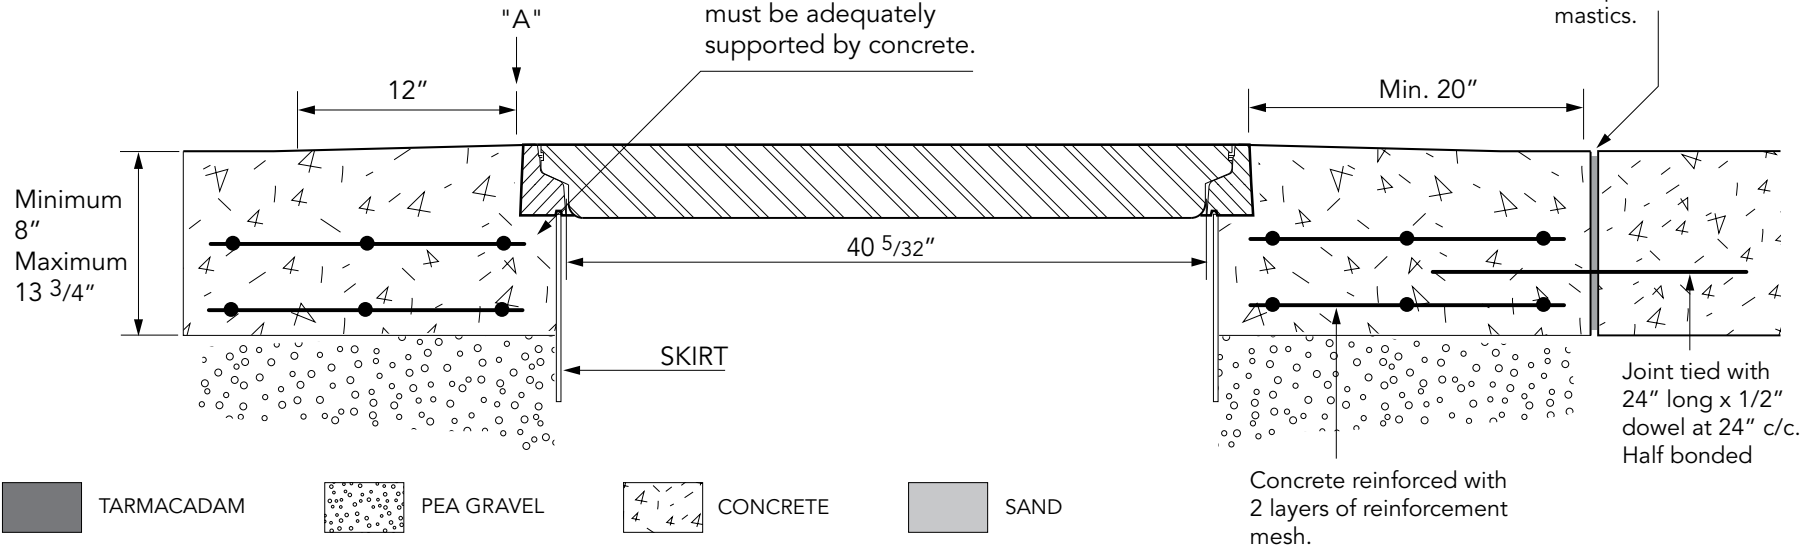


Concrete reinforced with 2 layers of reinforcement mesh.

## TARMACADAM

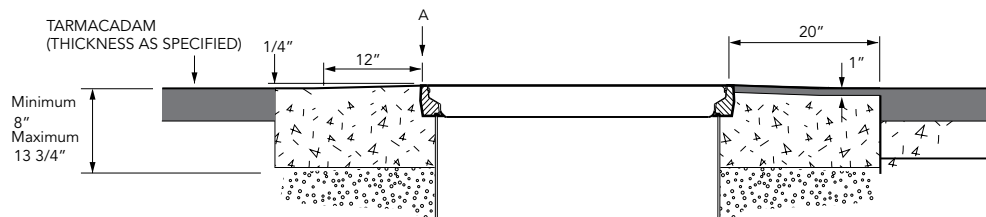

## SETTS

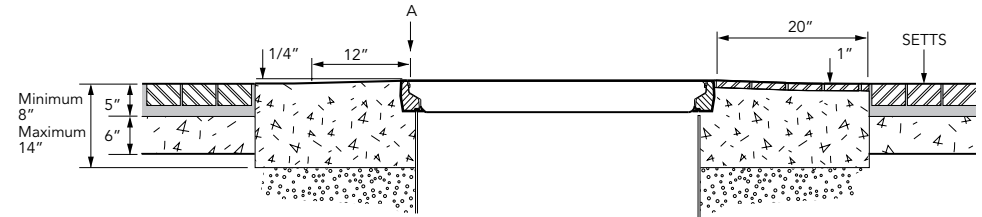

40" diameter watertight flat sealed cover with composite frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**  
 PART OF OPW A DOVER COMPANY