
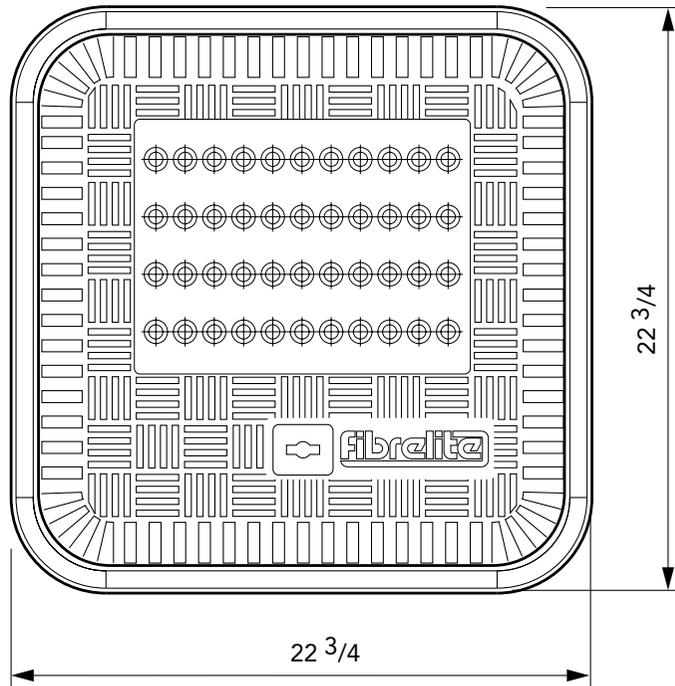
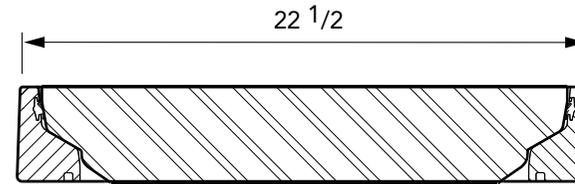


18" x 18" square vented, flat composite cover with aluminum frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

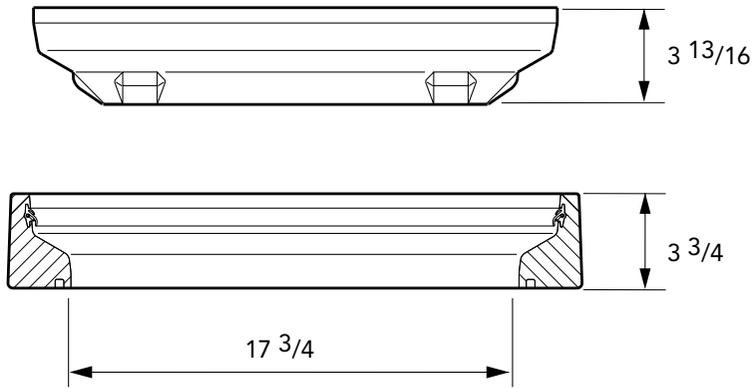

18" x 18" square vented, flat composite cover with aluminum frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
 PART OF OPW A DOVER COMPANY


# CONCRETE

## VERY IMPORTANT

□□A□□□□□□□□ □□□□□□A□□□□□□□□□□  
 □□□□□□□□□□□□□□A□□□□□□□□□□□□□□  
 □□□□□□□□□□□□□□A□□□□□□□□□□□□□□  
 □□□□□□□□□□□□□□A□□□□

**VERY IMPORTANT**

! To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame. !

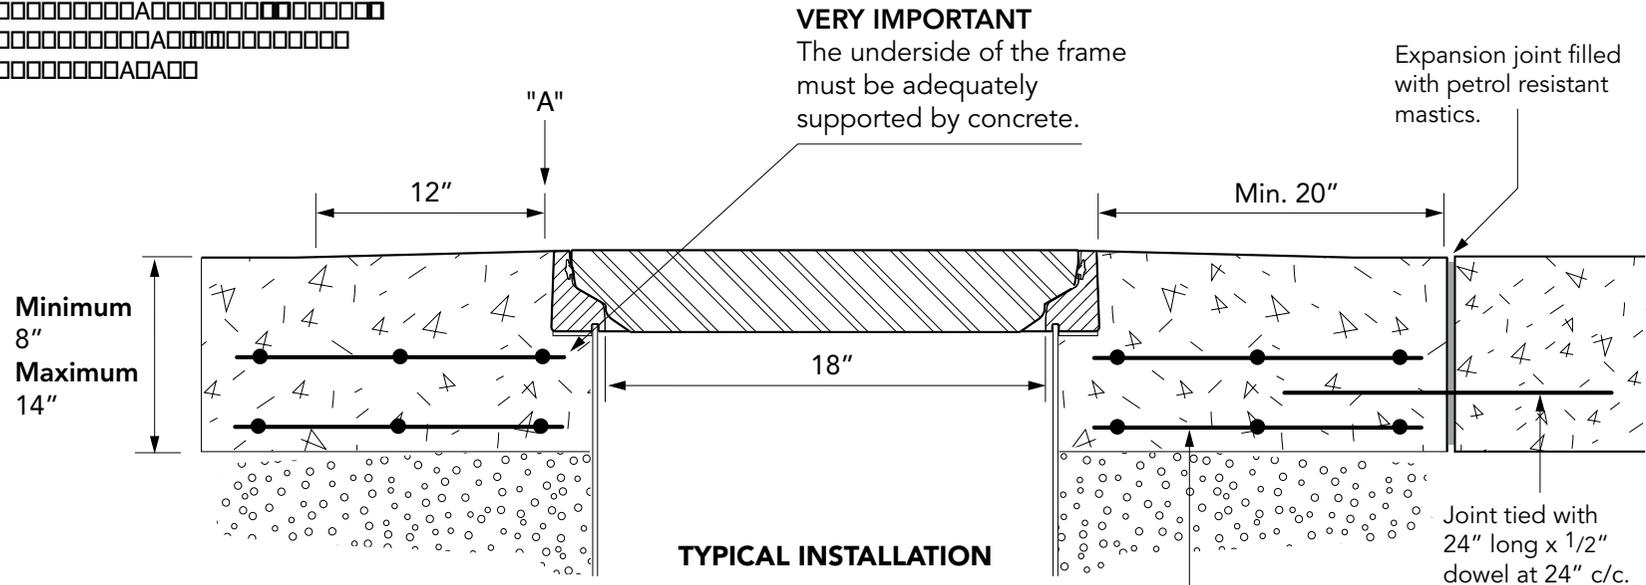


TARMACADAM   
  PEA GRAVEL   
  CONCRETE   
  SAND


Concrete reinforced with 2 layers of reinforcement mesh.

Joint tied with 24" long x 1/2" dowel at 24" c/c. Half bonded.

## TARMACADAM

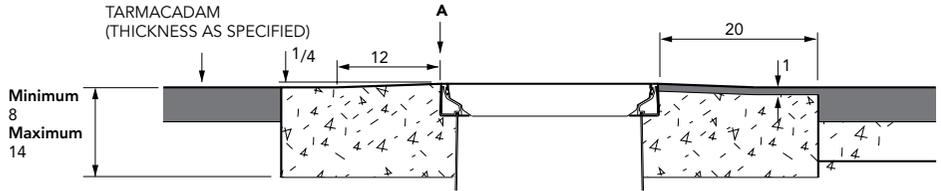

## SETTS

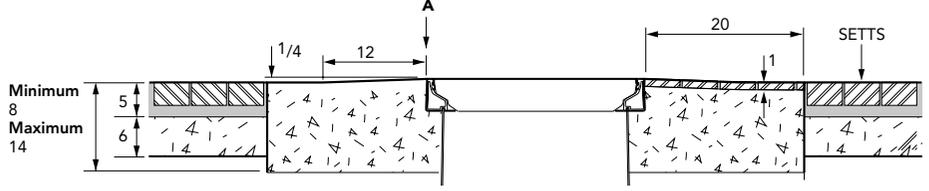

18" x 18" square vented, flat composite cover with aluminum frame. Temperature & chemical resistant. Designed for steam applications.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

