



24" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

 FL60
 Issue: 07/12/2023
 Page: 1 of 3
 © Copyright

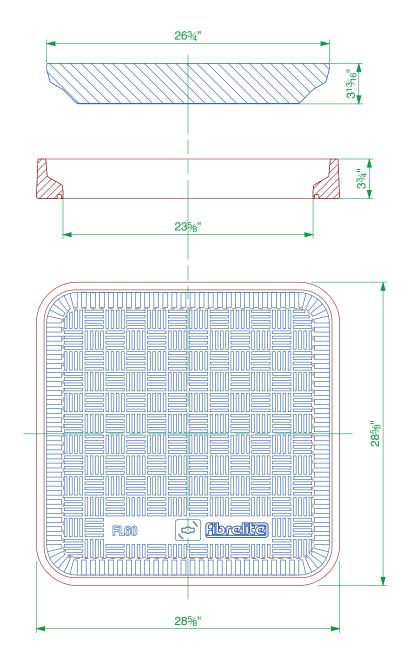



FIBRELITE COVER TYPE	LOAD RATING	TEST LOAD	POUNDS/ FORCE	COVER WEIGHT
Light Duty (LD)	B125	125 kN	28,000	26.5 lbs
Standard Duty (SD)	C250/H20	250 kN	56,000	44.1 lbs
Heavy Duty (HD)	D400/H25	400 kN	89,000	50.7 lbs


24" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE PART OF OPW A DOVER COMPANY

 FL60
 Issue: 07/12/2023
 Page: 2 of 3
 © Copyright

CONCRETE

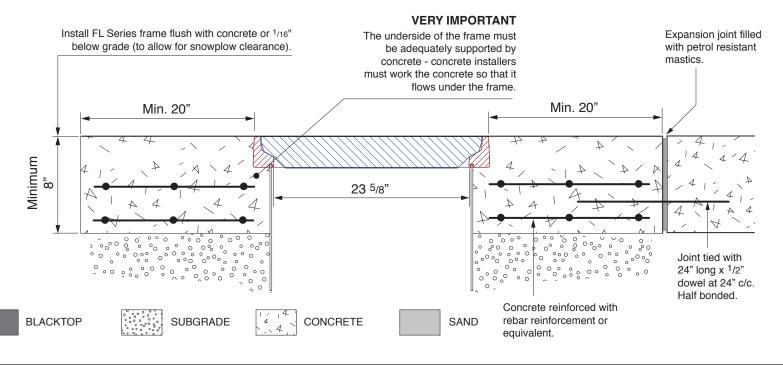

BLACKTOP (THICKNESS AS SPECIFIED) Minimum 8" Maximum 13 ¾" PAVING STONES / BRICKWORK Minimum 8" Maximum 13 ¾" Maximum 14 ¾" Maximum 15 ¾

24" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



FL60 Issue: 07/12/2023 Page: 3 of 3 © Copyright