

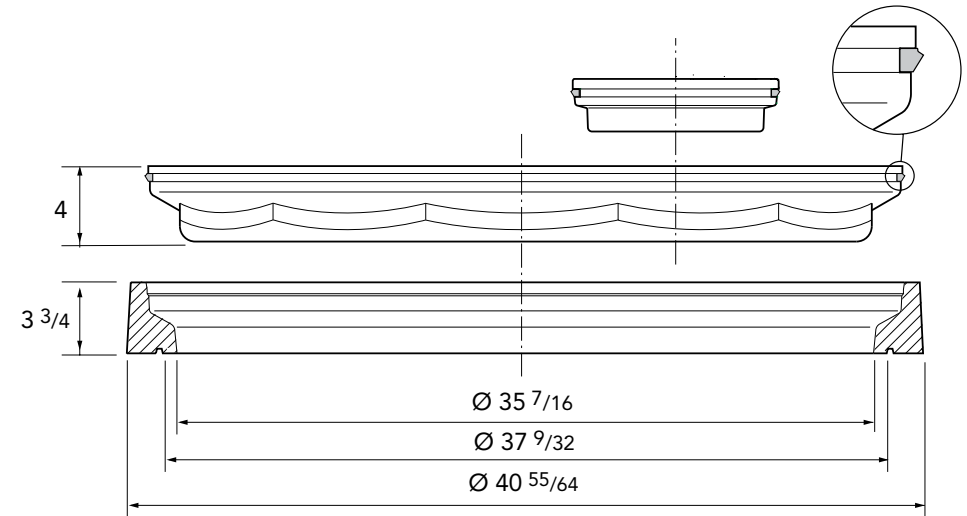
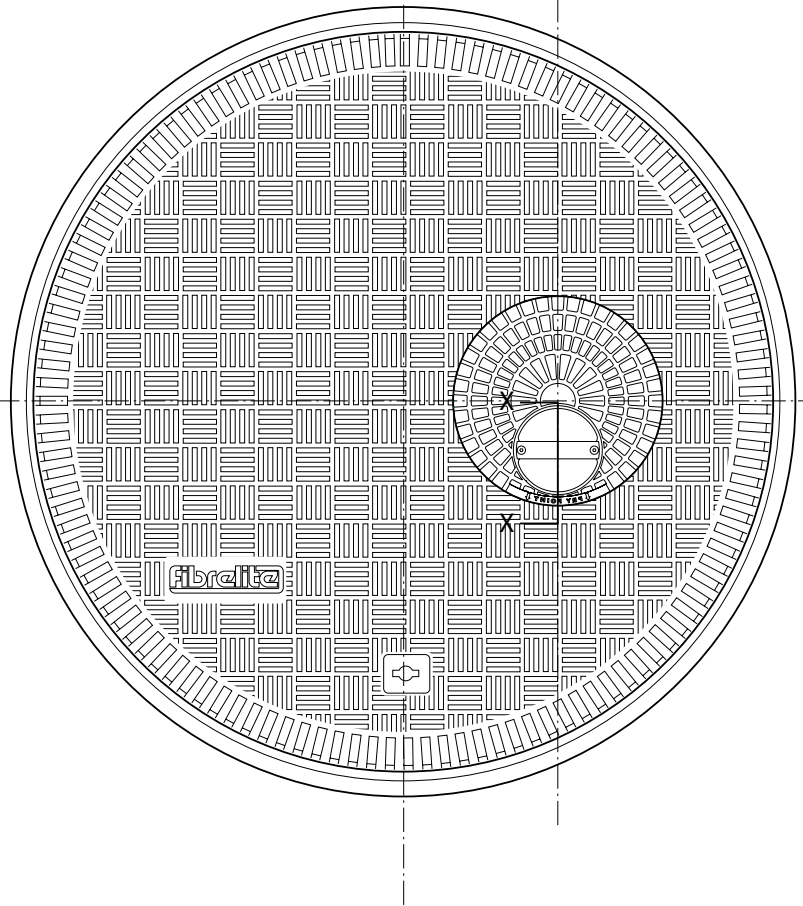


36" dia. watertight flat sealed composite cover and frame, with removable offset port cap (10" dia.)

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A  DOVER COMPANY

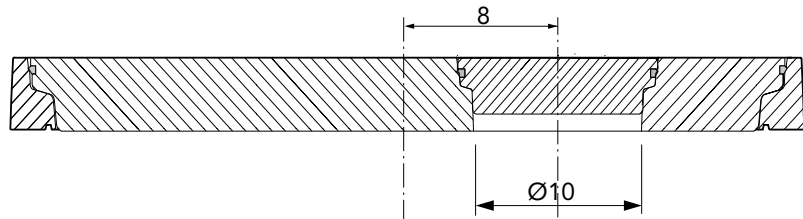

SECTION X - X
HANDLE BOWL

Load Rating	Cover Weight	Frame Weight	Port Cover
SD	84 lbs	20 lbs	7 lbs
HD	106 lbs	20 lbs	7 lbs

36" dia. watertight flat sealed composite cover and frame, with removable offset port cap (10" dia.)


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.





CONCRETE

VERY IMPORTANT

OUTER EDGE 'A' OF FRAME SET 1/4" - 1/2" ABOVE GENERAL GRADE AREA WITH CONCRETE RAMPED AWAY OVER 12".

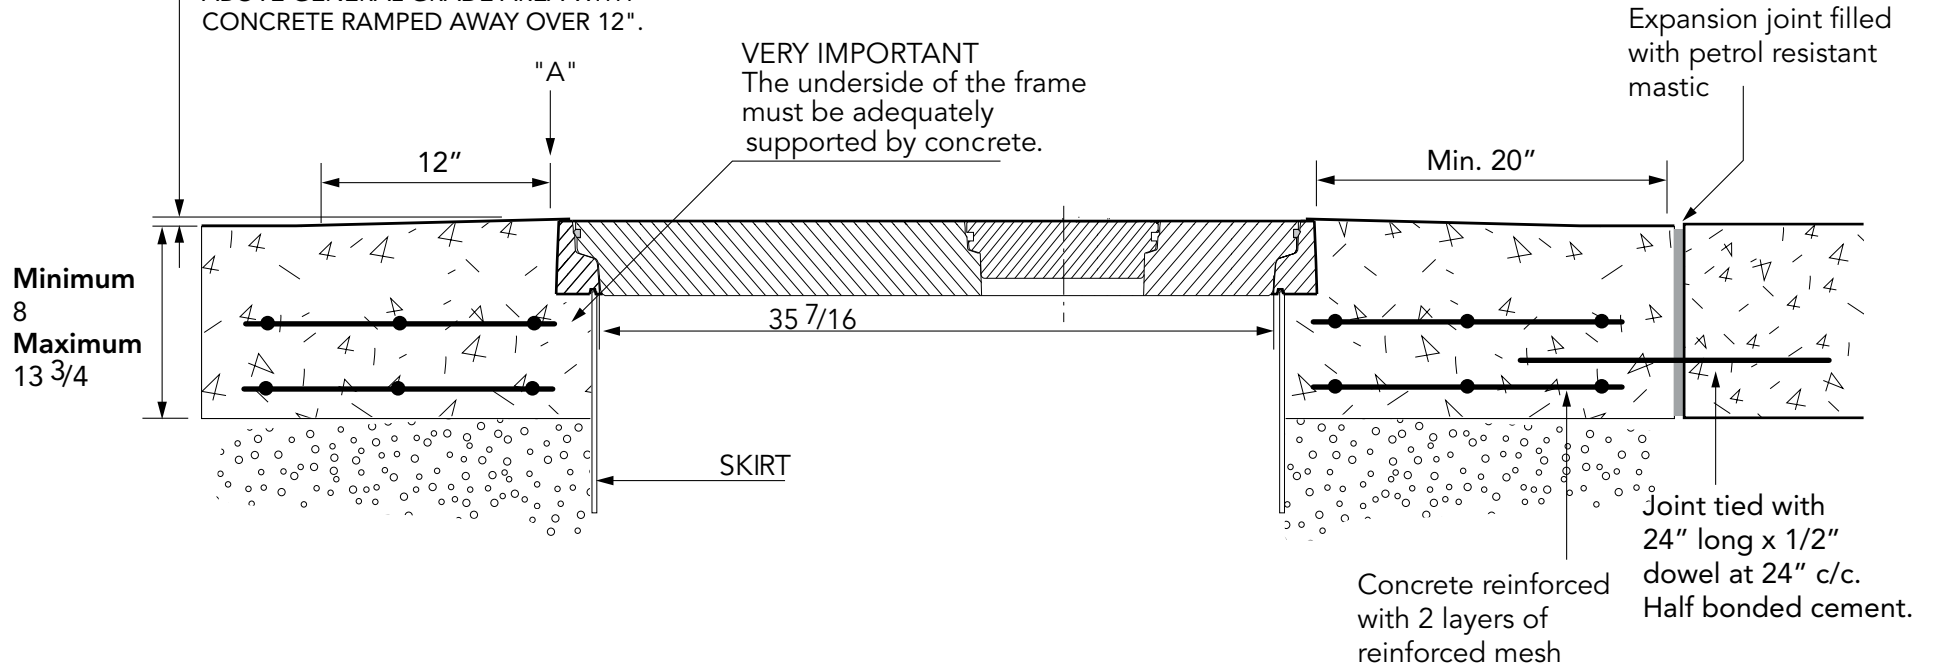

BLACKTOP (THICKNESS AS SPECIFIED)

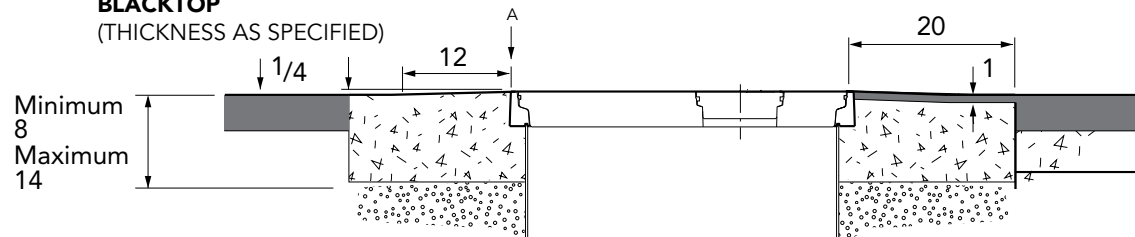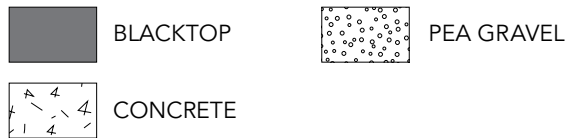

36" dia. watertight flat sealed composite cover and frame, with removable offset port cap (10" dia.)

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

