
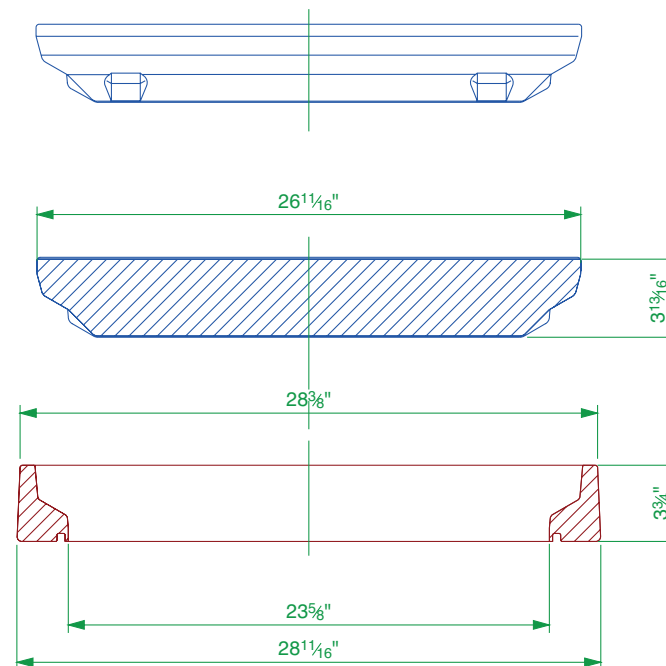


36" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF OPW A DOVER COMPANY

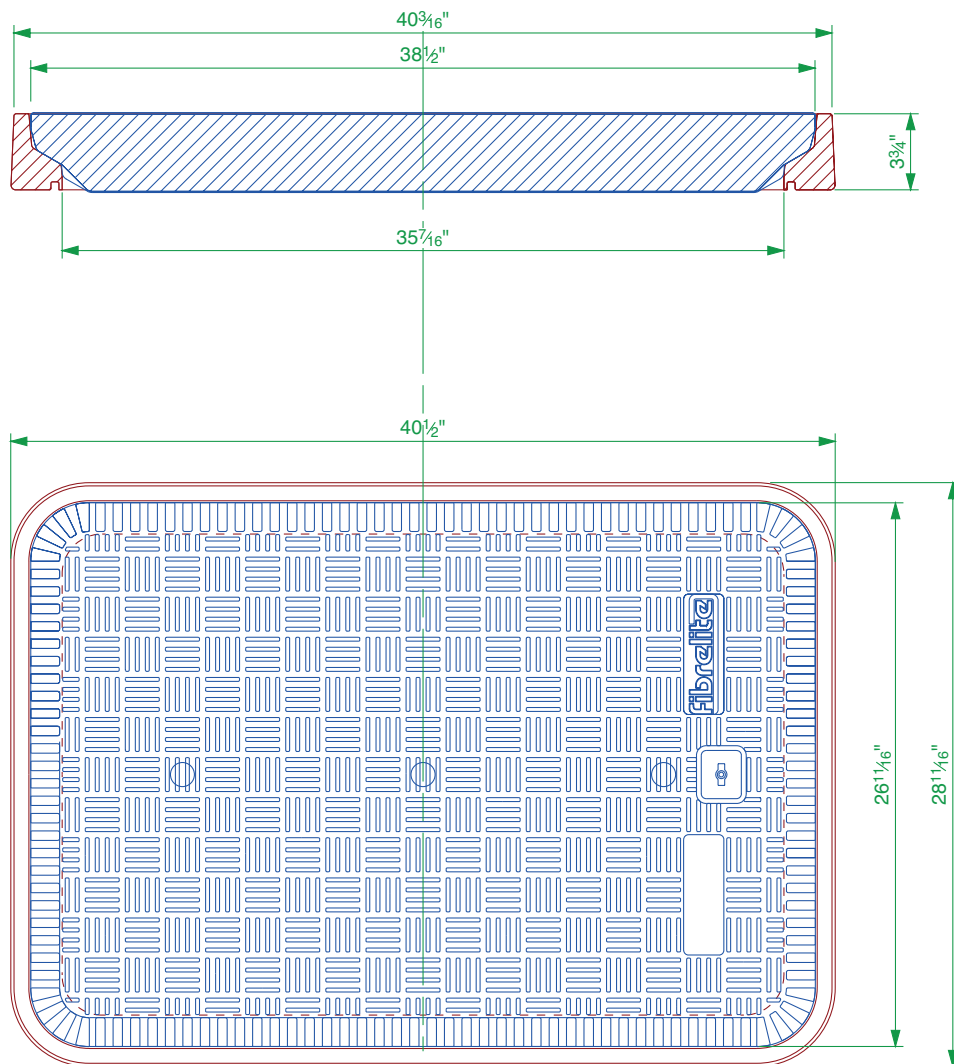

FIBRELITE COVER TYPE	LOAD RATING	TEST LOAD	POUNDS/FORCE	COVER WEIGHT
Light Duty (LD)	B125	125 kN	28,000	41.9 lbs
Standard Duty (SD)	C250/H20	250 kN	56,000	61.7 lbs
Heavy Duty (HD)	D400/H25	400 kN	89,000	84.9 lbs


36" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.


© Copyright

**FIBRELITE**   
PART OF OPW A DOVER COMPANY


## CONCRETE

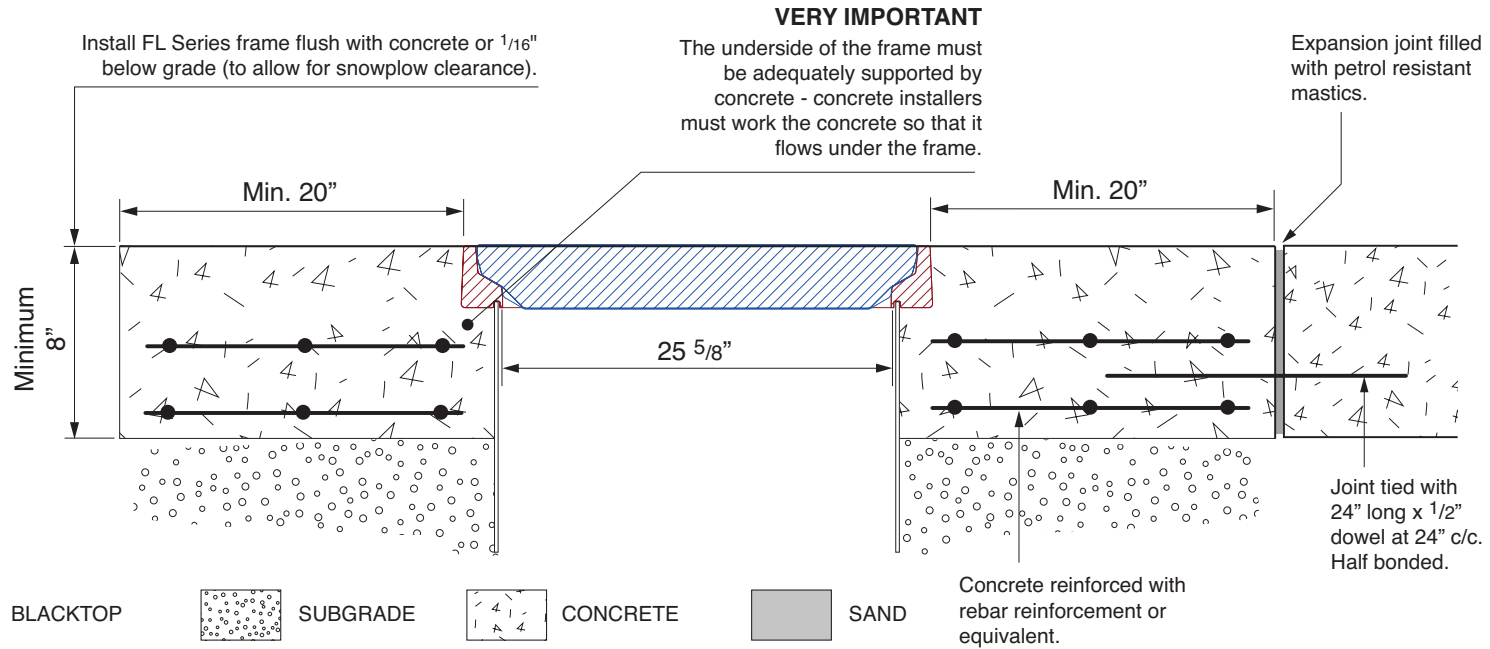

## BLACKTOP

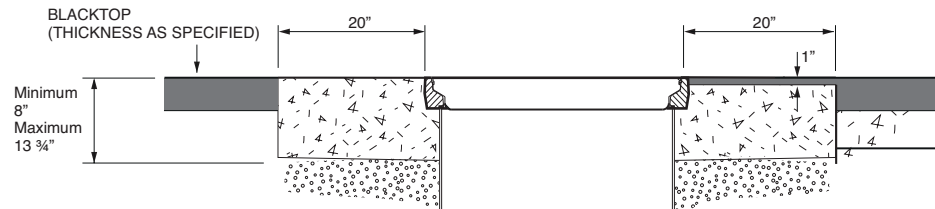

## PAVING STONES / BRICKWORK

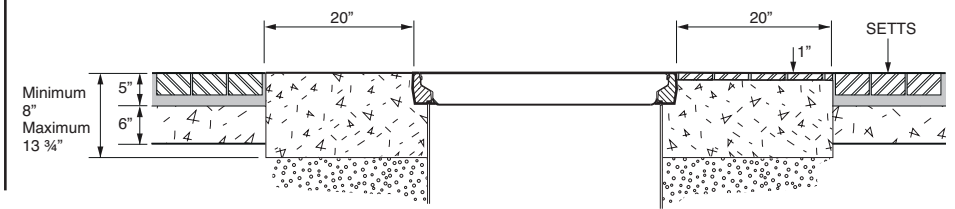

36" x 24" flat sealed composite cover with an aluminum frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

**FIBRELITE**   
PART OF CPW A DOVER COMPANY