


 54° diameter sump to fit 48° collar ring, with corbel, internal lid, adjustable skirt and round 36° flat sealed cover, corbel/skirt sealkit with condensation bottle and fixing kit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




S14CR-390-OD Issue: 27/12/2017 Page: 1 of 4

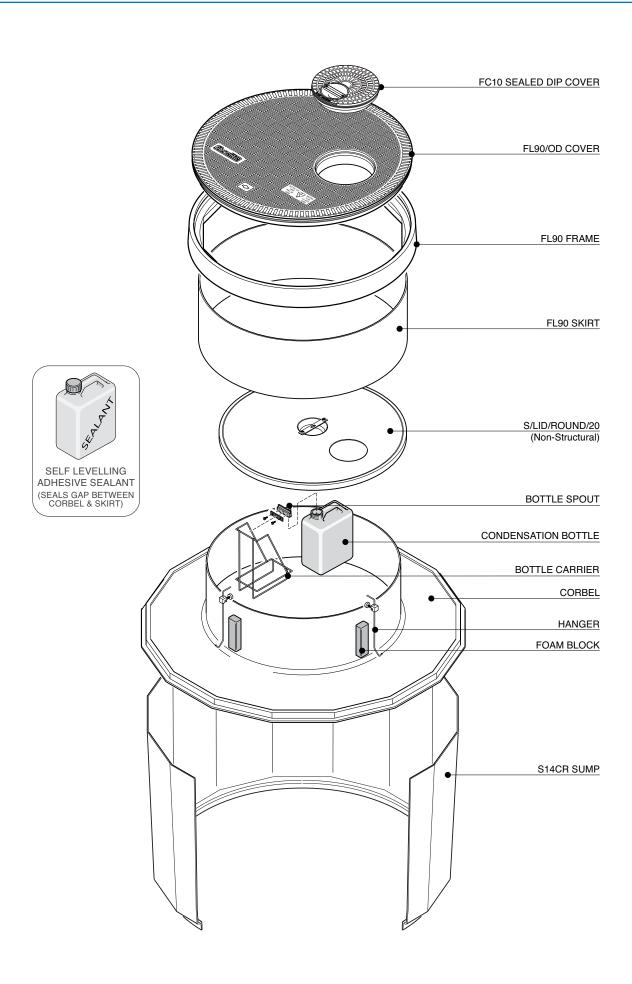

54" diameter sump to fit 48" collar ring, with corbel, internal lid, adjustable skirt and round 36" flat sealed cover, corbel/skirt sealkit with condensation bottle and fixing kit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



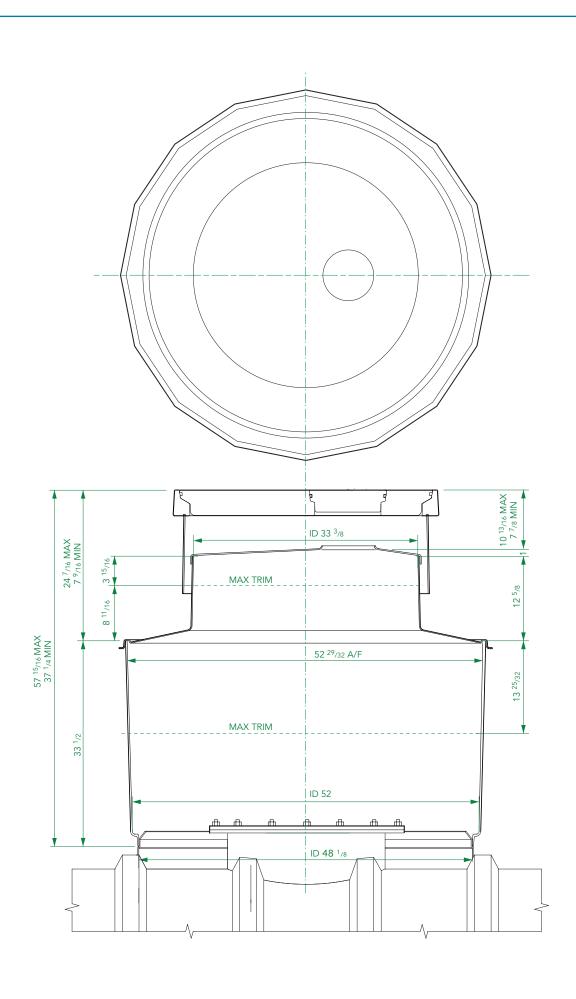

54" diameter sump to fit 48" collar ring, with corbel, internal lid, adjustable skirt and round 36" flat sealed cover, corbel/skirt sealkit with condensation bottle and fixing kit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.






VERY IMPORTANT


OUTER EDGE "A" OF FRAME SET 1/4" - 1/2'
ABOVE GENERAL GRADE AREA WITH
CONCRETE RAMPED AWAY OVER 12".



TYPICAL INSTALLATION

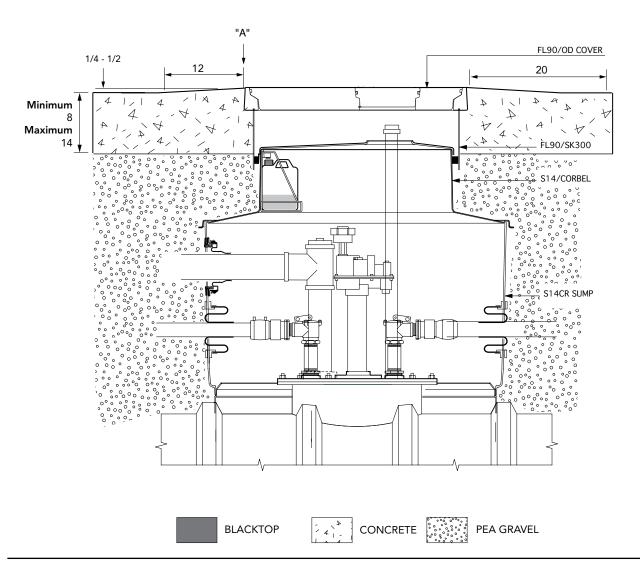

ALTERNATIVE INSTALLATION ADVICE

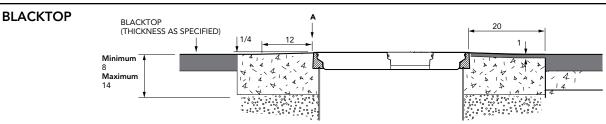

 54° diameter sump to fit 48° collar ring, with corbel, internal lid, adjustable skirt and round 36° flat sealed cover, corbel/skirt sealkit with condensation bottle and fixing kit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

S14CR-390-OD Issue: 27/12/2017 Page: 4 of 4