
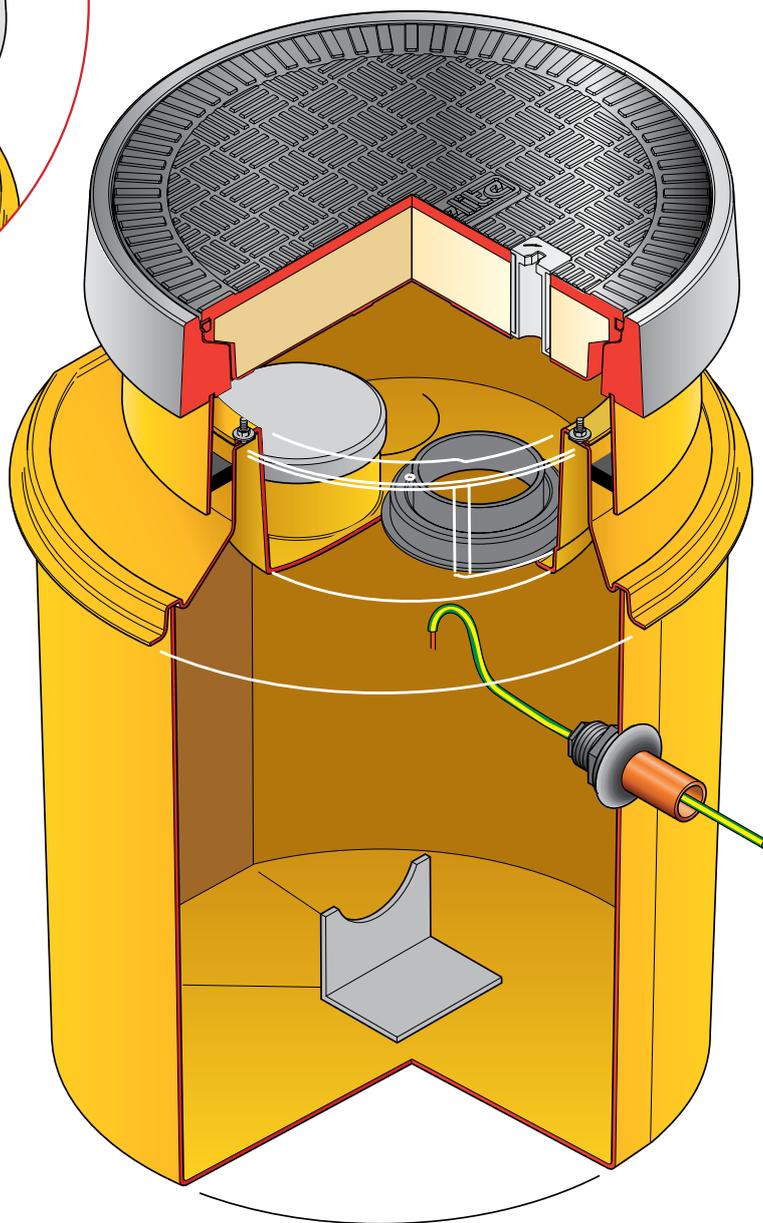



THE SPILL CONTAINER AND AND CORBEL CONTAIN
A SPECIAL INSET SECTION TO ALLOW FOR EASY
ACCESS OF GOOSENECK DELIVERY HOSES

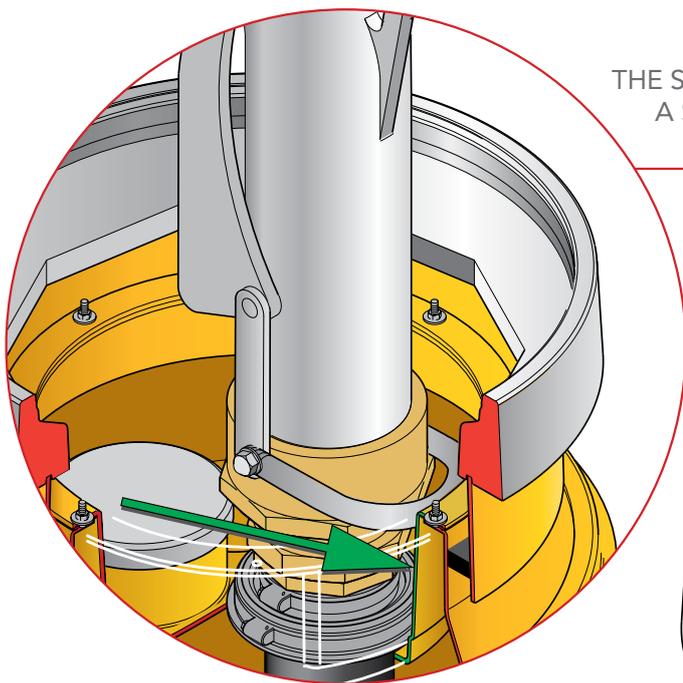

Secondary contained remote fill sump. 23" dia. x 25" deep solid base sump and a sealed secondary spill container. 18" dia flat sealed cover and frame. Includes PSB-110-PS 4 5/16" dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.


FIBRELITE 
PART OF OPW A DOVER COMPANY

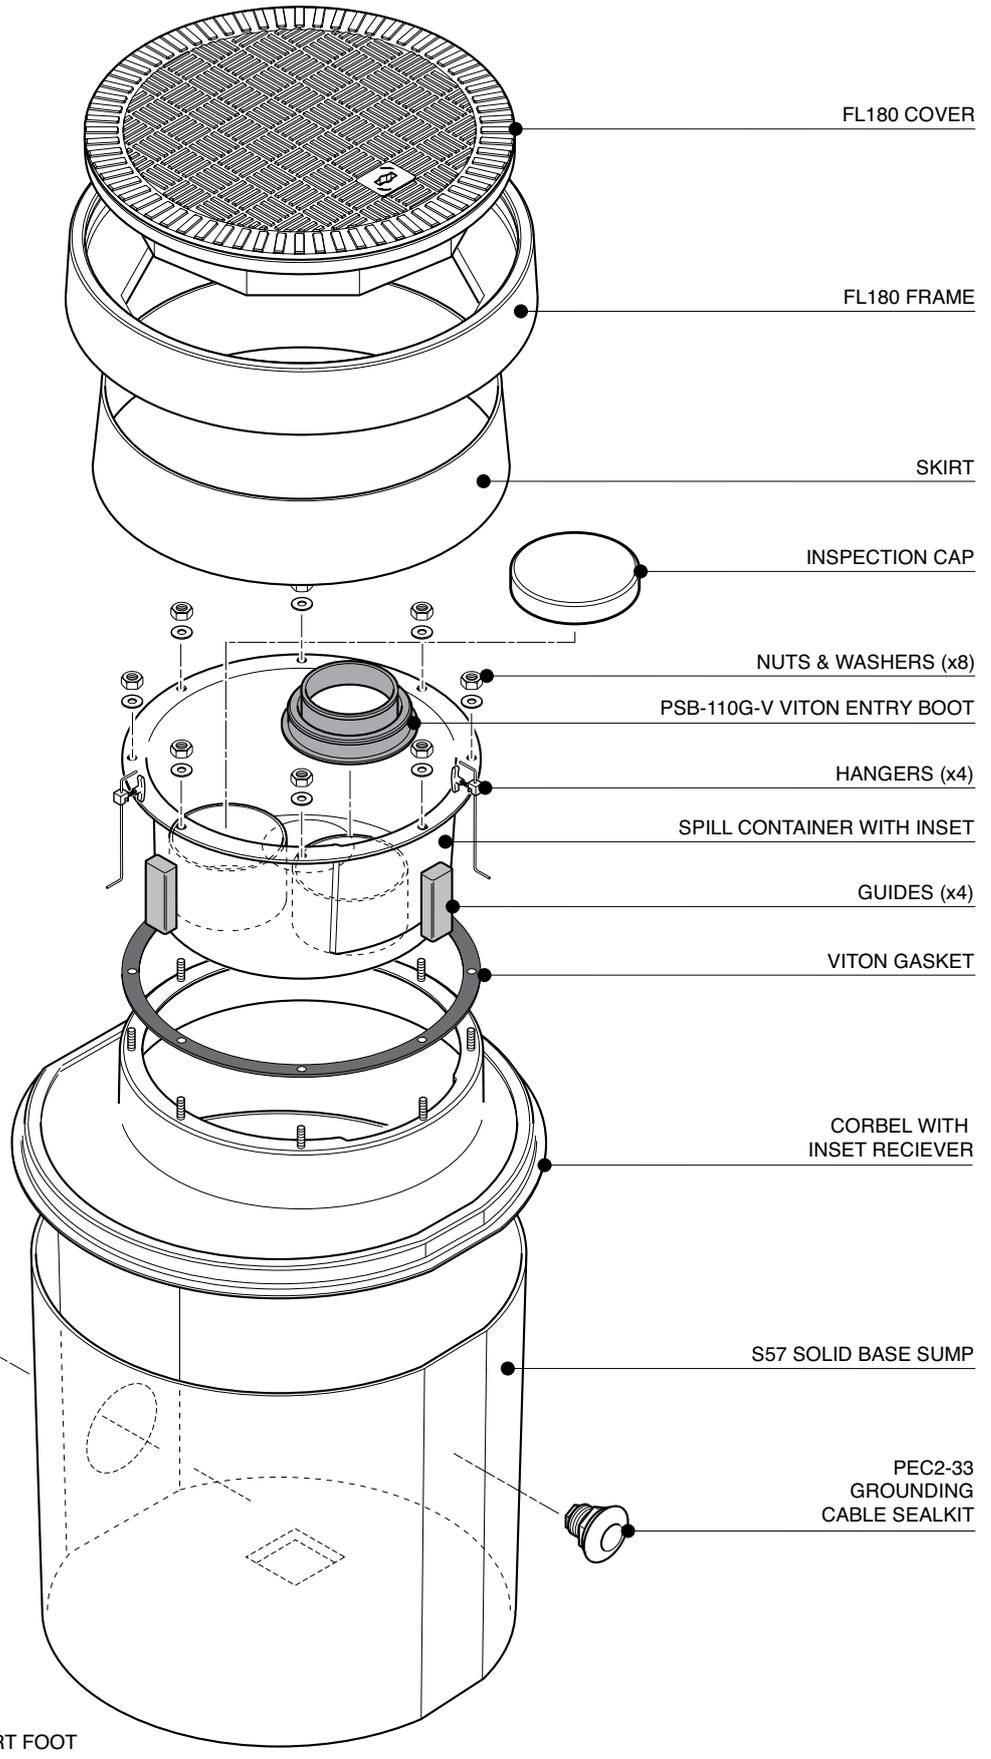

Secondary contained remote fill sump. 23" dia. x 25" deep solid base sump and a sealed secondary spill container. 18" dia flat sealed cover and frame. Includes PSB-110-PS 4 5/16" dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOWDER COMPANY

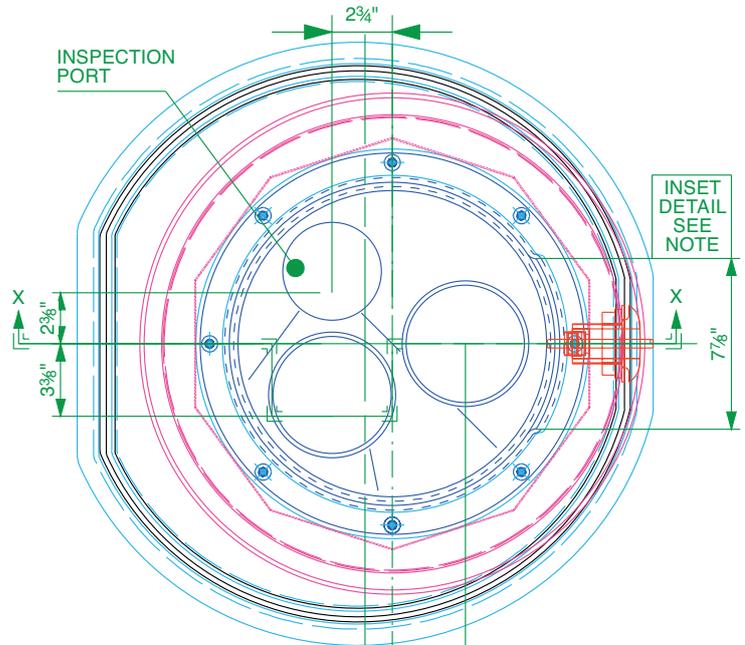

INSET
DETAIL
SEE
NOTE

DETAIL 'A'

8 No. M6 x 30
STUDS

NUT

WASHER

GASKET




SUMP C/L

3 3/8" (FILL LINE C/L)

1 1/4" (SPILL CONT. C/L)

C/O 18"

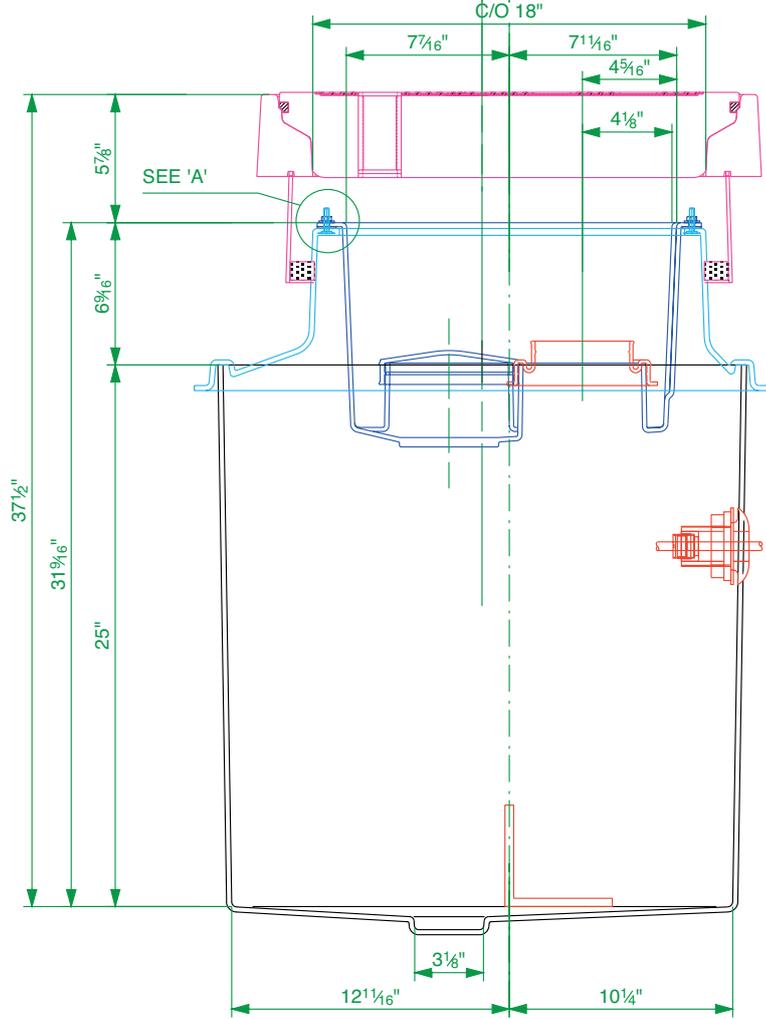

SEE 'A'

NOTE:

THE SPILL CONTAINER AND
AND CORBEL CONTAIN A
SPECIAL INSET SECTION TO
ALLOW FOR EASY ACCESS
OF GOOSENECK DELIVERY
HOSES

Spill Containment
Capacity = 5.8 US Gal.

SECTION X - X

Secondary contained remote fill sump. 23" dia. x 25" deep solid base sump and a sealed secondary spill container. 18" dia flat sealed cover and frame. Includes PSB-110-PS 4 5/16" dia. spill tray fill riser sealkit and grounding cable sealkit.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



VERY IMPORTANT
 OUTER EDGE OF FRAME SET WITH
 ABOVE GENERAL FORECAST AREA WITH
 CONCRETE RAMPED AT OVER


TYPICAL INSTALLATION

CONCRETE

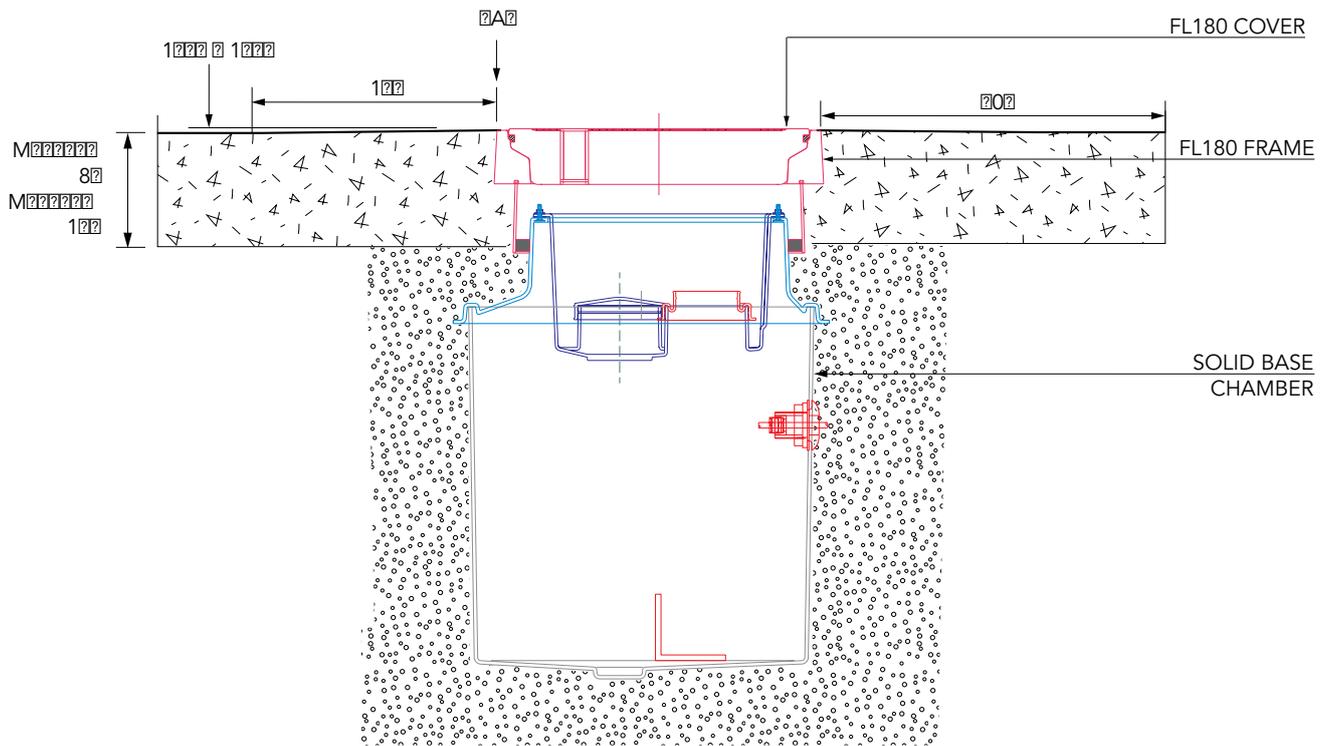


ALTERNATIVE INSTALLATION ADVICE

TARMACADAM

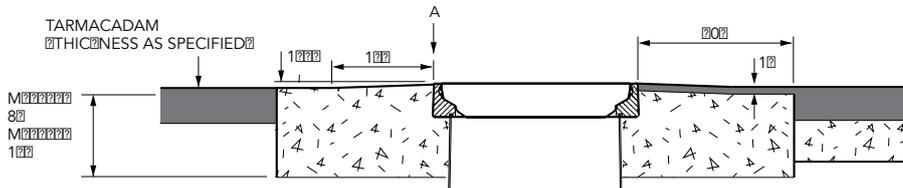

SETTS

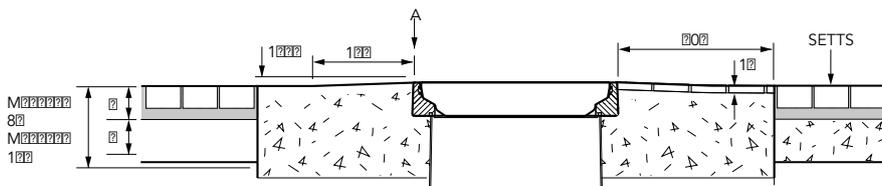

Secondary contained remote fill sump. 23" dia. x 25" deep solid base sump and a sealed secondary spill container. 18" dia flat sealed cover and frame. Includes PSB-110-PS 4 5/16" dia. spill tray fill riser sealkit and grounding cable sealkit.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

