


47" diameter bolted base chamber with a corbel, adjustable skirt, non-structural internal lid with a central hole and round 35" flat sealed cover with central manual dip cover. Round tank flange.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



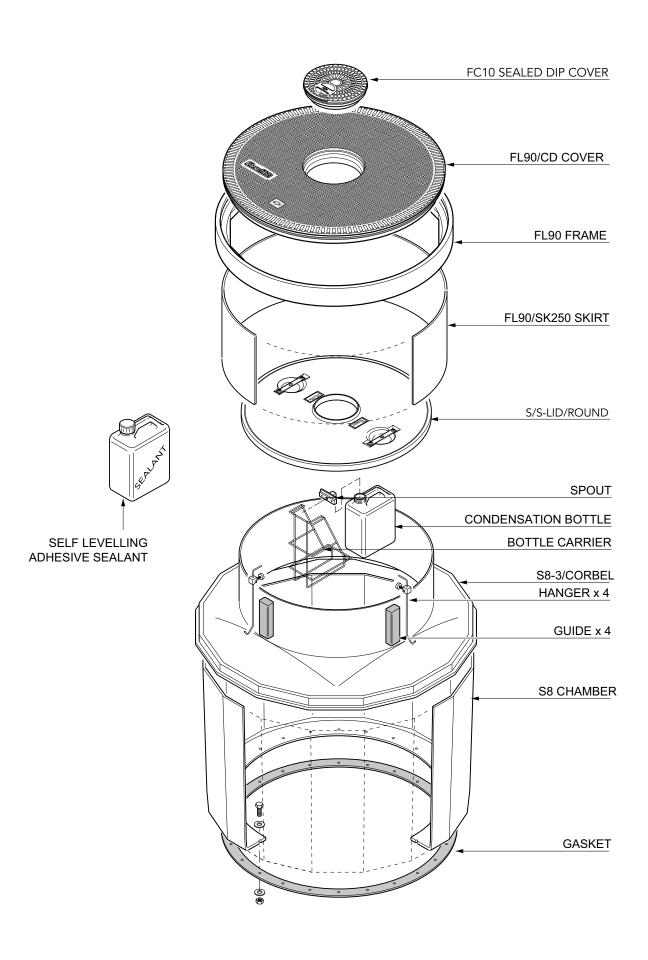


47" diameter bolted base chamber with a corbel, adjustable skirt, non-structural internal lid with a central hole and round 35" flat sealed cover with central manual dip cover. Round tank flange.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



**S8-390-CD Issue:** 12/06/2016 **Page:** 2 of 4 © Copyright

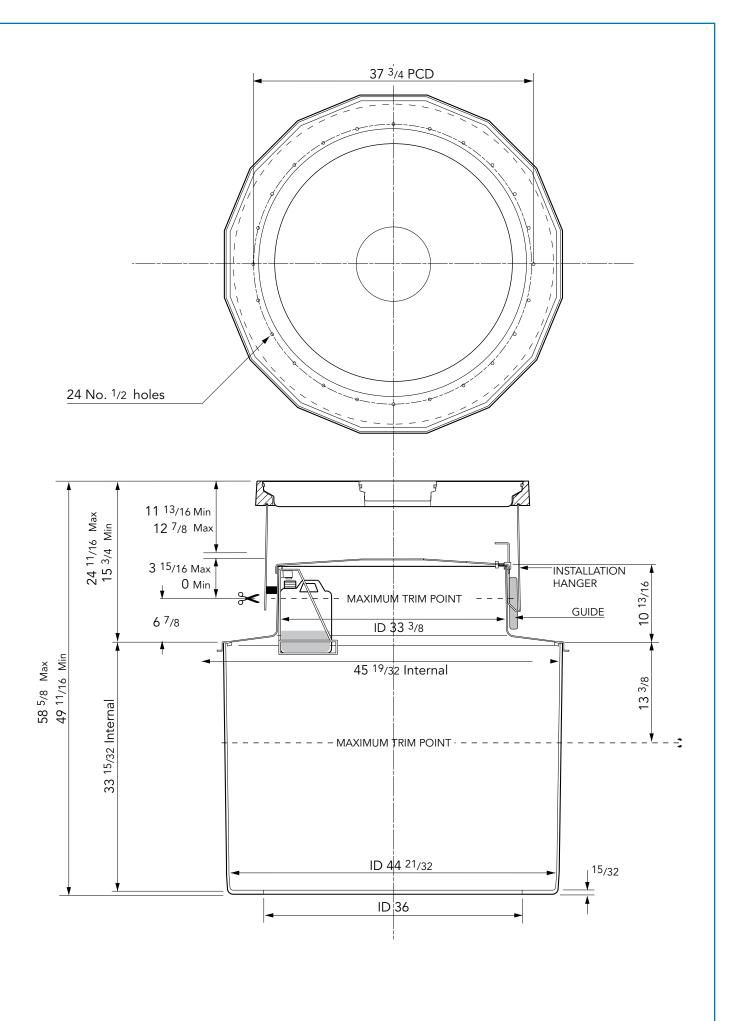


47" diameter bolted base chamber with a corbel, adjustable skirt, non-structural internal lid with a central hole and round 35" flat sealed cover with central manual dip cover. Round tank flange.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




**S8-390-CD Issue:** 12/06/2016 **Page:** 3 of 4 © Copyright



## TYPICAL INSTALLATION

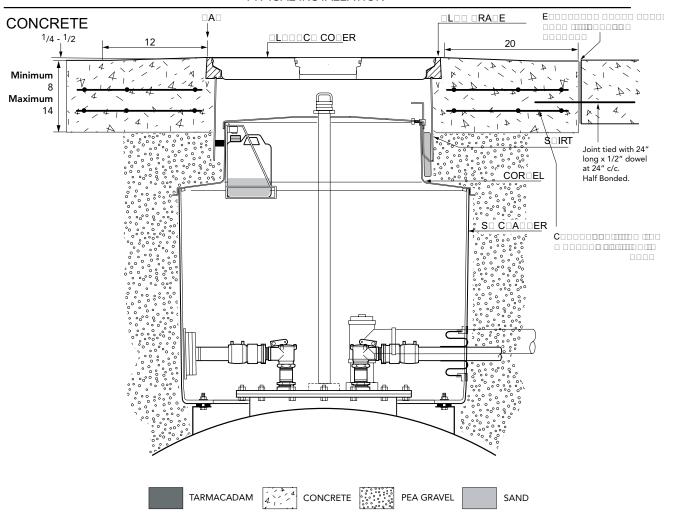

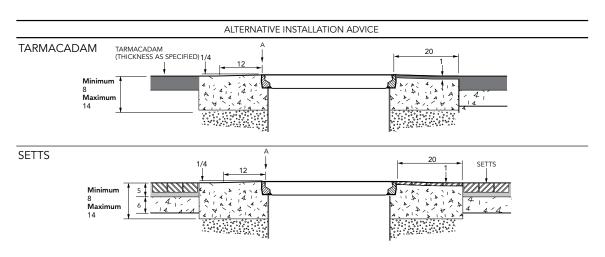

47" diameter bolted base chamber with a corbel, adjustable skirt, non-structural internal lid with a central hole and round 35" flat sealed cover with central manual dip cover. Round tank flange.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



**S8-390-CD Issue:** 12/06/2016 **Page:** 4 of 4 © Copyright