

Load Rating	Cover Weight	Frame Weight
A15	16 Kg	12 Kg
B125	20 Kg	12 Kg
C250*	31.5 Kg	12 Kg
TCR	31.5 Kg	12 Kg
D400	43 Kg	12 Kg
E600	50 Kg	16 Kg
F900	52 Kg	16 Kg

\* Awarded British Standard Kite Mark

760mm x 760mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.




# CONCRETE

VERY IMPORTANT

OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPO RTANT  
The underside of the frame must be adequately supported by concrete.

Expansion joint filled with petrol resistant mastic.

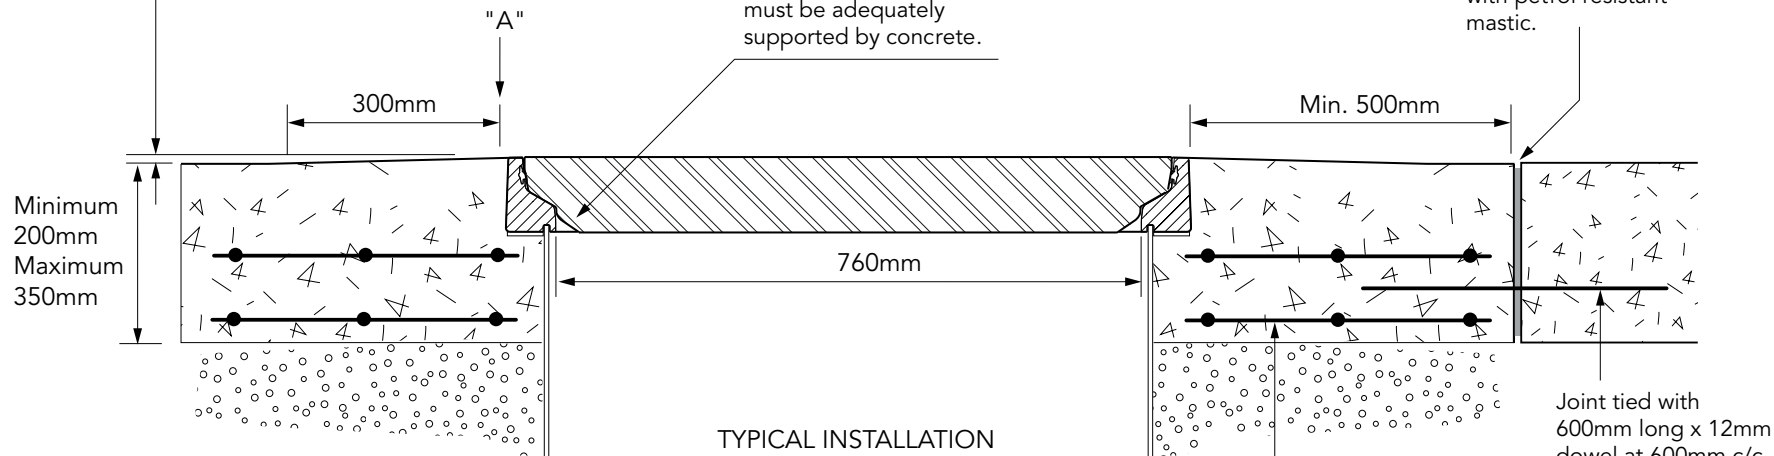


TYPICAL INSTALLATION




Concrete reinforced with 2 layers of reinforcement mesh.

Joint tied with 600mm long x 12mm dowel at 600mm c/c. Half bonded

## TARMACADAM

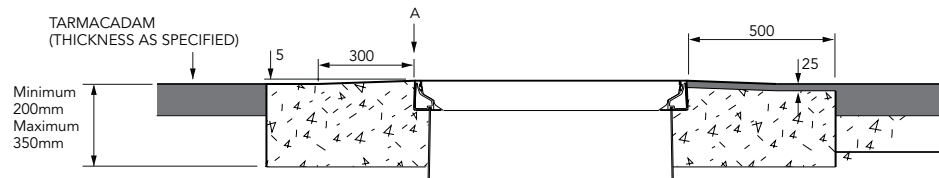

## SETTS

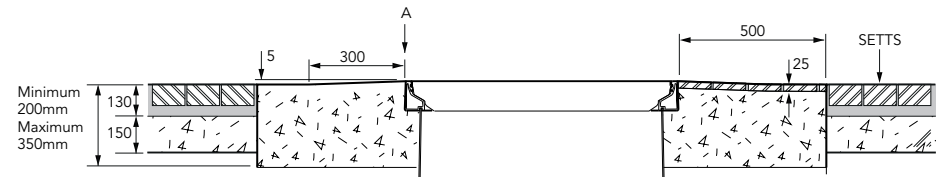

760mm x 760mm flat sealed composite cover with an aluminium frame.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

