

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump with a sealed secondary spill container. 450mm dia flat sealed cover and frame. Sealkits included.


For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

Page: 1 of 4


Issue: 17/04/2019

© Copyright



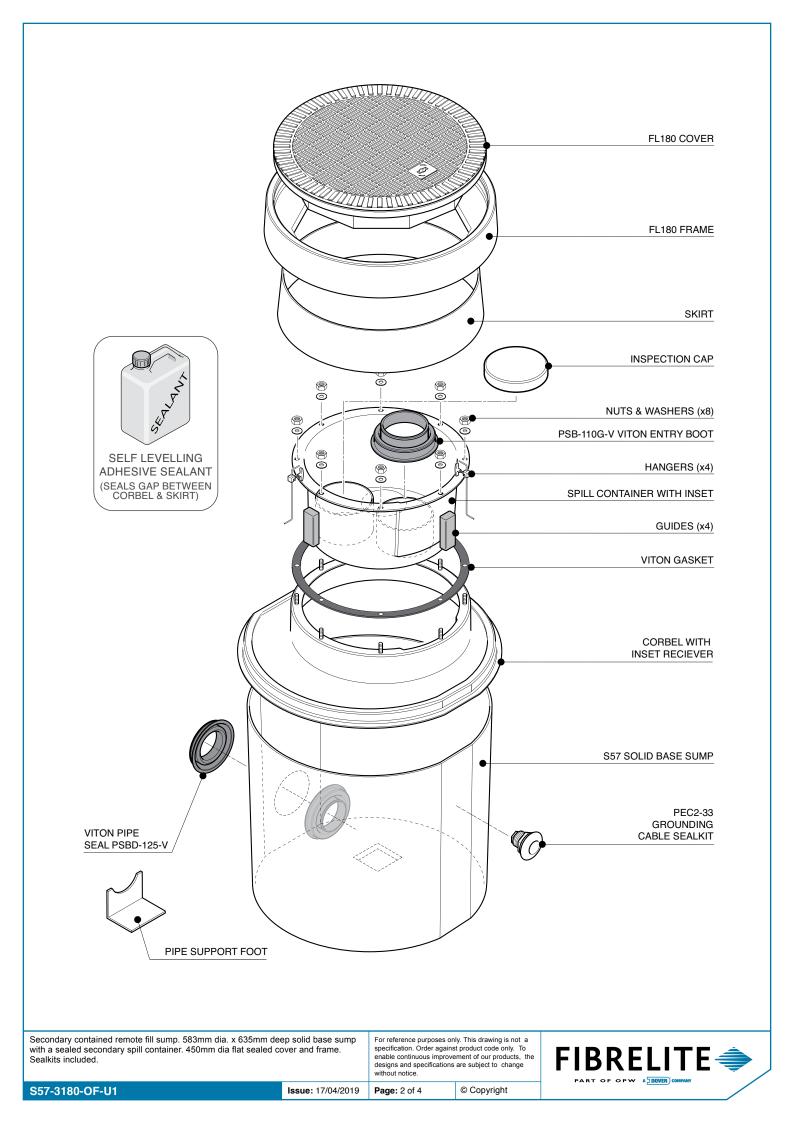

ITEM	DESCRIPTION	CODE	QTY
1	Fibrelite FL180 Cover	FL180	1
2	Fibrelite FL180 Frame	FL180F	1
3	Fibrelite 130mm Deep Skirt	FL180-SK130	1
4	Spill Container Gasket		1
5	Fibrelite Self levelling Seal	S-CS-SEALANT	1
6	Fibrelite Corbel	S57-3180-CORBEL	1
7	Fibrelite Spill Container	S57-3180-OF-SC	1
8	Fibrelite Inspection Cap		1
9	Fibrelite Grounding Cable Seal	PEC2-33	1
10	Fibrelite Grounding Cable Strap		1
11	Fibrelite 570 x 635mm deep Sump	S57	1
12	Fibrelite Pipe Support Foot	PSF-110	1
12		PSF-110	
ITEM	4" FILL Fibrelite Viton Ø125mm Double	CODE	QTY
ITEM 13	4" FILL Fibrelite Viton Ø125mm Double Sided Pipe Entry Seal	CODE PSBD-125-V	QTY 1
ITEM 13 14	4" FILL Fibrelite Viton Ø125mm Double Sided Pipe Entry Seal Riser Pipe 4"	CODE PSBD-125-V 001-110-XXX-E	QTY 1
ITEM 13 14 15	4" FILL Fibrelite Viton Ø125mm Double Sided Pipe Entry Seal Riser Pipe 4" EN Pipe - 125mm Secondary	CODE PSBD-125-V 001-110-XXX-E 000-125-XXX-SC-E	QTY 1 1
ITEM 13 14 15 16	4" FILL Fibrelite Viton Ø125mm Double Sided Pipe Entry Seal Riser Pipe 4" EN Pipe - 125mm Secondary Primary 90° Elbow	CODE PSBD-125-V 001-110-XXX-E 000-125-XXX-SC-E 03-110-EIF	QTY 1 1 1

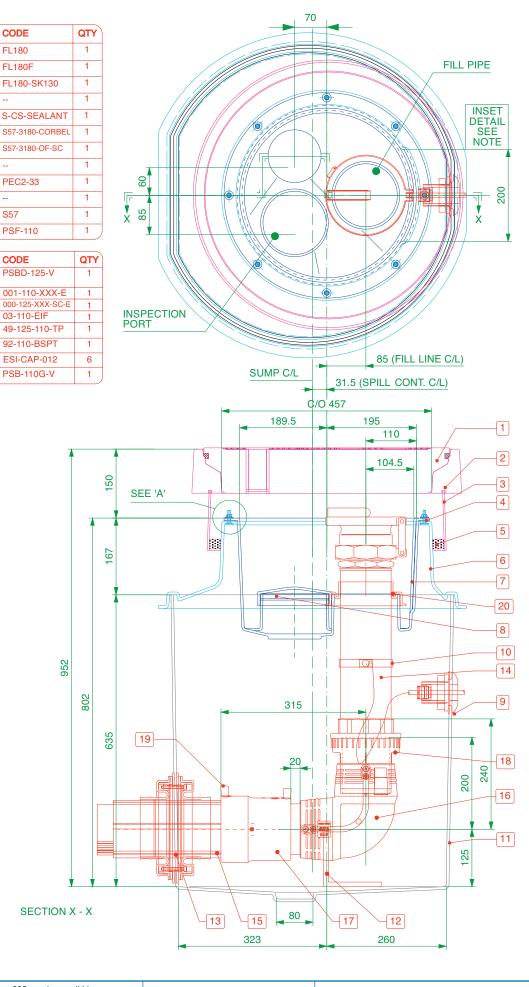

Secondary contained remote fill sump. 583mm dia. x 635mm deep solid base sump with a sealed secondary spill container. 450mm dia flat sealed cover and frame. Sealkits included.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

© Copyright

Page: 3 of 4

Issue: 17/04/2019

FIBRELITE

PART OF OPW A DOVER



19

20

CAP, ANTI-STATIC, 12

DETAIL 'A'

8 No. M6 x 30 STUDS

NUT

WASHER

GASKET

NOTE:

HOSES

THE SPILL CONTAINER AND AND CORBEL CONTAIN A SPECIAL INSET SECTION TO ALLOW FOR EASY ACCESS OF GOOSENECK DELIVERY

Spill Containment

Capacity = 22 Litres

PSB-110G Viton Entry Boot



VERY IMPORTANT OUTER EDGE "A" OF FRAME SET 5 - 10MM

ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM.

TYPICAL INSTALLATION

CONCRETE

