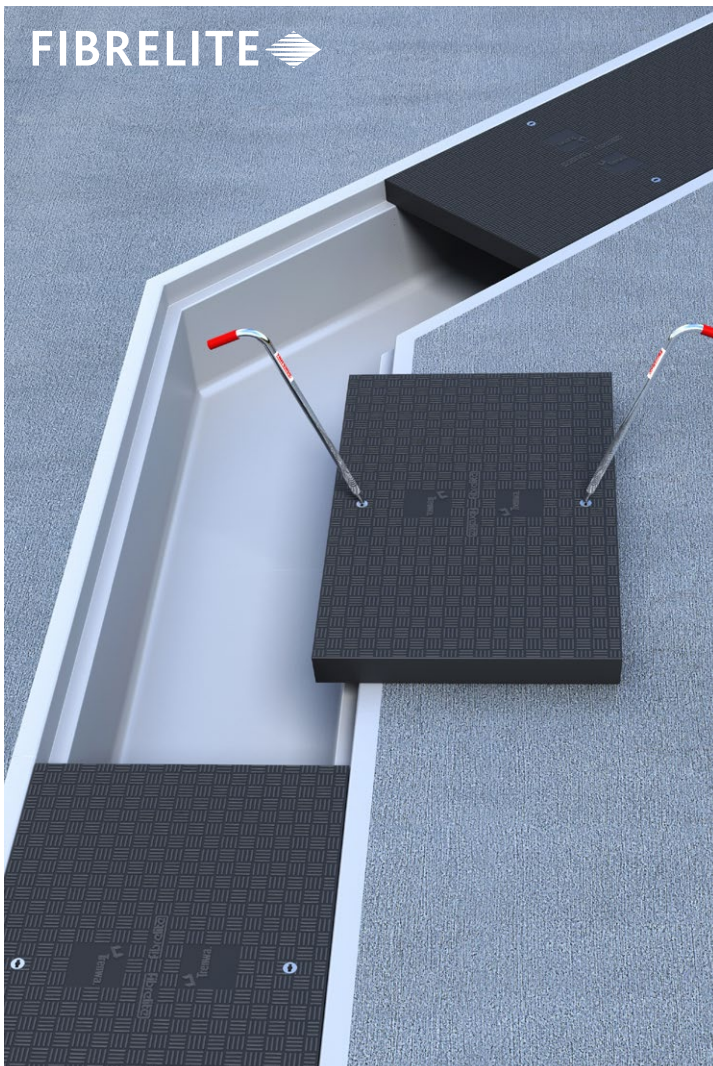


Fibrelite Road Crossing Trench Systems





Trenwa and Fibrelite are bringing advanced FRP composite technology to the cable trench industry with an innovative molded fiberglass trench and lid system.

The new Fibrelite trenches are designed with a proprietary beam structure that can support heavy vehicle loading. The modular trench system includes 5 ft. long straight trench sections, 45° angles, a universal cross/tee section as well as end walls, and is designed to work with Trenwa's Fibrelite LHF H20 load rated lids.

Light enough to install manually and to significantly reduce freight costs, the Fibrelite trench system is also strong enough to withstand heavy vehicle traffic and harsh field conditions. The Fibrelite trench and lids have been load tested individually and as a system to meet AASHTO H20/HS20 load ratings.



20" & 30" Wide Fibrelite Road Crossing Trenches

	TYPE	20" WIDE TRENCH			30" WIDE TRENCH		
		Part Number	Size	Weight	Part Number	Size	Weight
	5 ft Section	BHG2016-60	20" x 16"	111 lbs.	BHG3016-60	30" x 16"	123 lbs.
	45° Section	BHG2016M45	20" x 16"	142 lbs.	BHG3016M45	30" x 16"	158 lbs.
	Universal Cross / T Section	BHG2016X20-60	60" x 60"	144 lbs.	BHG3016X30-60	60" x 60"	142 lbs.
	End Wall	WHG2016	33" x 18"	6 lbs.	WHG3016	43" x 22"	8 lbs.

Engineering Specifications

- Lightweight – can be installed without cranes or lifting equipment
- Shiplapped ends for easy alignment
- Walls will not flex and do not need bracing during installation and backfilling
- Proof load tested to 40,000 lbs
- 5 ft standard length which can be field cut for shorter lengths
- Depth – 16" nominal inside
- Width – 20" to 30" nominal inside
- Lids - these bases utilize our Fibrelite LHF series lids: high performance, lightweight, ergonomic, and suitable for frequent traffic crossing
- Solid bottom bases – openings & drain holes can be field cut
- Easy to field cut: no cracking or chipping
- No metal reinforcing: ideal for high voltage applications
- Molded walls are consistent dimensionally
- Cable clips & Unistrut, etc. can be field mounted

Trenwa – Tough Enough to Trust

Family owned and operated since 1961 – precast concrete trench is our specialty. With four modern, strategically located plants, we are the country's leading producer of durable, precast trench systems in the broadest range of types and sizes.

Tel: (859) 781 0831
 Fax: (859) 781 1085
 Email: info@trenwa.com
 Address: 1419 Alexandria Pike,
 Fort Thomas, KY 41075, USA

FIBRELITE 
 PART OF OPW a DOVER company



Lightweight: can be installed without cranes or lifting equipment



Shipped ends for easy alignment



Walls will not flex and do not need bracing during installation and backfilling



Lids: these bases utilize our lightweight Fibrelite - LHF series lids



Anti-slip/skid properties far exceeding health and safety advisory limits



Solid bottom bases: limited openings and drain holes can be field cut

Trenwa – Tough Enough to Trust





Family owned and operated since 1961 – precast concrete trench is our specialty. With four modern, strategically located plants, we are the country's leading producer of durable, precast trench systems in the broadest range of types and sizes.

Tel: (859) 781 0831
 Fax: (859) 781 1085
 Email: info@trenwa.com
 Address: 1419 Alexandria Pike,
 Fort Thomas, KY 41075, USA



PART OF OPW a DOVER company

Fibrelite Lightweight Composite Lids for HS20 Road Crossing Trenches

	TYPE	COVERS FOR THE 20" WIDE TRENCH			COVERS FOR THE 30" WIDE TRENCH		
		Item Code*	Size	Weight	Item Code*	Size	Weight
	5 ft Section	LHF26-60	26" x 60"	80 lbs.	LHF36-60	36" x 60"	118 lbs.
	Left Hand 45° Section	LHG26L22.5-43 1/4	26" x 44 1/4"	98 lbs.	LHG36L22.5-43 1/4	36" x 44 1/4"	73 lbs.
	Right Hand 45° Section	LHG26R22.5-43 1/4	26" x 44 1/4"	98 lbs.	LHG36R22.5-43 1/4	36" x 44 1/4"	73 lbs.
	Universal Cross / T Section	LHG26T26-60	26" x 60"	110 lbs.	LHG36T26-60	36" x 60"	154 lbs.
	Lifting Handle	FL7	7" x 31"	The ergonomic FL7 lifting handles can be used with all Fibrelite trench covers.			

* Code relates to cover only and should be ordered with the relevant Fibrelite FRP trench (page 2)

Benefits

- Lightweight FRP composite construction
- Chip and crack resistant
- Safe, fast manual removal and replacement with the Fibrelite FL7 lifting handles
- Freeze / thaw cycle impervious
- Non-conductive
- Chemically inert
- Exceeds service requirements
- Anti-slip / anti-static surface
- Non-corrosive
- Custom colors available
- No scrap value
- Weather resistant
- Maintenance-free
- UV stable

Trenwa – Tough Enough to Trust

Family owned and operated since 1961 – precast concrete trench is our specialty. With four modern, strategically located plants, we are the country's leading producer of durable, precast trench systems in the broadest range of types and sizes.

Tel: (859) 781 0831
 Fax: (859) 781 1085
 Email: info@trenwa.com
 Address: 1419 Alexandria Pike,
 Fort Thomas, KY 41075, USA

FIBRELITE 
 PART OF OPW a **DOVER** company